

4 TERMINAL LOW DROPOUT VOLTAGE REGULATOR

The KIA78R $\times \times$ series are Low Dropout Voltage Regulator suitable for various electronic equipments. It provides constant voltage power source with TO-220IS-4 terminal surface mount type PKG.


The Regulator has multi function such as over current protection, overheat protection and ON/OFF control.

FEATURES

- 1.0A Output Low Dropout Voltage Regulator.
- Built in ON/OFF Control Terminal.
- Built in Over Current Protection, Over Heat Protection Function.

LINE UP

ITEM	OUTPUT VOLTAGE (Typ.)	UNIT
KIA78R05PI	5	V
KIA78R06PI	6	
KIA78R08PI	8	
KIA78R09PI	9	
KIA78R10PI	10	
KIA78R12PI	12	
KIA78R15PI	15	
KIA78R25PI	2.5	
KIA78R33PI	3.3	
KIA78R35PI	3.5	

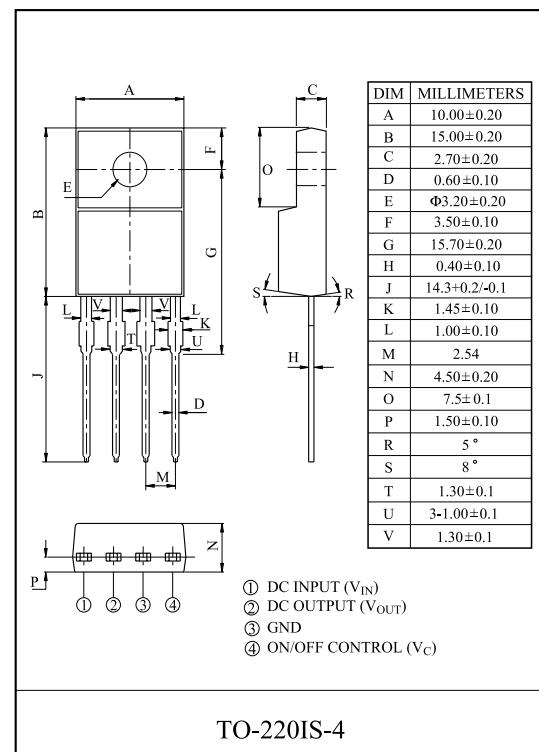**MAXIMUM RATINGS (Ta=25°C)**

CHARACTERISTIC	SYMBOL	RATING	UNIT	REMARK
Input Voltage	V_{IN}	35	V	-
ON/OFF Control Voltage	V_C	35	V	-
Output Current	I_O	1	A	-
Power Dissipation 1	P_{D1}	1.5	W	No Heatsink
Power Dissipation 2	P_{D2}	15	W	Infinite Heatsink
Operating Junction Temperature	$T_{J(opr)}$	-40 ~ 150		-
Storage Temperature	T_{stg}	-45 ~ 150		-
Soldering Temperature (10sec)	T_{sol}	260		-

KIA78R05PI~KIA78R35PI

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, $I_O=0.5A$, $T_a=25^\circ C$, Note1.)

CHARACTERISTIC		SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	KIA78R05PI	V _O	-	4.88	5.0	5.12	V
	KIA78R06PI		-	5.85	6.0	6.15	
	KIA78R08PI		-	7.80	8.0	8.2	
	KIA78R09PI		-	8.78	9.0	9.22	
	KIA78R10PI		-	9.75	10.0	10.25	
	KIA78R12PI		-	11.70	12.0	12.30	
	KIA78R15PI		-	14.70	15.0	15.30	
	KIA78R25PI		-	2.438	2.50	2.562	
	KIA78R33PI		-	3.220	3.30	3.380	
	KIA78R35PI		-	3.413	3.50	3.587	
Load Regulation		Reg Load	5mA I_{OUT} 1A	-	0.1	2.0	%
Line Regulation		Reg Line	(Note 2)	-	0.5	2.5	%
Temperature Coefficient of Output Voltage		T _C V _O	T _j =0 125	-	± 0.02	± 0.05	%/
Ripple Rejection		R · R	-	45	55	-	dB
Drop Out Voltage		V _D	$I_O=1A$, $V_{IN}=0.95 V_{OUT}$	-	-	0.5	V
Output ON state for control Voltage		V _{C(ON)}	-	2.0	-	-	V
Output ON state for control Current		I _{C(ON)}	V _C =2.7V	-	-	20	μA
Output OFF state for control Voltage		V _{C(OFF)}	-	-	-	0.8	V
Output OFF state for control Current		I _{C(OFF)}	V _C =0.4V	-	-	-0.4	mA
Quiescent Current		I _Q	$I_O=0$	-	-	10	mA


Note1) V_{IN} of KIA78R05=7V

- " KIA78R06=8V
- " KIA78R08=10V
- " KIA78R09=15V
- " KIA78R10=16V
- " KIA78R12=18V
- " KIA78R15=21V
- " KIA78R25=4.2V
- " KIA78R33=5.0V
- " KIA78R35=5.2V
- " KIA78R06=7~15V
- " KIA78R08=9~25V
- " KIA78R09=10~25V
- " KIA78R10=11~26V
- " KIA78R12=13~29V
- " KIA78R15=16~32V
- " KIA78R25=3.2~10V
- " KIA78R33=4.0~10V
- " KIA78R35=4.2~10V

Note2) V_{IN} of KIA78R05=6~12V

KIA78R05PI~KIA78R35PI

BLOCK DIAGRAM

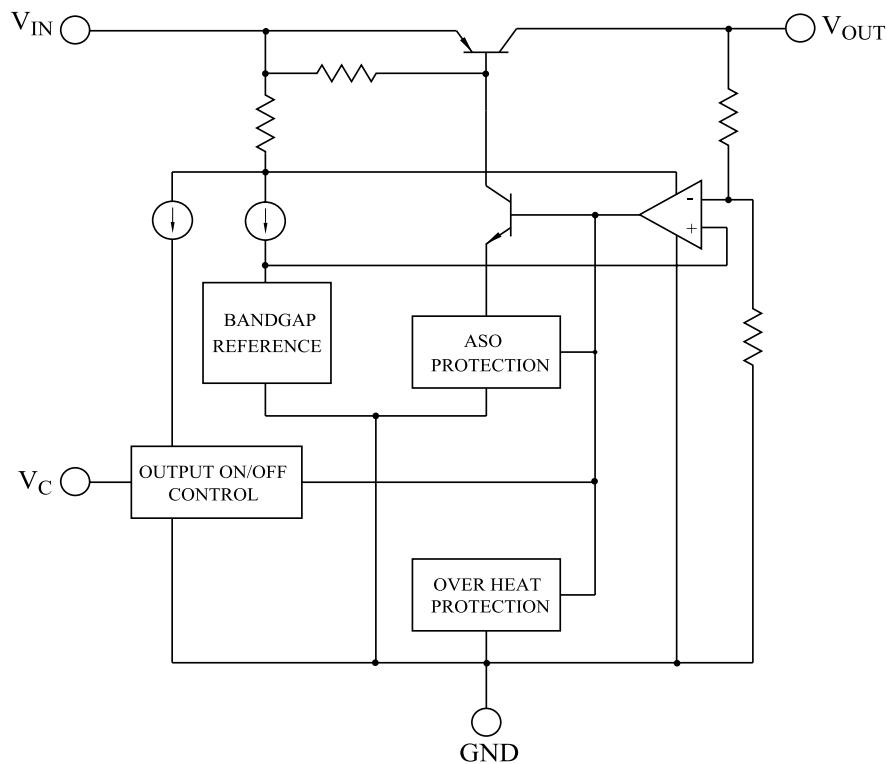

KIA78R05PI~KIA78R35PI

Fig. 1 Standard Test Circuit

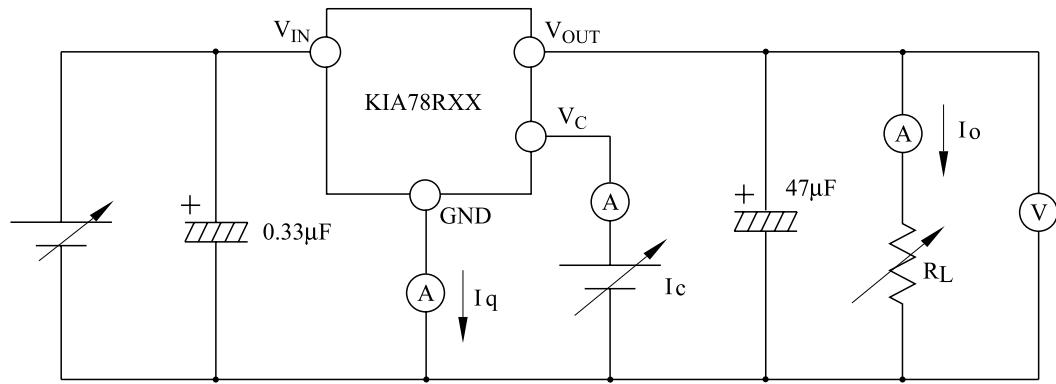


Fig. 2 Ripple Rejection Test Circuit


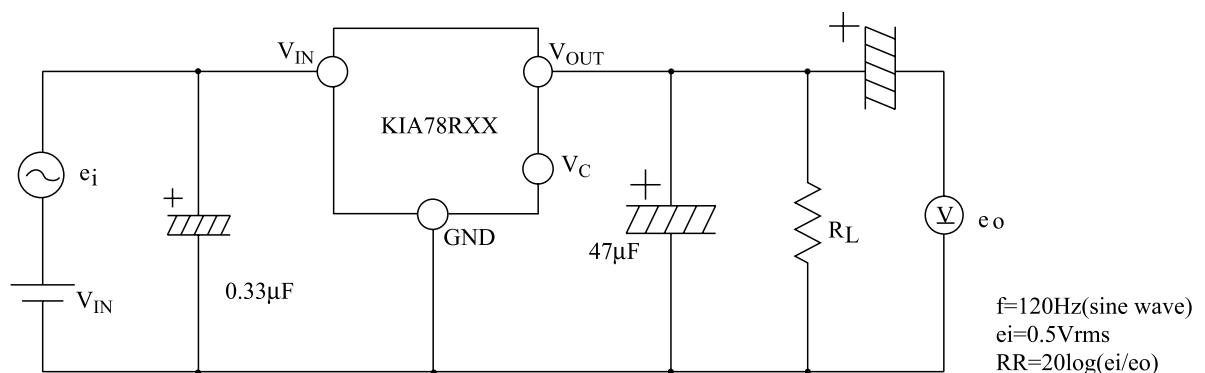


Fig. 3 Application Circuit for Standard

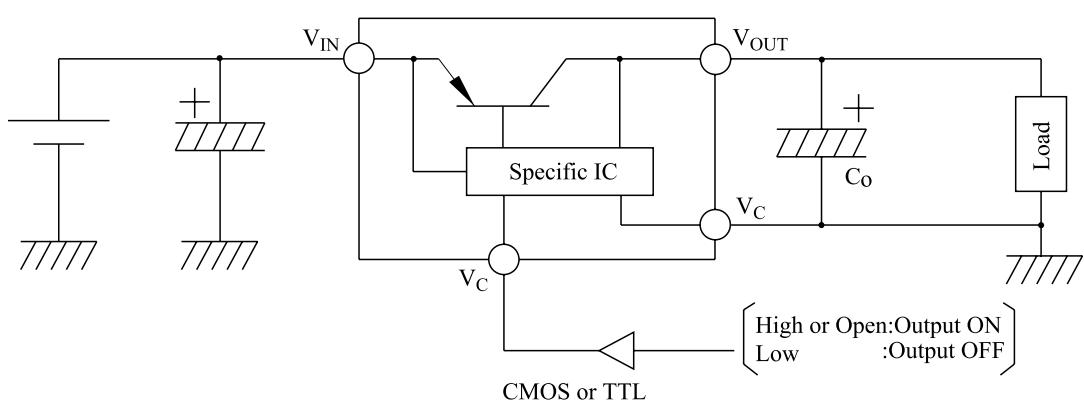

KIA78R05PI~KIA78R35PI

Fig.4 P_D - T_a (PI-Type : TO-220IS-4)

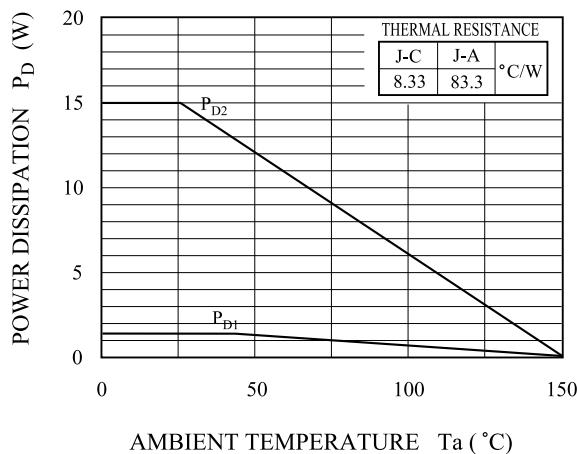


Fig. 5 V_{OUT} - I_{OUT}

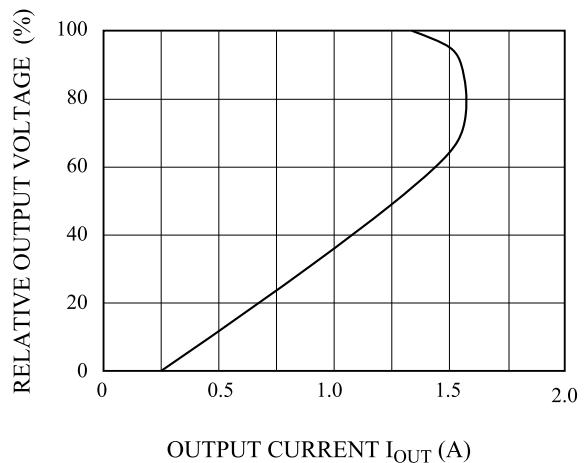


Fig. 6 ΔV_O - T_j

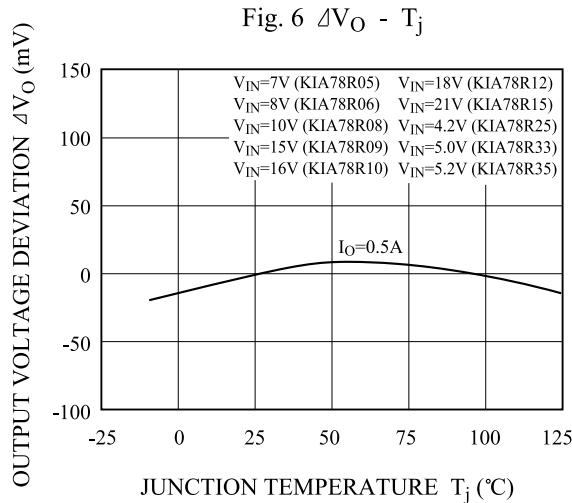


Fig. 7 V_D - T_j

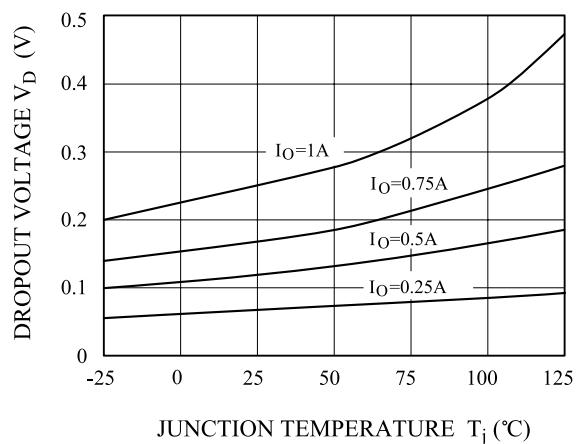


Fig. 8 I_q - T_j


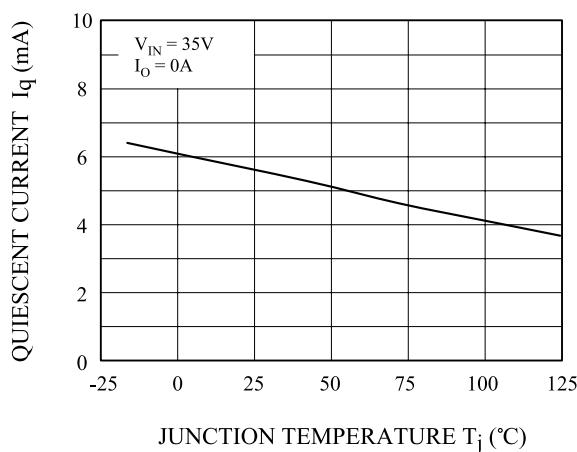


Fig. 9 R.R - f

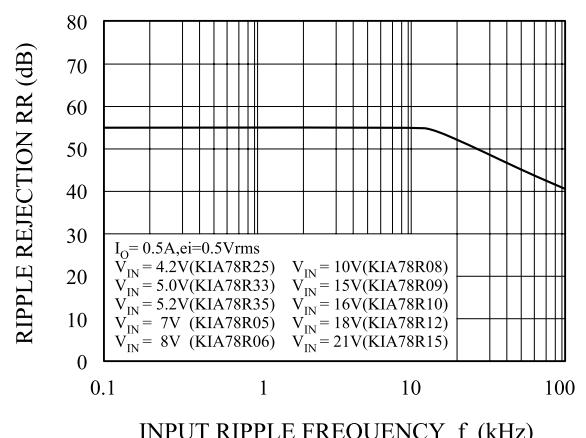

KIA78R05PI~KIA78R35PI

Fig. 10 R.R - I_{OUT}

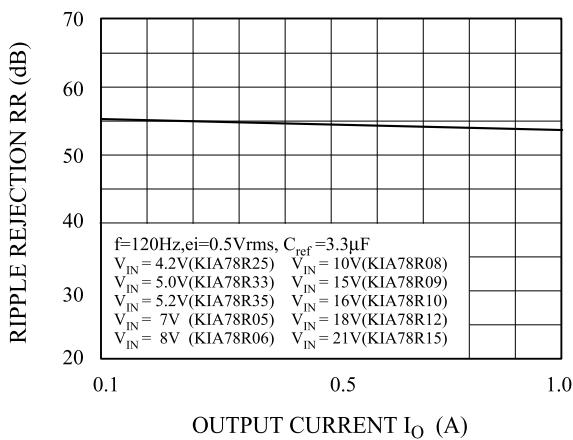


Fig. 11 V_{OUT} - V_{IN} (KIA78R05)

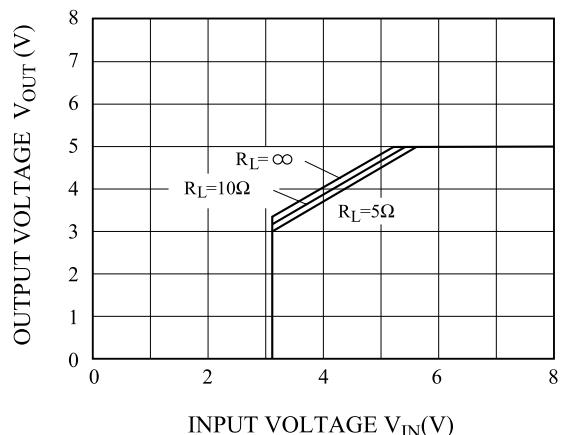


Fig. 12 V_{OUT} - V_{IN} (KIA78R06)

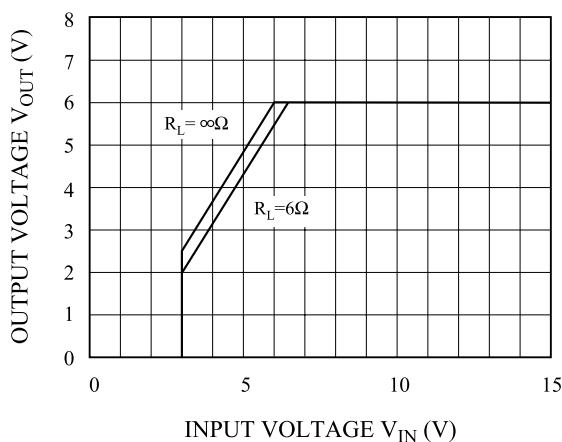


Fig. 13 V_{OUT} - V_{IN} (KIA78R08)

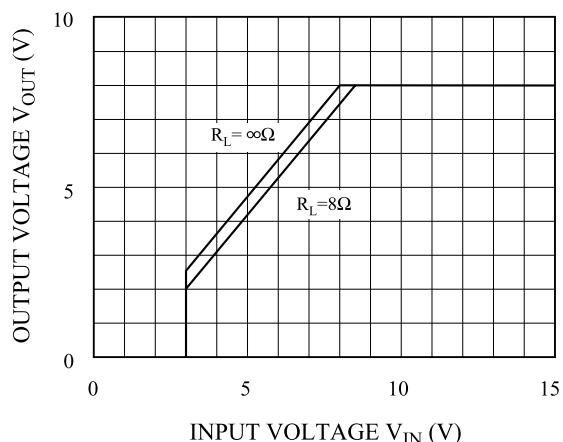


Fig. 14 V_{OUT} - V_{IN} (KIA78R09)


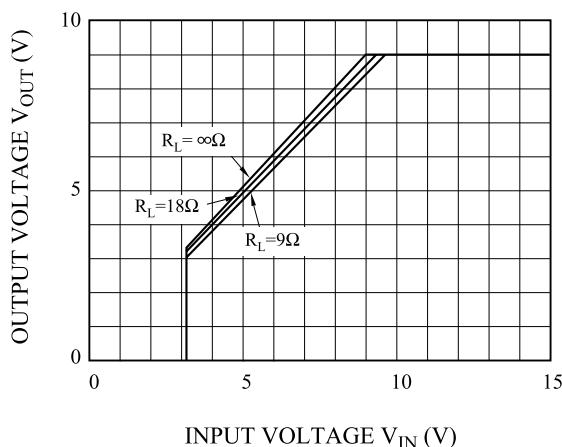


Fig. 15 V_{OUT} - V_{IN} (KIA78R10)

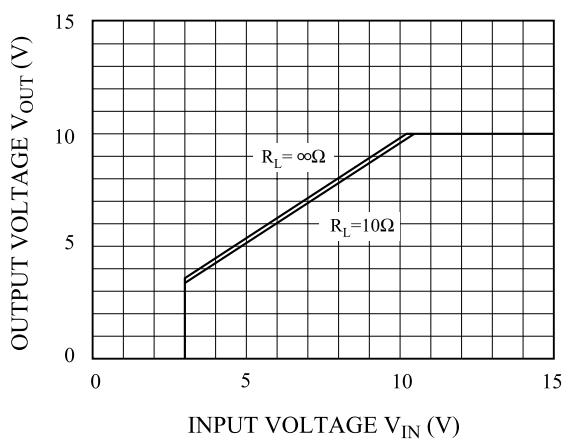

KIA78R05PI~KIA78R35PI

Fig. 16 V_{OUT} - V_{IN} (KIA78R12)

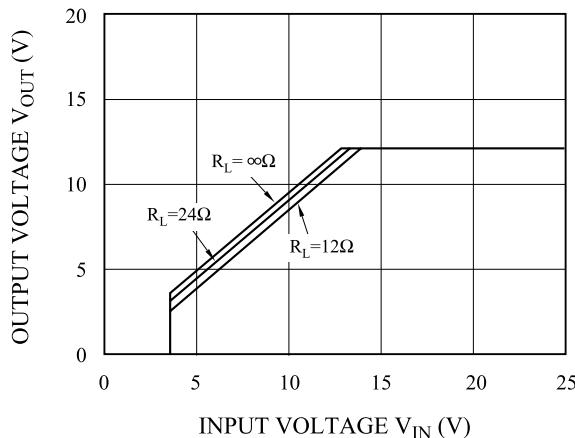


Fig. 17 V_{OUT} - V_{IN} (KIA78R15)

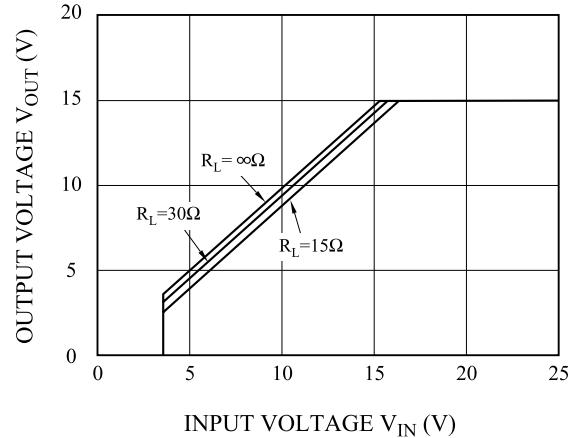


Fig. 18 I_{BIAS} - V_{IN} (KIA78R05)

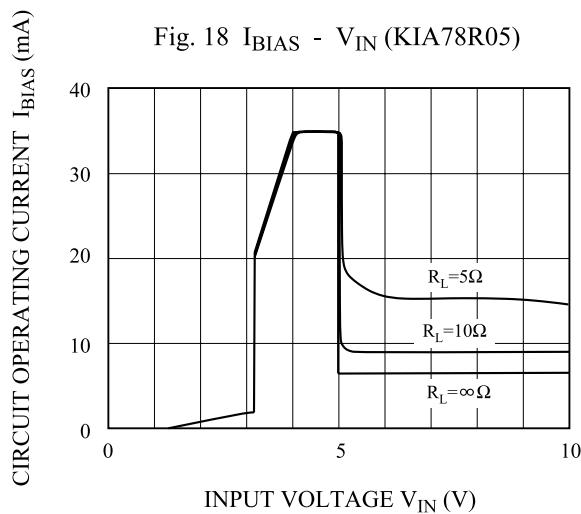


Fig. 19 I_{BIAS} - V_{IN} (KIA78R06)

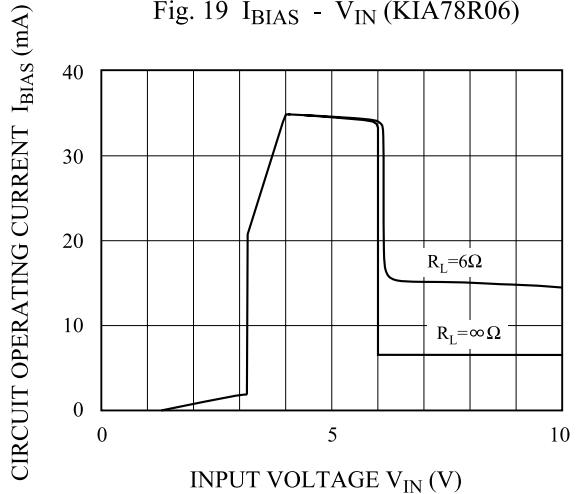


Fig. 20 I_{BIAS} - V_{IN} (KIA78R08)


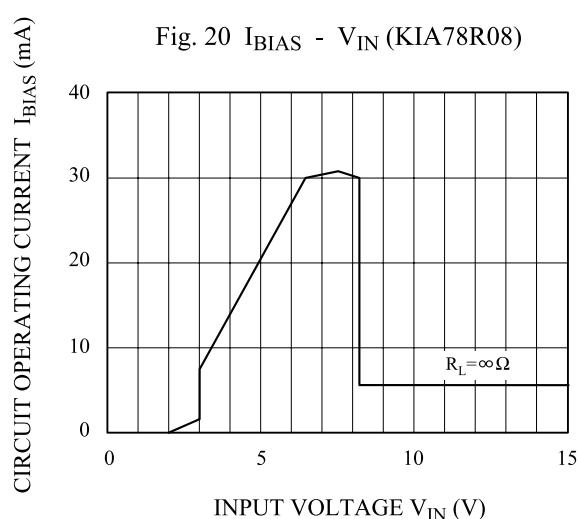


Fig. 21 I_{BIAS} - V_{IN} (KIA78R09)



KIA78R05PI~KIA78R35PI

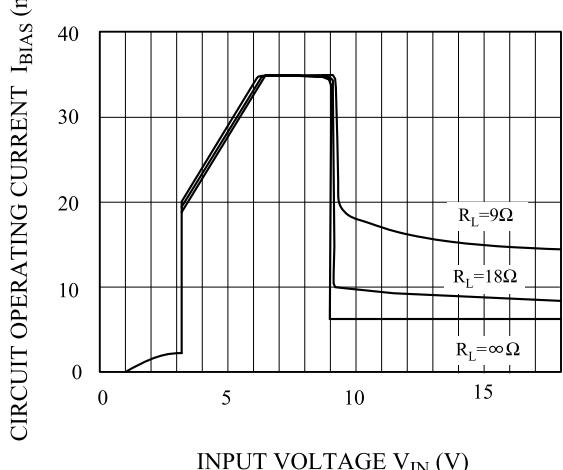