

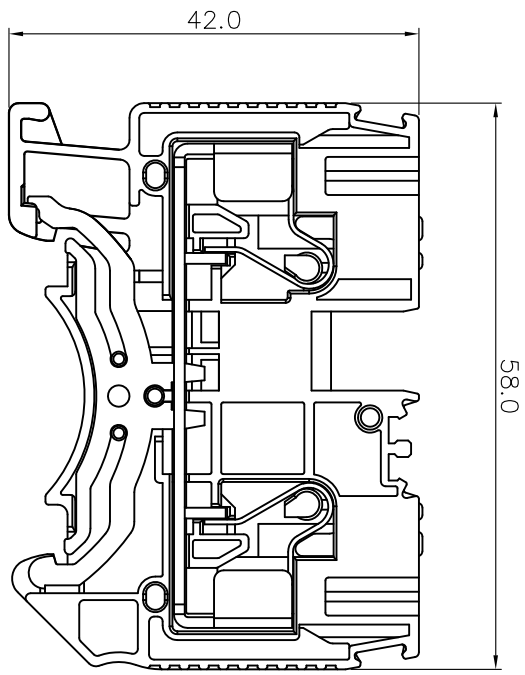



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

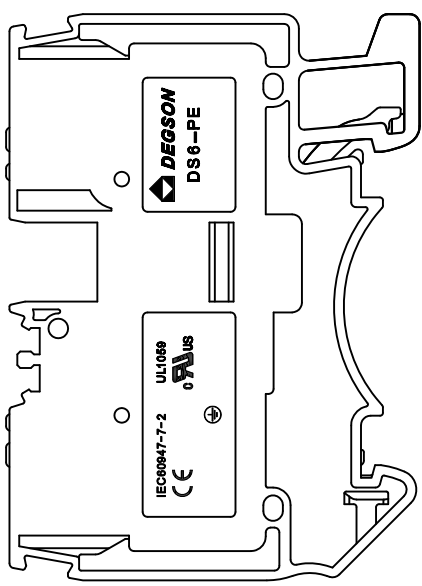

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	/
Rate Current(A)	/


2. Wire Range : 0.5~6mm<sup>2</sup>; sol: 10mm<sup>2</sup>

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.2mm
- 3.Stripping length : 10-12mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned Tolerances:

Pitch Range	In	Nominal Dimension	Range	mm	In	mm
Over	Over	Over	Over	Over	Over	Over
TO	TO	TO	TO	TO	TO	TO
6	10	24	30	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±1.00	±1.00	±1.00	±1.00	±1.30	±2*	±2*

6.RoHS Compliance

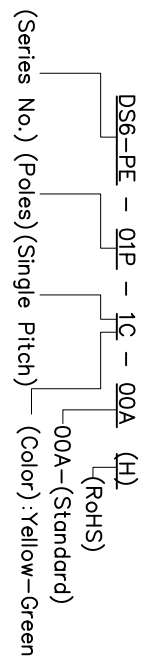

PART NO.:	/	NAME:	<b>DEGSON</b> ® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD:	/	TITLE:	CUSTOMER DRAWING	
CHKD:	/	DRAWING NO.:	/	SHEET
DRFT:	/	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	SCALE
				1:1

DETACHED LISTS

A 8 7 6 5 4 3 2 1