



Total Power International, Inc.

36-72VDC INPUT RANGE DC-DC CONVERTER HOT-SWAP CompactPCI QUAD OUTPUT 300 WATTS ACTIVE CURRENT SHARING SWITCHING POWER SUPPLIES TPDC301P-48B SERIES



FEATURES:

- 300W 3U X 8HP EUROCARD PACKAGE
- 36-72VDC NOMINAL 48VDC INPUT
- INTERNAL OR-ING DIODES FOR N+1 REDUNDANCY
- HOT-SWAPPABLE
- THIRD-WIRE CURRENT SHARING
- EMI MEET EN 55022 FCC CLASS A
- CE MARKING COMPLIANCE
- FULLY COMPLIANT WITH PICMG

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: Typ. 36-72Vdc, nominal input 48Vdc.
Input Connector: Positronic 47-pin PCIH47M400A1.
Inrush Current: Peak 46.2A at nominal 48Vdc.
Input Current: 7.58A at nominal input 48Vdc at full load.
 0.16A at nominal input 48Vdc at no-load.
Dielectric Withstand: Meet IEC 60950-1 regulation.
EMI: Meet EN 55022 FCC Class A.
Remote ON/OFF: Available at [INH#] & [EN#] pins.
Power Fail Signal: Available at [FAL#] pin.
Status LED: <Green> means valid input voltage.
 <Amber> means a critical fault.
Thermal Protection (OTP): Installed NTC for thermal sensor at [DEG#] pin.

OUTPUT SPECIFICATION

Output Voltage: See Ratings Chart.
Output Current: See Ratings Chart.
Output Wattage: Typ. 300W continuous.
Output Connector: Positronic 47-pin PCIH47M400A1.
Line Regulation: Typ. 0.01%.
Load Regulation: Typ. ± 0.2 to $\pm 1.0\%$.
Noise & Ripple: Typ. 1% Pk.-Pk. or 50mV, whichever is greater.
OVP: Built-in at all outputs.
Adjustability: Available at VO1, 2 & 3.
Remote Sensing: Available at VO1 & sVO2.
Hot-Swap: Available.
N+1 Redundancy: Installed with internal OR-ing diodes at all outputs for N+1 redundancy operation.
Current Sharing: Third-wire current sharing at VO1,2&3.
Over Current Protection (OCP): Installed in each rail.
Overload Protection (OLP): Fully protected against output overload or short circuit. Typical 120% max. load. Consult the factory for special OLP setting.

GENERAL SPECIFICATION

Efficiency: Typ. 83 %.
Switching Frequency: 130K Hz.
Circuit Topology: Forward circuit.
Transient Response: Peak deviation is 160mV and recovers within 0.256mS for 25% load-change.
Safety Standard: IEC 60950-1 Class I.
Construction: Eurocard 3U X 8HP X 160mm CompactPCI format.
Operating Temperature: 0 to +50 °C at full load with specified air flow.
 Derates linearly to 50% at +70°C.
Storage Temperature: -40 to +85 °C.
Temperature Coefficient: Typ. $\pm 0.02\%$ / °C.
Cooling: At least 700 LFM moving air is required to achieve full rating power 300W in a confined area.
Power Density: 7.7 Watts/ Cubic Inch.

NOTE: (1)All measurement are at nominal input, full load and +25°C unless otherwise specifications.
 (2)Due to requests in market and advances in technology, specifications subject to change without notification.



For the details of safety approval, please consult the factory.



Total Power International, Inc.

OUTPUT VOLTAGE / CURRENT RATINGS CHART

QUAD OUTPUT

MODEL NO.	MAIN +VO1 @★#≡⊙				AUX. +VO2 ▲@★#≡⊙				AUX. +VO3 ▲@★≡⊙					AUX. -VO4 ⊙▲★				
	Min.	Typ.	Volt.	Max.	Min.	Typ.	Volt.	Max.	Min.	Typ.	Volt.	Max	Pk.	Min.	Typ.	Volt.	Max.	Pk.
TPDC301P-48B-490(E)	2.0A	26.8A	+5V	40A	0A	20A	+3.3V	40A	0A	7.5A	+12V	10A	11A	0A	1A	-12V	1.5A	1.7A


Symbol: "★" OVP built-in. "@" Adjustable. "#" Remote sensing. "≡" 3rd wire Load Sharing. "⊙" Installed with Or-ing diode.
 "▲" Magnetic Amplifier.

Remark: Peak load less than 60sec. with duty cycle <10%.

Max. load is the continuous operating load of each rail. But the max. load of each rail can't be drawn from all outputs at the same time.
 Total output maximum 300 W; Total combined current of +5 V and + 3.3 V not large than 50 A

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 666.0 g (23.5 Oz.)

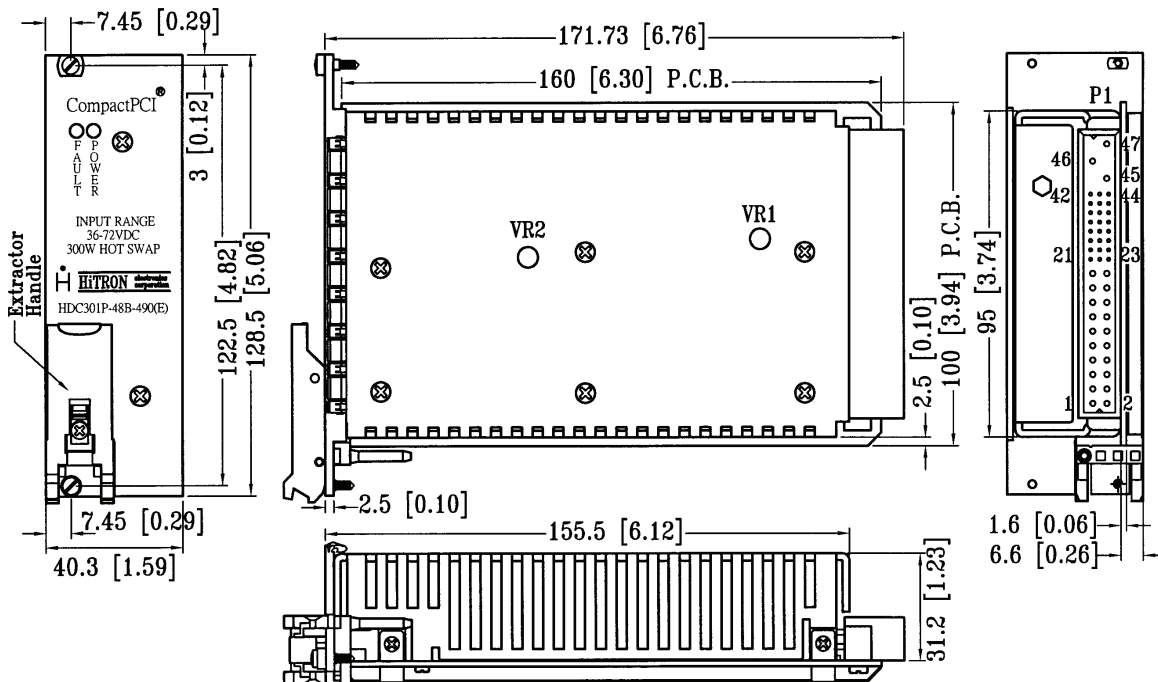

INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT

ASSIGNMENT	DC INPUT			QUAD OUTPUT													STATUS/CONTROL				
	-Vin	+Vin	G	VO1	S+	S-	Adj.	C.S.	VO2	S+	Adj.	C.S.	VO3	S+	C.S.	VO4	DC COM	EN#	DEG#	INH#	FAL#
CNTR & PIN #	47	46	45	1, 3, 4	30	34	29	35	13,14, 15,16, 17,18	33	32	41	20	36	44	21	5,6,7,8,9, 10,11,12, 19,24	27	38	39	42

Mating connector: PCIH47F400A1.