January 8, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

HIGH DENSITY, HIGH VOLTAGE, STANDARD RECOVERY RECTIFIER ASSEMBLY

- High reverse voltages
- Low reverse leakage current
- Low distributed and ground capacitance
- Corona free design
- Air or oil environments


QUICK REFERENCE DATA

- V_R = 100 - 200kV
- I_F = 100mA
- t_{rr} = 2.5µS
- I_R = 1.0µA

ABSOLUTE MAXIMUM RATINGS

	Symbol	SCKV100K3	SCKV150K3	SCKV200K3	Unit
Working reverse voltage	V_{RWM}	100	150	200	kV
Surge reverse voltage	V_{RSM}	110	165	220	kV
Average forward current	$I_{F(AV)}$				
in air @ 25°C		←	100	→	mA
in oil @ 55°C		←	300	→	mA
in forced air 600 CFM		←	200	→	mA
Non-repetitive surge current t_p = 8.3mS, @ 25°C	I_{FSM}	←	25	→	A
Storage temperature range	T_{STG}	←	-55 to +150	→	°C
Operating temperature range	T_{OP}	←	-55 to +150	→	°C
Body length Max.	dim B	4.53	6.66	8.78	inches

MECHANICAL

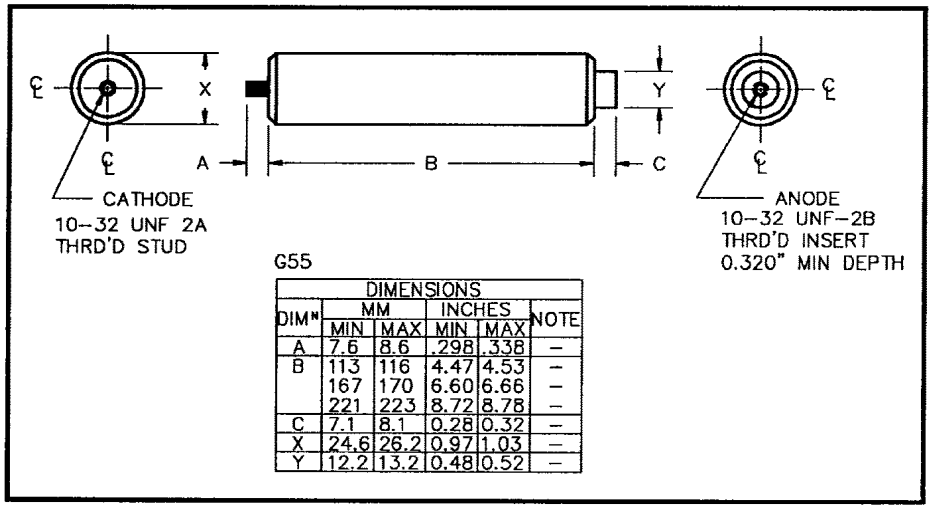

G55

DIMENSIONS					
DIM	MM		INCHES		NOTE
	MIN	MAX	MIN	MAX	
A	7.6	8.6	.298	.338	–
B	113	116	4.47	4.53	–
	167	170	6.60	6.66	–
	221	223	8.72	8.78	–
C	7.1	8.1	0.28	0.32	–
X	24.6	26.2	0.97	1.03	–
Y	12.2	13.2	0.48	0.52	–

© 1997 SEMTECH CORP.

January 8, 1998

ELECTRICAL CHARACTERISTICS

	Symbol	SCKV100K3	SCKV150K3	SCKV200K3	Unit
Max. forward voltage drop @ I_F = 100mA, T_j = 25°C	V_F	120	190	250	V
Max. reverse leakage current @ V_{RWM}, T_j = 25°C	I_R	←	1.0	→	µA
@ V_{RWM}, T_j = 100°C	I_R	←	20	→	µA
Max. reverse recovery time 50mA I_F to 100mA I_R. Recovers to 25mA I_{RR}.	t_{rr}	←	2.5	→	µS
Max. fusing current t_p = 8.3mS	I^2t	←	2.6	→	A^2S

1. Measured on discrete devices prior to assembly

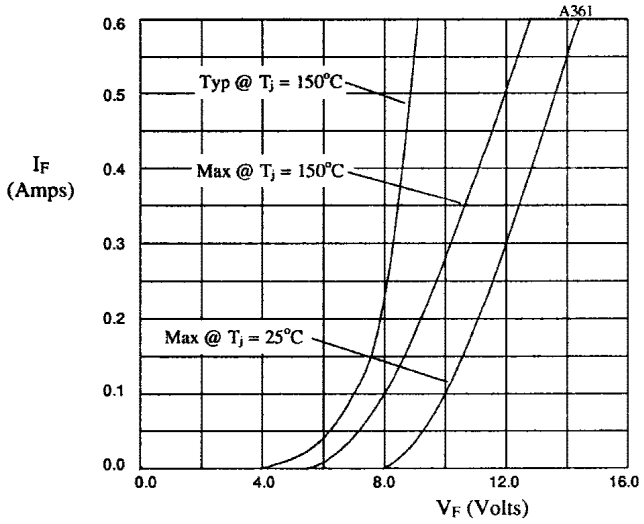


Fig 1. Forward voltage drop as a function of forward current for use with multiplication table.

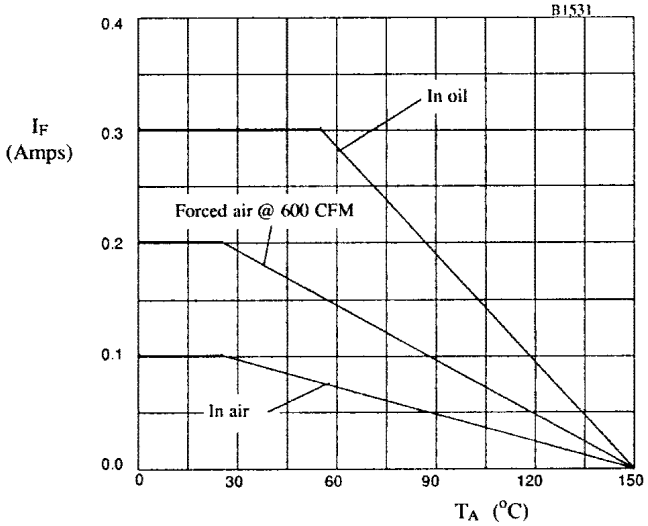


Fig 2. Maximum average forward current against ambient temperature.

Multiplication tables for fig 1.

SCKV100K3	X-axis x12
SCKV150K3	X-axis x19
SCKV200K3	X-axis x25

© 1997 SEMTECH CORP.