
600mA LOW DROPOUT LINEAR REGULATOR



SOT-25

■ DESCRIPTION

The UTC **LR9211** is a high speed LDO regulator that features high accurate, low noise, high ripple rejection, low dropout and low power consumption. Designed with a P-channel MOSFET series pass transistor, the UTC **LR9211** yields extremely low dropout voltage and maintains very low ground current (70μA).

The UTC **LR9211** does not require a bypass capacitor, hence achieving the smallest PCB area.

Other features include foldback overcurrent protection, quick soft start, and overtemperature protection. The UTC **LR9211** is available in fixed output voltage from 0.8V to 3.3V with 0.1V per step or as an adjustable device with a 0.8V reference voltage The device comes in various packages.

■ FEATURES

* Wide Input Voltage Range from 2.5V to 5.5V
* Ultra Low Dropout Voltage: 300mV @ V_{OUT} =3.3V, 300mA
* Ultra Fast Response in Line/Load Transient
* Stable with 1uF Ceramic Output Capacitor
* Low Ground Current: 70μA Typical
* Low Shutdown Current: <1μA
* Foldback Output Current Limit
* High Output Accuracy
  1.5% Initial Accuracy
  Fixed Output Voltages: 0.8V~3.3V
  Adjustable Output Voltage from 0.8V to 4.5V
* Over-Temperature Protection

■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
LR9211L-xx-AF5-R	LR9211G-xx-AF5-R	SOT-25	Tape Reel

Note: xx: Output Voltage, refer to Marking Information.


LR9211G-xx-AF5-R (1)Packing Type (2)Package Type (3)Output Voltage Code (4)Green Package	(1) R: Tape Reel (2) AF5: SOT-25 (3) xx: refer to Marking Information (4) G: Halogen Free and Lead Free, L: Lead Free

Copyright © 2018 Unisonic Technologies Co., Ltd

■ MARKING

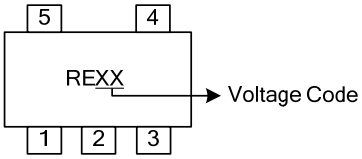PACKAGE	VOLTAGE CODE	MARKING
SOT-25	18: 1.8V AD: ADJ	


■ PIN CONFIGURATION



■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	V_{IN}	Input Voltage. This pin connects to the source of the internal pass transistor that supplies current to the output pin. Bypass VIN to GND with a minimum 1uF ceramic capacitor. Place the decoupling capacitor physically as close as possible to the device.
2	GND	Ground.
3	EN	Enable Input. Pulling this pin below 0.35V turns the regulator off, reducing the quiescent current to a fraction of its operating value. This pin is not available for 3-pin packages.
4	FB/NC	Feedback Pin(ADJ Version). this pin is connected to an external resistor divider, turns to adjustable output voltage; V_{OUT}=0.8*(R1+R2)/R1(V); NC Pin(fixed version);
5	V_{OUT}	Output Voltage. This pin is power output of the device. A pull low resistance exists when the device is disabled by pulling low the EN pin. To maintain adequate transient response to large load change, a minimum 1uF ceramic capacitor is required to reduce the effects of current transients on VOUT.

■ BLOCK DIAGRAM

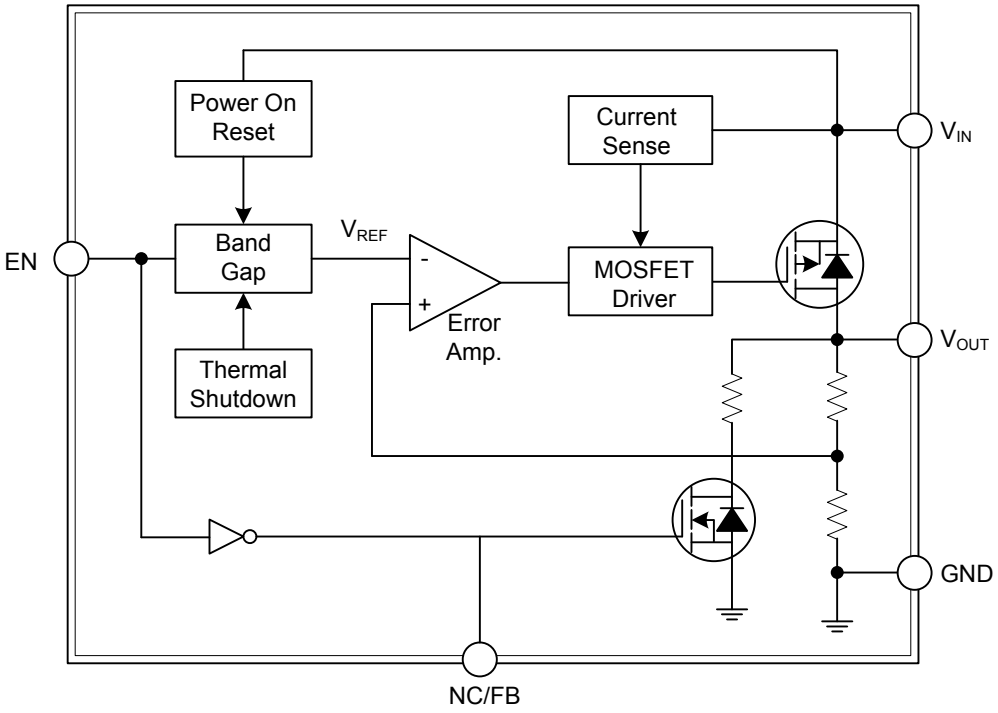

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Input Voltage (Note 1)	V_{IN}	-0.3 ~ +6	V
Other Pins		-0.3 ~ (V_{IN}+0.3)	V
Power Dissipation (T_A=25°C)	P_D	0.4	W
Junction Temperature	T_J	+150	°C
Storage Temperature Range	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Package Thermal Resistance	θ_{JA}	250	°C/W


■ RECOMMENDED OPERATION CONDITIONS


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Input Voltage	V_{IN}	2.5 ~ +5.5	V
Operating Ambient Temperature Range	T_A	-20 ~ +85	°C
Operating Junction Temperature Range	T_J	-20 ~ +125	°C

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Input Voltage						
Supply Input Voltage	V_{IN}		2.5		5.5	V
Quiescent Current	I_Q	V_{EN}=5V, I_{OUT}=0mA	40	70	115	μA
Shutdown Current	I_{SHDN}	V_{EN}=0V		0.1	1	μA
Output Voltage						
Output Voltage Accuracy	V_{OUT}	V_{IN}=V_{NOM}+1.0V, I_{OUT}=1mA, fixed output voltage version	-1.5		1.5	%V_{NOM}
Reference Voltage Accuracy	V_{FB}	V_{IN}=3.3V, I_{OUT}=1mA, Vout=FB ADJ output voltage version	0.788	0.80	0.812	V
Output Line Regulation	$\Delta V_{REF\ (LINE)}$	2.5V<V_{IN}<5.5V, and V_{IN}>V_{OUT}+1.0V, I_{OUT}=1mA		0.01	0.2	%/V
Output Load Regulation	$\Delta V_{REF\ (LOAD)}$	1mA<I_{OUT}<500mA, V_{IN}=V_{NOM}+1.0V		0.5	2.0	%/A
Dropout Voltage	V_{DROP}	I_{OUT}=300mA, V_{OUT} =1.8V		450	600	mV
		I_{OUT}=300mA, V_{OUT} =3.3V		300	400	
		I_{OUT}=600mA, V_{OUT} =1.8V			1200	
		I_{OUT}=600mA, V_{OUT} =3.3V			800	
Power Supply Rejection Ratio	PSRR	Frequency=10Hz, I_{OUT}=10mA		68		dB
		Frequency=1kHz, I_{OUT}=10mA		65		
		Frequency=100kHz, I_{OUT}=10mA		45		
		Frequency=10Hz, I_{OUT}=300mA		48		
		Frequency=1kHz, I_{OUT}=300mA		62		
		Frequency=100kHz, I_{OUT}=300mA		40		
Enable						
Enable High Level	V_{EN}		1.2			V
Disable Low Level	V_{SD}				0.35	V
EN Input Current	I_{EN}	V_{IN}=5.5V, V_{EN}=5.5V or 0V	-1		1	μA
Enable Delay Time	T_{DELAY}	from V_{EN}>1.2V to V_{OUT}>10%V_{NOM}, by design		35		us
Output Ramp Up Time	T_{SS}	from V_{OUT}=10% to 90% of V_{NOM}, by design		45		us
Protection						
Current Limit Threshold	I_{LIM}		0.9	1.2		A
Short Circuit Current			0.6			A
Thermal Shutdown Temperature	T_{SD}	I_{OUT}=0mA, V_{IN}=V_{EN}=5.5V		170		°C
Thermal Shutdown Hysteresis	T_{SDHYS}	I_{OUT}=0mA, V_{IN}=V_{EN}=5.5V		10		°C

■ TYPICAL APPLICATION CIRCUIT

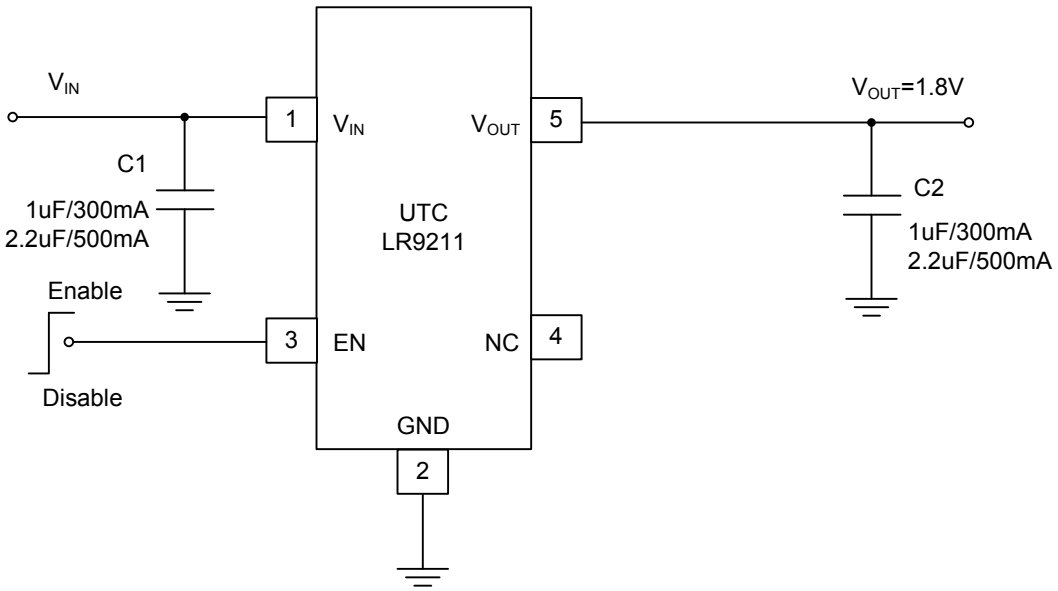

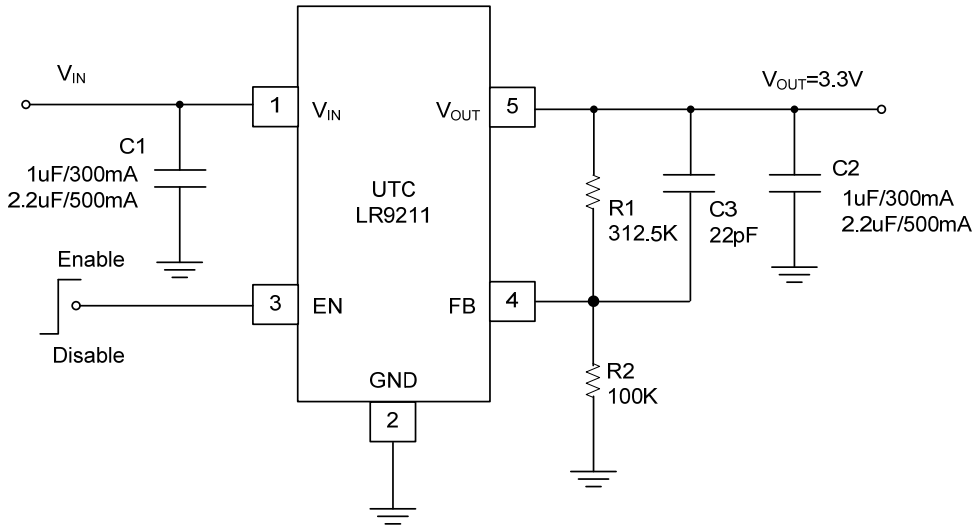

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.