



SHEET OF

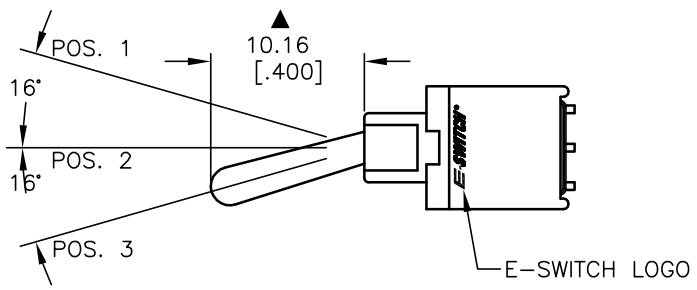


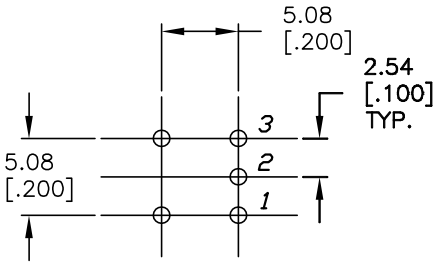


P.C.B. MOUNTING HOLES

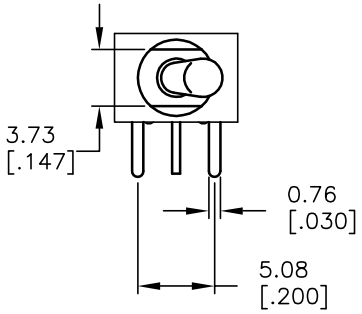

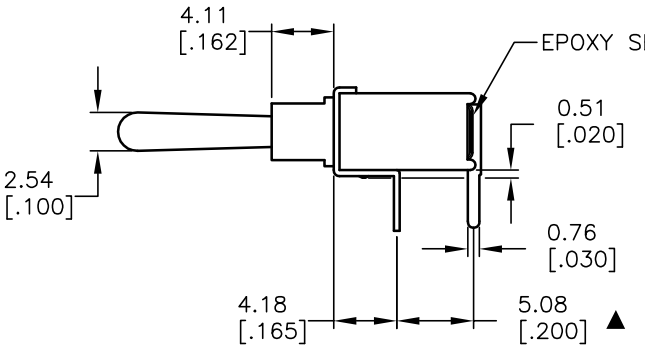

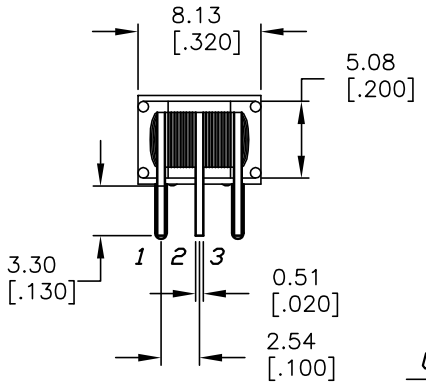



CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. ▲ RATING: 3 AMPS @120VAC OR 28 VDC
   1 AMPS @250VAC
5. FIXED TERM. & MOVING CONTACT: SILVER PLATED COPPER ALLOY
6. ELECTRICAL LIFE: 50,000 MAKE–AND–BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1000M OHM MIN.
8. DIELECTRIC STRENGTH: 1000V RMS MIN. @SEA LEVEL.
9. OPERATING TEMP.: –30°C to 85°C
10. ▲DENOTES CRITICAL PARAMETER

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3	OPEN	2-1

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13871	RELEASED FOR PRODUCTION	3/25/04	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 200AWMSP1T1A1M6QE

SCALE	DATE	DR	DWG	REV
2:1	3/25/04	AR	T201115	A