

## SMA Male to SMA Male Precision Cable 60 Inch Length Using 150 Series Coax, RoHS

### TECHNICAL DATA SHEET

PE34286-60

#### SMA Male to SMA Male Precision Cable 60 Inch Length Using 150 Series Coax, RoHS

##### Configuration

Connector 1	SMA Male
Connector 2	SMA Male
Cable Type	150 Series

##### Electrical Specifications

Frequency Range, GHz	DC to 26.5
Impedance, Ohms	50
Maximum VSWR	1.4:1
Velocity of Propagation, %	69.5
RF Shielding, dB	90
Maximum Operating Voltage, Vrms	1,900

##### Typical Electrical Specifications

###### Frequency 1

Frequency, GHz	2
VSWR	1.05:1
Insertion Loss	0.17 dB/ft [ 0.56 dB/m ]

###### Frequency 2

Frequency, GHz	6
VSWR	1.13:1
Insertion Loss	0.3 dB/ft [ 0.98 dB/m ]

###### Frequency 3

Frequency, GHz	10
VSWR	1.11:1
Insertion Loss	0.4 dB/ft [ 1.31 dB/m ]

###### Frequency 4

Frequency, GHz	14
VSWR	1.12:1
Insertion Loss	0.55 dB/ft [ 1.8 dB/m ]

###### Frequency 5

Frequency, GHz	16
VSWR	1.19:1
Insertion Loss	0.6 dB/ft [ 1.97 dB/m ]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Precision Cable 60 Inch Length Using 150 Series Coax, RoHS PE34286-60](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

## SMA Male to SMA Male Precision Cable 60 Inch Length Using 150 Series Coax, RoHS

### TECHNICAL DATA SHEET

PE34286-60

#### Frequency 6

Frequency, GHz	18
VSWR	1.18:1
Insertion Loss	0.68 dB/ft [ 2.23 dB/m ]

#### Frequency 7

Frequency, GHz	24
VSWR	1.22:1
Insertion Loss	0.85 dB/ft [ 2.79 dB/m ]

#### Frequency 8

Frequency, GHz	26.5
VSWR	1.24:1
Insertion Loss	0.9 dB/ft [ 2.95 dB/m ]

#### Electrical Specification Notes:

Short lengths up to 24" long may exhibit VSWR measurements up to 9% higher.

### Mechanical Specifications

#### Cable Assembly

Cable Type	150 Series
------------	------------

#### Temperature

Temperature Operating Range, deg C	-50 to +205
------------------------------------	-------------

#### Size

Length, in [cm]	60 [152.4]
One Time Minimum Bend Radius, in [mm]	1 [25.4]

#### Cable

Center Conductor Type	Solid
Cable Inner Conductor	Copper Clad Steel, Silver
No of Shields	1
Dielectric Type	PTFE
Jacket Material	FEP
Jacket Diameter, in [mm]	0.15 [3.81]

#### Connector 1

Type	SMA Male
Configuration	Straight
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Coupling Nut Material and Plating	Passivated Stainless Steel
Hex Size, in.	5/16
Torque, in-lbs [Nm]	8 [0.9]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Precision Cable 60 Inch Length Using 150 Series Coax, RoHS PE34286-60](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

## SMA Male to SMA Male Precision Cable 60 Inch Length Using 150 Series Coax, RoHS

### TECHNICAL DATA SHEET

PE34286-60

Body Material and Plating  
Dielectric Type

Passivated Stainless Steel  
PTFE

#### Connector 2

Type  
Configuration  
Inner Conductor Material and Plating  
Coupling Nut Material and Plating  
Hex Size, in.  
Torque, in-lbs [Nm]  
Body Material and Plating  
Dielectric Type

SMA Male  
Straight  
Copper Clad Steel, Silver  
Passivated Stainless Steel  
5/16  
8 [0.9]  
Passivated Stainless Steel  
PTFE

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

Yes

#### Plotted and Other Data

Notes:

Values at 25 °C, sea level

SMA Male to SMA Male Precision Cable 60 Inch Length Using 150 Series Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Precision Cable 60 Inch Length Using 150 Series Coax, RoHS PE34286-60](http://www.pasternack.com/sma-male-sma-male-150-series-cable-assembly-pe34286-60-p.aspx)

URL: <http://www.pasternack.com/sma-male-sma-male-150-series-cable-assembly-pe34286-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE34286-60 CAD Drawing

SMA Male to SMA Male Precision Cable 60 Inch Length Using 150 Series Coax, RoHS

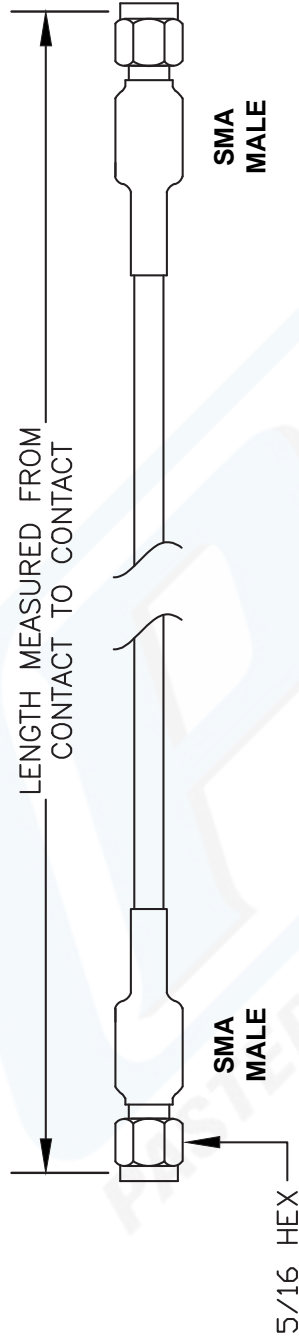

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
<b>Part Number Configuration</b> PE3 <input type="text" value="zzz"/> <input type="text" value="yy"/> - <input type="text" value="xx"/> <input type="text" value="uu"/> 00 - 99999 LF = RoHS Compliant < Blank > = Standard Note: LF applies only to RF cables	<b>Examples</b> PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM	-12	12"	-25CM	25Cm
		-24	24"	-50CM	50Cm
		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
-XX	Custom Length	-xxCM	Custom Length		

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].  
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE  
**PE34286**

**PASTERNAK**  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919	CAD FILE 030308	SCALE N/A	SIZE A	2233
----------------	-----------------	-----------	--------	------