


Spiral Wrap



Features

- Designed to Hold and Protect Cables, Harnesses, and Hoses
- Allows Flexibility while Providing Secure Bundling
- Quick and Easy to Install due to Flexible Polyethylene Construction
- Heavy Duty Wall Thickness Provides Greater Resistance to Abrasions and Vibrations
- Breakout at Any Point
- .0625" to 7" Expanded Bundle Range
- Natural and UV Black Polyethylene
- RoHS Compliant
- Operating Temperature Rating: -60° to +88°C (-76° to +190°F)

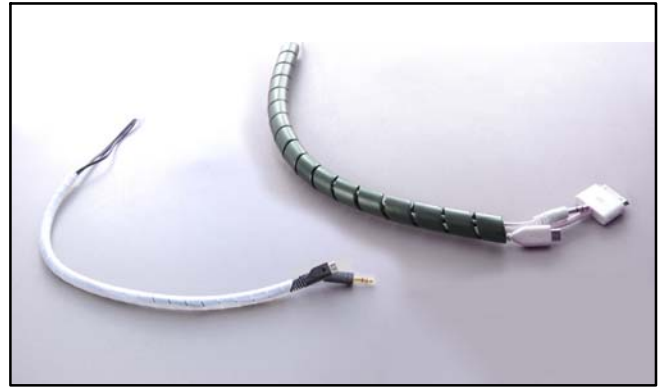

Spiral Wrap

| NTE Type No. | Color & Material | Feet per Roll | Outer Diameter (in. / mm) | Inner Diameter (in. / mm) | Wall Thickness (in. / mm) | Pitch (in. / mm) | Bundle Range (inches) |
|--------------|-----------------------|---------------|---------------------------|---------------------------|---------------------------|------------------|------------------------|
| 04-SWP1259C | Natural Polyethylene | 100 | .125 (3.17) | .061 (1.54) | .032 (.812) | .187 (4.74) | .0625 - .500 |
| 04-SWP1250C | UV Black Polyethylene | 100 | .125 (3.17) | .061 (1.54) | .032 (.812) | .187 (4.74) | .0625 - .500 |
| 04-SWP1879C | Natural Polyethylene | 100 | .187 (4.74) | .127 (3.22) | .030 (.762) | .250 (6.35) | .125 - 1.500 |
| 04-SWP1870C | UV Black Polyethylene | 100 | .187 (4.74) | .127 (3.22) | .030 (.762) | .250 (6.35) | .125 - 1.500 |
| 04-SWP2509C | Natural Polyethylene | 100 | .250 (6.35) | .160 (4.06) | .045 (1.14) | .375 (9.52) | .1875 - 2.000 |
| 04-SWP2500C | UV Black Polyethylene | 100 | .250 (6.35) | .160 (4.06) | .045 (1.14) | .375 (9.52) | .1875 - 2.000 |
| 04-SWP3759C | Natural Polyethylene | 100 | .375 (9.52) | .271 (6.88) | .052 (1.32) | .438 (11.12) | .3125 - 3.000 |
| 04-SWP3750C | UV Black Polyethylene | 100 | .375 (9.52) | .271 (6.88) | .052 (1.32) | .438 (11.12) | .3125 - 3.000 |
| 04-SWP5009C | Natural Polyethylene | 100 | .500 (12.70) | .375 (9.52) | .062 (1.57) | .563 (14.30) | .375 - 4.000 |
| 04-SWP5000C | UV Black Polyethylene | 100 | .500 (12.70) | .375 (9.52) | .062 (1.57) | .500 (12.70) | .375 - 4.000 |
| 04-SWP6259C | Natural Polyethylene | 100 | .625 (15.87) | .500 (12.70) | .062 (1.57) | .652 (15.87) | .500 - 4.500 |
| 04-SWP6250C | UV Black Polyethylene | 100 | .625 (15.87) | .500 (12.70) | .062 (1.57) | .652 (15.87) | .500 - 4.500 |
| 04-SWP7509C | Natural Polyethylene | 100 | .750 (19.05) | .620 (15.74) | .065 (1.65) | .750 (19.05) | .750 - 5.000 |
| 04-SWP7500C | UV Black Polyethylene | 100 | .750 (19.05) | .620 (15.74) | .065 (1.65) | .750 (19.05) | .750 - 5.000 |
| 04-SWP10009C | Natural Polyethylene | 100 | 1.000 (25.40) | .840 (21.33) | .080 (2.03) | 1.000 (25.40) | 1.000 - 7.000 |
| 04-SWP10000C | UV Black Polyethylene | 100 | 1.000 (25.40) | .840 (21.33) | .080 (2.03) | 1.000 (25.40) | 1.000 - 7.000 |

Note 1. Tolerance: .xxx = ±.005 (±.127mm); .xx = ±.015 (±.381mm)