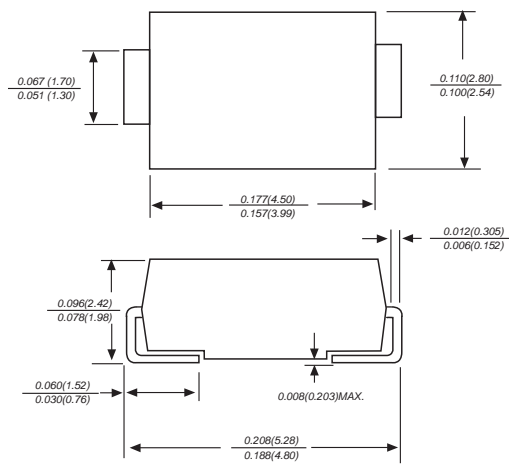


# SS32 THRU SS3200

|   |   |
|---|---|
| <p style="text-align: center;"><b>SMA</b></p>  <p style="text-align: center; font-size: small;">Dimensions in inches and (millimeters)</p>   | <p style="text-align: center;"><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0</li> <li>◆ For surface mounted applications</li> <li>◆ Low reverse leakage</li> <li>◆ Built-in strain relief, ideal for automated placement</li> <li>◆ High forward surge current capability</li> <li>◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals</li> </ul> |
| <p style="text-align: center;"><b>MECHANICAL DATA</b></p> <p><b>Case:</b> JEDEC DO-214AC molded plastic body<br/> <b>Terminals:</b> leads solderable per MIL-STD-750, Method 2026<br/> <b>Polarity:</b> Color band denotes cathode end<br/> <b>Mounting Position:</b> Any<br/> <b>Weight:</b> 0.002 ounce, 0.07 grams</p> |   |

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| Catalog Number  | SYMBOLS         | SS32        | SS33 | SS34 | SS35 | SS36 | SS38        | SS310 | SS3150 | SS3200 | UNITS |
|---|-----------------|-------------|------|------|------|------|-------------|-------|--------|--------|-------|
| Maximum repetitive peak reverse voltage   | $V_{RRM}$       | 20          | 30   | 40   | 50   | 60   | 80          | 100   | 150    | 200    | VOLTS |
| Maximum RMS voltage   | $V_{RMS}$       | 14          | 21   | 28   | 35   | 42   | 56          | 70    | 105    | 150    | VOLTS |
| Maximum DC blocking voltage   | $V_{DC}$        | 20          | 30   | 40   | 50   | 60   | 80          | 100   | 150    | 200    | VOLTS |
| Maximum average forward rectified current at $T_L$ (see fig.1)                                      | $I_{AV}$        | 3.0         |      |      |      |      |             |       |        |        | Amps  |
| Peak forward surge current<br>8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | $I_{FSM}$       | 100.0       |      |      |      |      |             |       |        |        | Amps  |
| Maximum instantaneous forward voltage at 3.0A   | $V_F$           | 0.55        |      | 0.70 |      | 0.85 |             | 0.95  |        | Volts  |       |
| Maximum DC reverse current<br>at rated DC blocking voltage  | $I_R$           | 0.5         |      |      |      |      |             | 0.2   |        | mA     |       |
| $T_A=25^\circ\text{C}$<br>$T_A=100^\circ\text{C}$   |                 | 20          |      |      | 10   |      | 2.0         |       |        |        |       |
| Typical junction capacitance (NOTE 1)   | $C_J$           | 500         |      |      | 300  |      |             | pF    |        |        |       |
| Typical thermal resistance (NOTE 2)   | $R_{\theta JA}$ | 55.0        |      |      |      |      |             |       |        |        | °C/W  |
| Operating junction temperature range  | $T_J$           | -65 to +125 |      |      |      |      | -65 to +150 |       |        |        | °C    |
| Storage temperature range   | $T_{STG}$       | -65 to +150 |      |      |      |      |             |       |        |        | °C    |

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

# SS32 THRU SS3200

## RATINGS AND CHARACTERISTIC CURVES SS32 THRU SS3200

