

3S4A_1UP series

3W Single Output - Fixed Input - Isolated & Unregulated
SIP PACKAGE



- ⊕ Small Footprint
- ⊕ Ultra compact SIP package
- ⊕ Power density: 1.53W/cm³
- ⊕ Temperature range: -40°C ~ +85°C
- ⊕ Efficiency up to 81%

- ⊕ No external component required
- ⊕ 1kVDC isolation
- ⊕ Internal SMD construction
- ⊕ Industry standard pinout
- ⊕ RoHS compliance
- ⊕ Continuous short voltage protection (SCP)



DC-DC Converter

3 Watt

The 3S4A_1UP series contains miniature, isolated 3W DC-DC converters in a SIP package. They offer the ideal solution in many space critical applications for board level power distribution.

The internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency, lower output ripple noise and 1kVDC isolation.

Common specifications

Short circuit protection*:	Continuous, auto-recovery
Casing temperature rise at full load:	5V output: 41°C MAX Other output: 32°C MAX
Cooling:	Free air convection
Operation temperature range:	-40°C – +85°C
Storage temperature range:	-55°C – +150°C
Lead temperature:	300°C (1.5mm from case for 10 sec.)
Storage humidity range:	< 95%
Case material:	Black flame-retardant heat-proof plastic [UL94-V0]
Potting material:	Epoxy [UL94-V0]
MTBF:	>3,500,000 hours
Weight:	1.3g

* Supply voltage must be discontinued at the end of short circuit duration.

Isolation specifications

Item	Test condition	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute	1000			VDC
Isolation resistance	Input-output, isolation voltage 500VDC	1000			MΩ

EMC specifications

EMI	CE	CISPR22/EN55022	CLASS B	(see EMC solution-recommended circuit)	
EMI	RE	CISPR22/EN55022	CLASS B	(see EMC solution-recommended circuit)	
EMI	ESD	IEC 61000-4-2	Contact	±6KV	perf. Criteria B

Example:

3S4A_0505S1UP

3 = 3Watt; S4 = SIP4; A = Pinning; 5Vin; 5Vout; S = Single Output;
1 = 1kVDC; U = Unregulated Output; P = Short circuit protection (SCP)

Output specifications

Item	Test condition	Min	Typ	Max	Units
Output voltage accuracy	See tolerance envelope				
Line regulation	For Vin change of ±1%	1	1.2		%
Load regulation (10%-100% load)	• 5VDC output • 9VDC output • 12VDC output • 15VDC output • 24VDC output	14 9 7.5 7 5.5	15 10 9.5 8.5 7.5		%
Temperature drift	100% full load			±0.03	%/°C
Ripple&Noise*	20MHz Bandwidth		100		mVp-p
Switching frequency	• 5V input • 12V input	70 145		110	KHz

*Ripple and noise are measured by "parallel cable" method.

Input specifications

Item	Test condition	Min	Typ	Max	Units
Voltage range	• 5V input • 12V input	4.5 10.8	5 12	5.5 13.2	V
Reflected ripple current			26	48	mA
Surge voltage	• 5V input • 12V input	-0.7 -0.7		9 18	VDC
Input filter	Capacitor				
Hot plug	Unavailable				

Note:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. The maximum capacitive load offered were tested at nominal input voltage and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta = 25°C, humidity <75% with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on our Company's corporate standards;
5. The performance parameters of the product models listed in this manual are as above, but some parameters of non-standard model products may exceed the requirements mentioned above. Please contact our technicians directly for specific information;
6. We can provide product customization service;
7. Specifications are subject to change without prior notice.


3S4A_1UP series

3W Single Output - Fixed Input - Isolated & Unregulated
SIP PACKAGE


Part Number	Input Voltage [V]	Output Voltage [VDC]	Current [mA, max]	Efficiency [%, typ]	Capacitor load [μ F]
3S4A_0505S1UP	5	5	600	77	220
3S4A_0509S1UP	5	9	333	80	220
3S4A_0512S1UP	5	12	250	82	220
3S4A_0515S1UP	5	15	200	80	220
3S4A_0524S1UP	5	24	125	79	220
3S4A_1205S1UP	12	5	600	80	220
3S4A_1209S1UP	12	9	333	83	220
3S4A_1212S1UP	12	12	250	86	220
3S4A_1215S1UP	12	15	200	84	220
3S4A_1218S1UP	12	18	166	74	220

Typical characteristics

Temperature derating graph

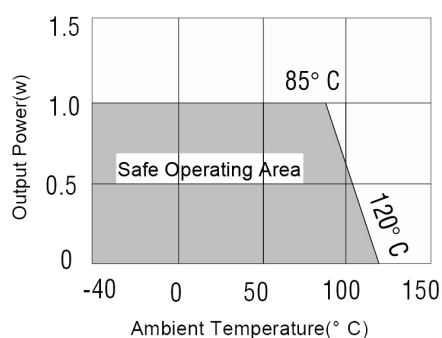


Tolerance envelopes graph

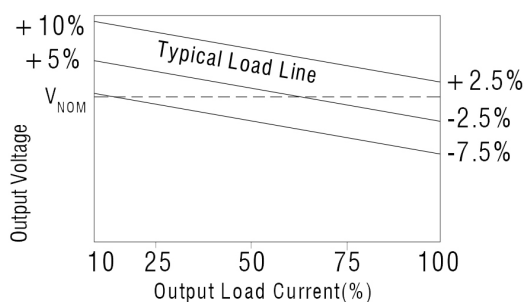


Recommended footprint

4Pin SIP Package

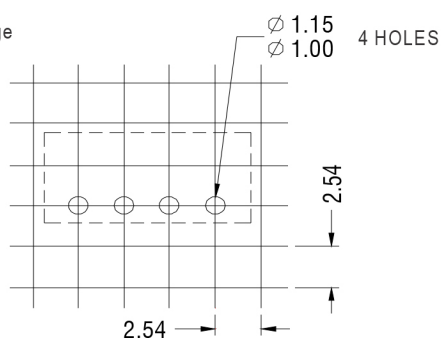

Tube outline

4Pin SIP Tube

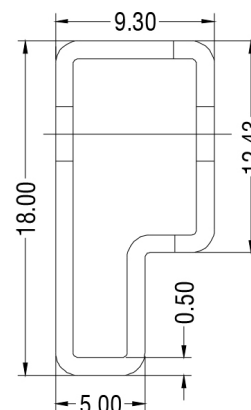

Note:

Unit: mm
General tolerance: ± 0.5 mm
Tube length: 520mm; ± 2 mm
Tube quantity: 35pcs


3S4A_1UP series

3W Single Output - Fixed Input - Isolated & Unregulated
SIP PACKAGE

Mechanical Dimensions

Pin connections

Pin	Function
1	-Vin
2	+Vin
3	-Vout
4	+Vout

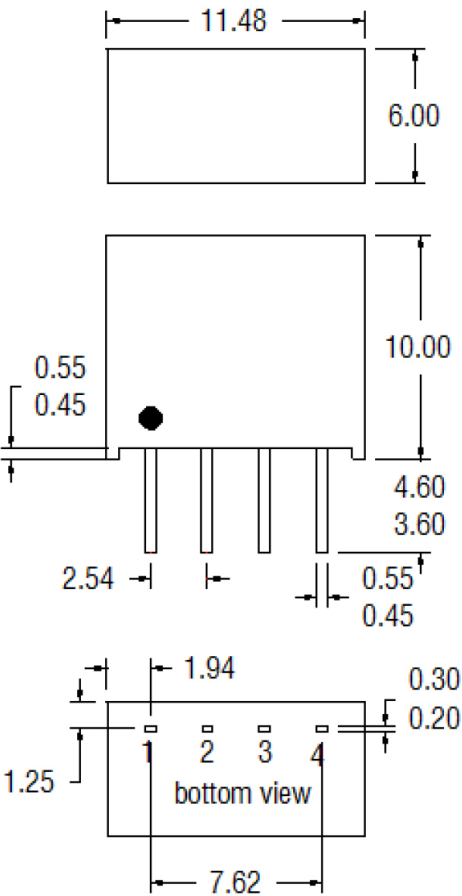

Note:
Unit: mm
All pins on a 2.54mm pitch
Pin diameter: ± 0.25 mm
Case tolerances: ± 0.25 mm