Product Features

- Small size (4 x 4 mm)
- High gain
- High linearity
- Low cost
- Low Noise Figure
- 30dB AGC Range
- Pb-free/RoHS compliant

Applications

- FTTH (G-PON, GE-PON)
- Optical node
- RFoG

Package Type : QFN4X4

Description

ACQ624 is designed as low cost Trans-impedance amplifiers for many applications including FTTH, RFoG, Optical, Triplexers. This MMIC is based on Gallium Arsenide Enhancement Mode pHEMT which shows low current draw and very low noise. The data in this spec sheet is valid only for 75ohm RF Video output application.

Electrical Specifications

PARAMETER		UNIT	MIN	TYP	MAX	CONDITION
Frequency		MHz	50	-	870	-
Gain		dB	-	34.5	-	ACQ624 + AGC Insertion Loss 3dB AGC Vctr = 5.0V
Gain Flatness		dB	-	1	-	
Input Return Loss		dB	-	-13	-10	
Output Return Loss		dB	-	-12	-8	
Output IP3		dBm	31	36	-	
1dB Compression Point		dBm	20	23	-	
Noise Figure		dB	-	2.0	4	
AGC Range π Pin Diode (SMP1307-027)		dB	-	30	-	Vctr = 0V ~ 5V
CSO	50 ~ 550MHz	dBc	-	-60	-55	79 channel FLAT +35dBmV/ch
CTB		dBc	-	-60	-55	
XMOD		dBc	-	-55	-50	
CSO	50 ~ 550MHz	dBc	-	-70	-65	79 channel FLAT +25dBmV/ch
CTB		dBc	-	-75	-70	
XMOD		dBc	-	-75	-70	
ACQ624 DC Current		mA	-	280	-	VDD = +5.0V
AGC DC Current		mA	-	30	-	AGC Vctr = 5.0V

Note

1. Test conditions unless otherwise noted. Test Freq = 500MHz, T=25℃, VDD=5V, 75Ω system
2. OIP3 measured with 2 tones at an output power of +5dBm/tone separated by 1MHz

Absolute Maximum Ratings

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
Device Voltage	VDC	-	5	7	-
Operating Temperature	℃	-40	-	85	-
Storage Temperature	℃	-40	-	150	-
ESD Human Body Model	-	-	Class 1A	-	-
Moisture sensitivity Level	-	-	MSL1	-	-
Junction temperature	℃	-	-	180	-
Thermal Resistance (Rth)	℃/W	-	25	-	-

Application Circuit @ 50 ~ 870MHz, 75ohm System

*** Bias of the same color can be configured as the Common Bias**

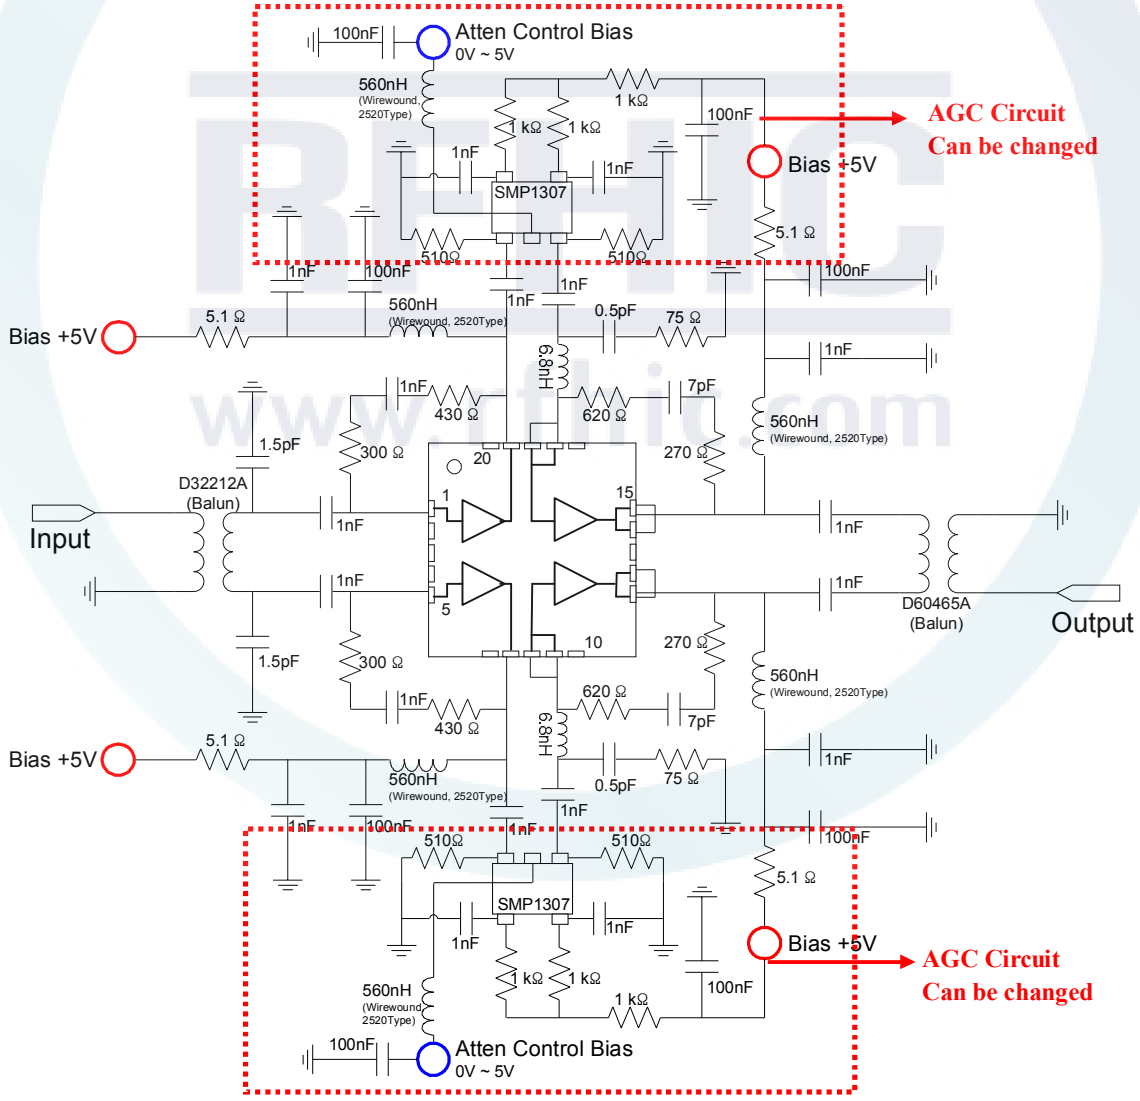

Typical Performance @ Vdd=5V, Ids=280mA, T=25℃, 75ohm System, AGC Range: Vcontrol = 0 ~ 5V, 12V

Gain vs. Frequency

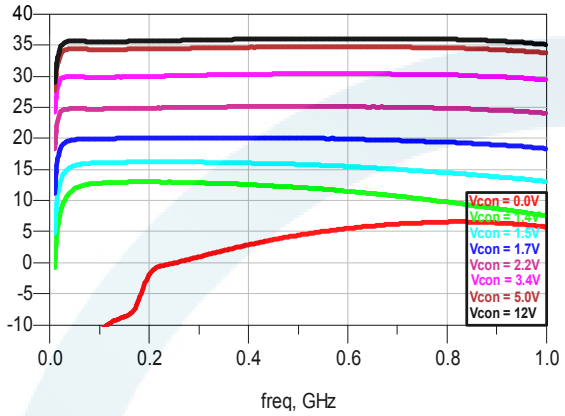

Noise Figure vs. Frequency

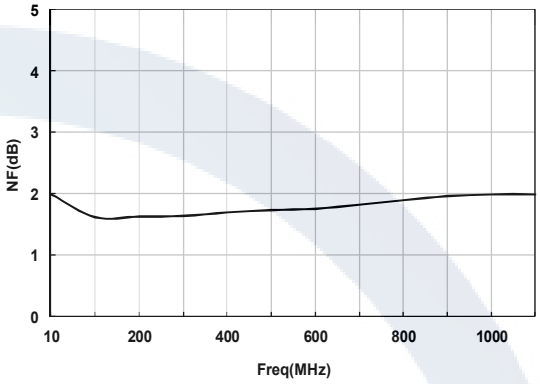

Input Return Loss vs. Frequency

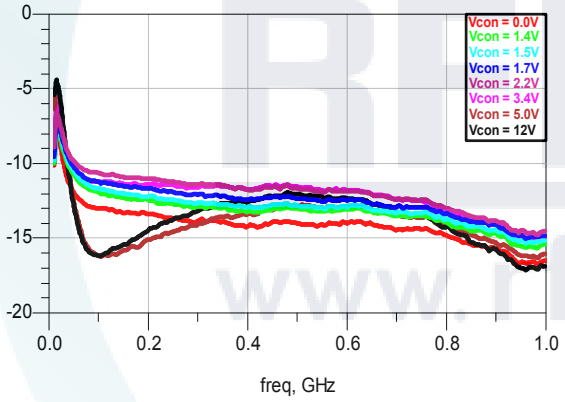

Output Return Loss vs. Frequency

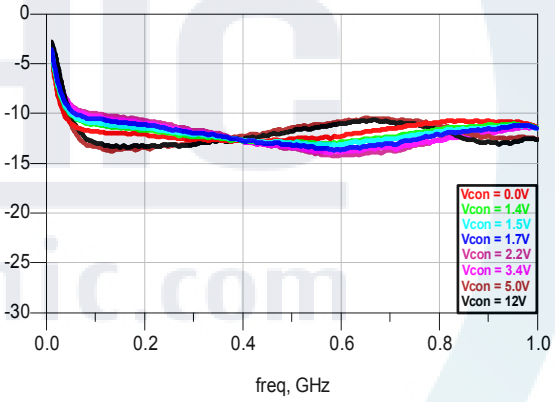

Multi-Tone Test: 79CH_FLAT @ Output +35dBmV/ch, Vctr = 5V

Level: +35dBmV	Tilt: 79CH_FLAT									
FRQ	**XMD (NCTA)**	**CTB RAW**	**CTB COR**	**N-FLR**	**CSU RAW**	**CSU COR**	**CSU FRQ**	**CSL RAW**	**CSL COR**	**CSL FRQ**
55.25	59.4	67.9	68.3	78.3	75.3	78.4	55.99	61.8	61.8	53.99
211.25	59.3	64.4	64.6	78.6	76.9	81.2	212.49	67.8	68.1	209.99
331.25	58.1	63.5	63.6	78.3	72.6	74	332.5	67.9	68.3	329.99
445.25	57	62.5	62.7	78.6	68.7	69.2	446.49	72.2	73.3	444.17
547.25	56.1	63.5	63.7	77.9	68.1	68.6	548.49	74.1	77.2	546.49
Min	56.1	62.5	62.7	77.9	68.1	68.6	55.99	61.8	61.8	53.99
Max	59.4	67.9	68.3	78.6	76.9	81.2	548.49	74.1	77.2	546.49

Temperature Test @ -40℃ ~ +85℃, 50ohm System, Nothing AGC Circuit

Temperature Cycle

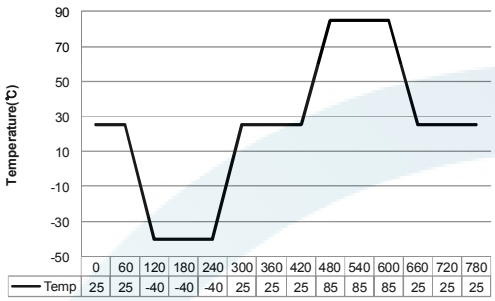

	0	60	120	180	240	300	360	420	480	540	600	660	720	780
Temp	25	25	-40	-40	-40	25	25	25	85	85	85	25	25	25

Temperature Range: Current

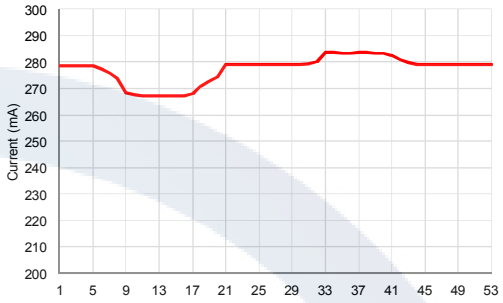

Temperature Range: Gain

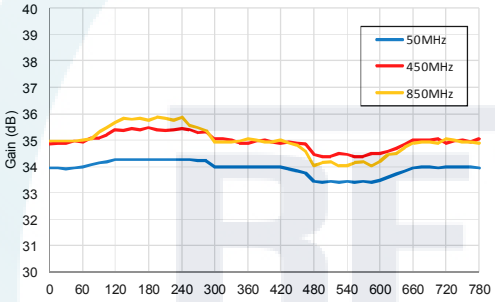

Temperature Range: Noise Figure

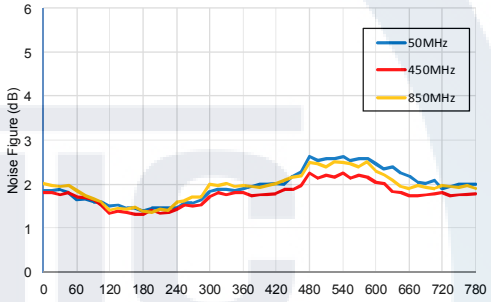

Temperature Range: Input Return Loss

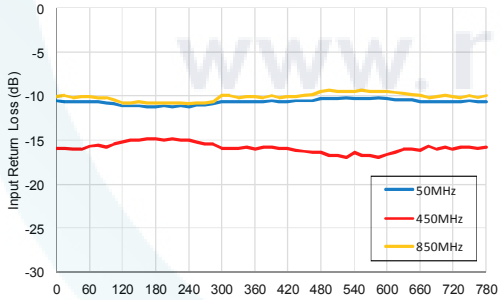

Temperature Range: Output Return Loss

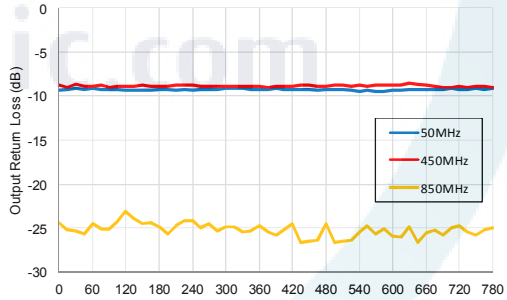

Temperature Range: OIP3

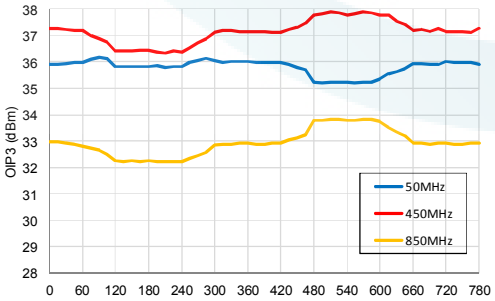

Temperature Range: P1dB

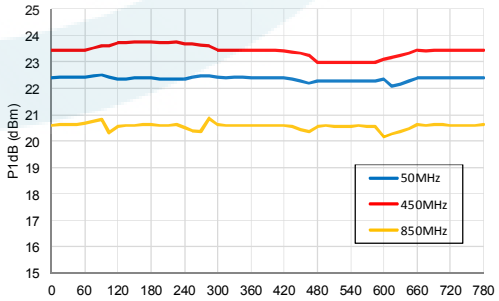

Package Dimension (Type: QFN4x4)

* Unit: mm[inch] | Tolerance ±0.2[.008]

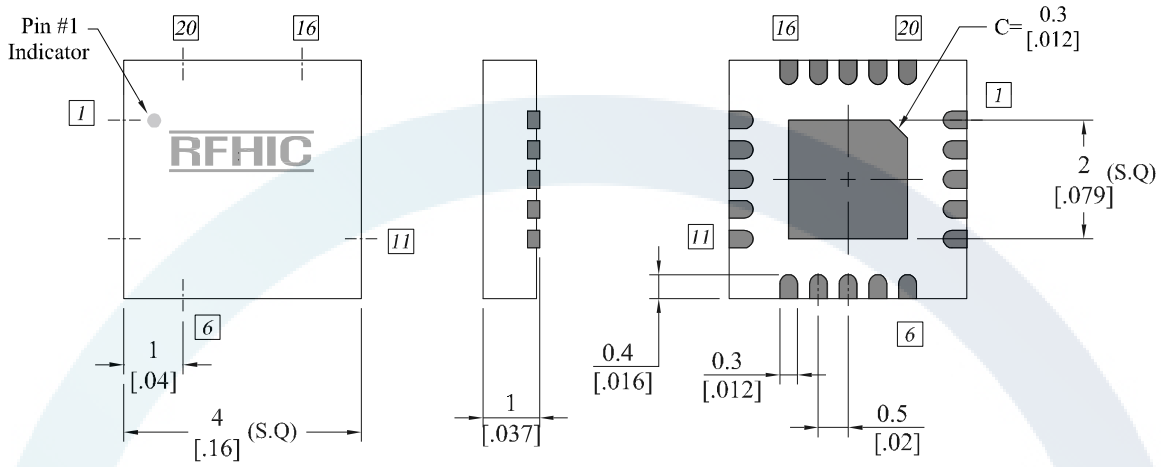

▲ Top View ▲ Side View ▲ Bottom View

Pin Description							
Pin No	**Function**	**Pin No**	**Function**	**Pin No**	**Function**	**Pin No**	**Function**
1	AMP1_IN	6	N/C	11	AMP4_OUT	16	N/C
2	N/C	7	AMP2_OUT	12	AMP4_OUT	17	AMP3_IN
3	N/C	8	AMP4_IN	13	N/C	18	AMP3_IN
4	N/C	9	AMP4_IN	14	AMP3_OUT	19	AMP1_OUT
5	AMP2_IN	10	N/C	15	AMP3_OUT	20	N/C

*N/C: Not Connected

*** Mounting Configuration Notes**

1. Ground / thermal via holes are critical for the proper performance of this device.
2. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
3. Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via hole region contacts the heatsink.
4. Do not put solder mask on the backside of the PCB in the region where the board contacts the heatsink.
5. RF trace width depends upon the PCB material and construction.
6. Use 1 oz. Copper minimum.

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
ACQ624	2014.04.22	1.1	Absolute Maximum Ratings (Delete Tj Typ)	-
ACQ624	2012.11.30	1.0	Newly created & New datasheet format.	-

RFHIC
www.rfhic.com

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages.
RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-8069-3036.