DATASHEET

EAFL2016W20A0


Received
■ MASS PRODUCTION
□ PRELIMINARY
□ CUSTOMER DESIGN
DEVICE NO. :
PAGE : 13

Revised record		
REV.	DESCRIPTION	RELEASE DATE
1	New spec	Aug.20.2013

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: DHE-0001303

EAFL2016W20A0

MASS PRODUTION



Features

- Small & compact package and with high efficiency
- Typical luminous flux: 200 lm @ 1000mA
- Typical color temperature: 6000 K@1000mA
- Optical efficiency@1000mA : 54 lm/W
- ESD protection up to 8KV
- Moisture Sensitivity Level (MSL) Class 1
- Grouping parameter: total luminous flux, color coordinates.
- RoHS compliant & Pb free.

Applications

- Mobile Phone Camera Flash(Camera flash light /strobe light for mobile devices)
- Torch light for DV(Digital Video) application
- Indoor lighting applications
- Signal and symbol luminaries for orientation maker lights (e.g. steps, exit ways, etc.)
- TFT backlighting
- Exterior and interior illumination applications
- Decorative and Entertainment Lighting
- Exterior and interior automotive illumination

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1

Device Selection Guide

Chip Materials	Emitted Color
InGaN	White

Absolute Maximum Ratings ($T_{solder\ pad}$ =25℃)

Parameter	Symbol	Rating	Unit
DC Forward Current (mA)	I_F	350	mA
Peak Pulse Current (mA) (400ms : ON，3600ms : OFF)	I_{Pulse}	1500	mA
ESD Resistance	V_B	8000	V
Reverse Voltage	V_R	[1]	V
Junction Temperature	T_J	125	℃
Thermal Resistance(junction to case)	R_s	10	℃/W
Operating Temperature	T_{Opr}	-40 ~ +85	℃
Storage Temperature	T_{Stg}	-40 ~ +110	℃
Power Dissipation (Pulse Mode)	P_d	6.5	W
Soldering Temperature	T_{Sol}	260	℃
Allowable Reflow Cycles	n/a	2	cycles
Viewing Angle$_{(2)}$	$2\theta_{1/2}$	120	deg

Note:

1. The Chin series LEDs are not designed for reverse bias used
2. View angle tolerance is ± 5∘
3. Avoid operating Chin series LEDs at maximum operating temperature exceed 1 hour.
4. All specification are assured by reliability test for 1000hr, IV degradation less than 30%.
5. For 1500 mA all reliability items are tested under good thermal management with 1.0x 1.0 cm2 MCPCB.
6. Peak pulse current shall be applied under conditions as max duration time 50ms and max duty cycle 10%
7. Operate LED component at maximum rating conditions continuously will cause possible permanent damage and de-rating parameters. Exercise multiple maximum rating parameters simultaneously should not be allowed. When maximum rating parameters are applied over a long period will result potential reliability issue.

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1

JEDEC Moisture Sensitivity

Level	Floor Life		Soak Requirements Standard	
	Time (hours)	Conditions	Time (hours)	Conditions
1	unlimited	≦30℃ / 85% RH	168(+5/-0)	85℃/ 85 RH

Electro-Optical Characteristics ($T_{solder\ pad}$ =25℃)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Flux(1)	Φv	160	200	250	lm	I_F=1000mA
Forward Voltage(2) (3)	V_F	2.95	----	4.45	V	
Low current low VF@10μA(4)	VF	2.0	----	----	V	
Correlated Color Temperature	CCT	4500	----	7000	K	

Note:

1. Luminous flux measurement tolerance: ±10%
2. Forward voltage measurement tolerance: ±0.1V
3. Electric and optical data is tested at 50 ms pulse condition
4. Low current voltage measurement tolerance: ±10%

Bin Range of Forward Voltage Binning

Bin Code	Min.	Typ.	Max.	Unit	Condition
2932	2.95	----	3.25	V	I_F=1000mA
3235	3.25	----	3.55		
3538	3.55	----	3.85		
3841	3.85	----	4.15		
4144	4.15	----	4.45		


Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1

Bin Range of Luminous Intensity

Bin Code	Min.	Typ.	Max.	Unit	Condition
J4	160	----	180	lm	I_F=1000mA
J5	180	----	200		
J6	200	----	250		

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1

White Bin Structure

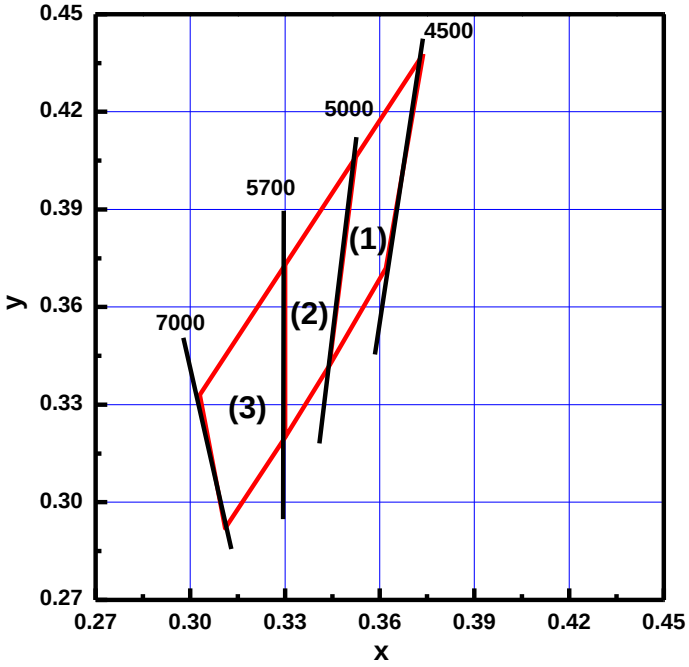

Notes：

1. Color Bin (1)：4550K
2. Color Bin (2)：5057K
3. Color Bin (3)：5770K

White Bin Coordinate

Bin	CIE-X	CIE-Y	CCT Reference Range
4550	0.3738	0.4378	4500K ~ 5000K
	0.3524	0.4061	
	0.3440	0.3420	
	0.3620	0.3720	
5057	0.3300	0.3200	5000K ~ 5700K
	0.3300	0.3730	
	0.3440	0.3420	
	0.3524	0.4061	
5770	0.3030	0.3330	5700K ~ 7000K
	0.3300	0.3730	
	0.3300	0.3200	
	0.3110	0.2920	


Note:



1. Color coordinates measurement allowance : ±0.01
2. Color bins are defined at I_F =1000mA and 50ms pulse operation condition.

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1

Typical Electro-Optical Characteristics Curves

Relative Spectral Distribution, I_F=1000mA@50ms, $T_{solder\ pad}$ =25℃

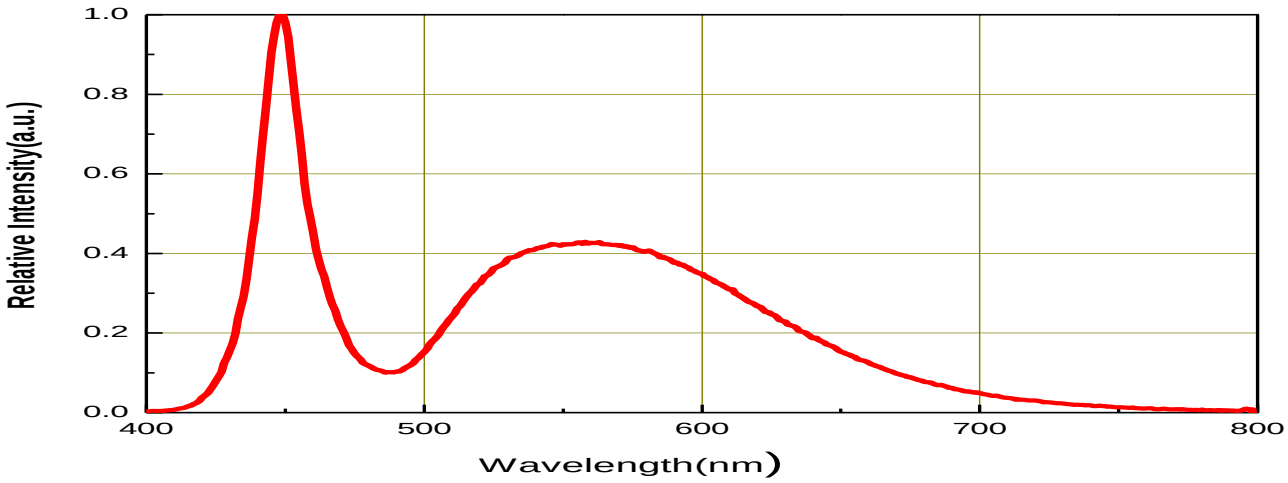

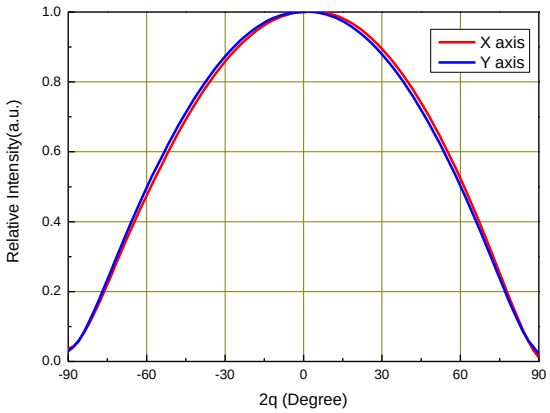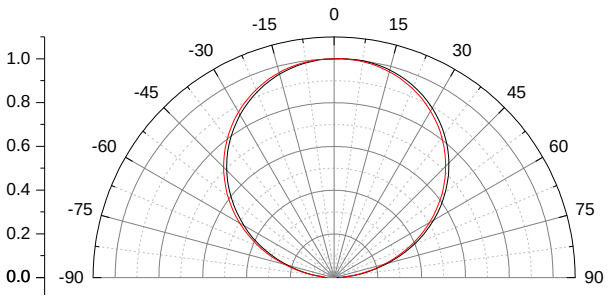
Typical Radiation Patterns		Typical Polar Radiation Pattern for Lambertian
Relativety Luminous intensity		
	Degree	

Note:


1. $2\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is ± 5° .

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1


Forward Voltage vs Forward Current,
$T_{solder\ pad}$ =25℃

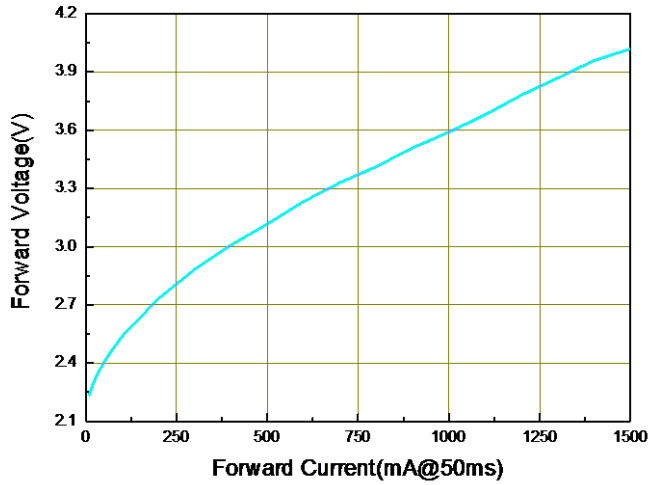


Correlated Color Temperature(CCT) vs. Forward Current

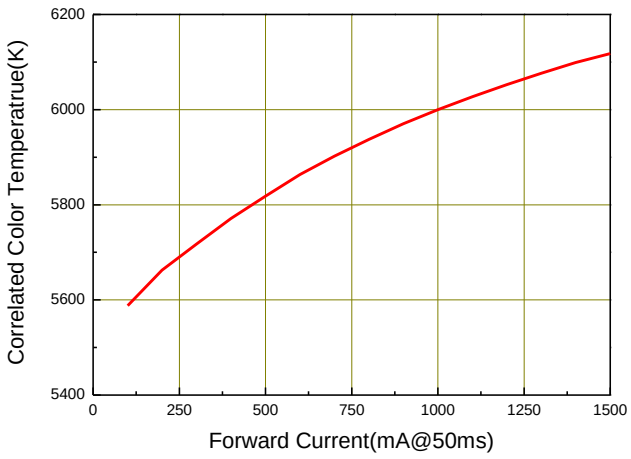

Luminous Flux vs Forward Current,
$T_{solder\ pad}$ =25℃

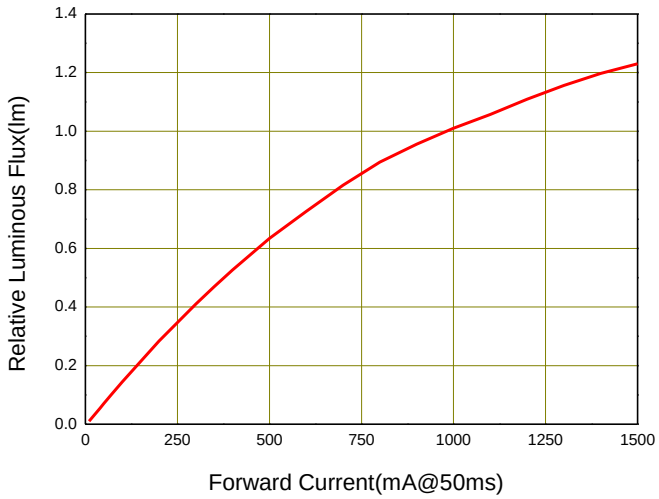

Forward Current Derating Curve,
Derating based on $T_{j\ MAX}$=125℃ at torch mode

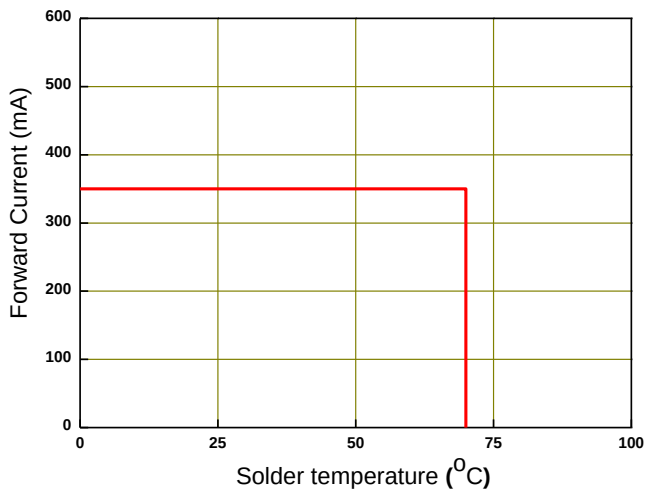


Note:

1. All correlation data is tested under superior thermal management with 1.0x 1.0 cm^2 MCPCB

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1

Package Dimension

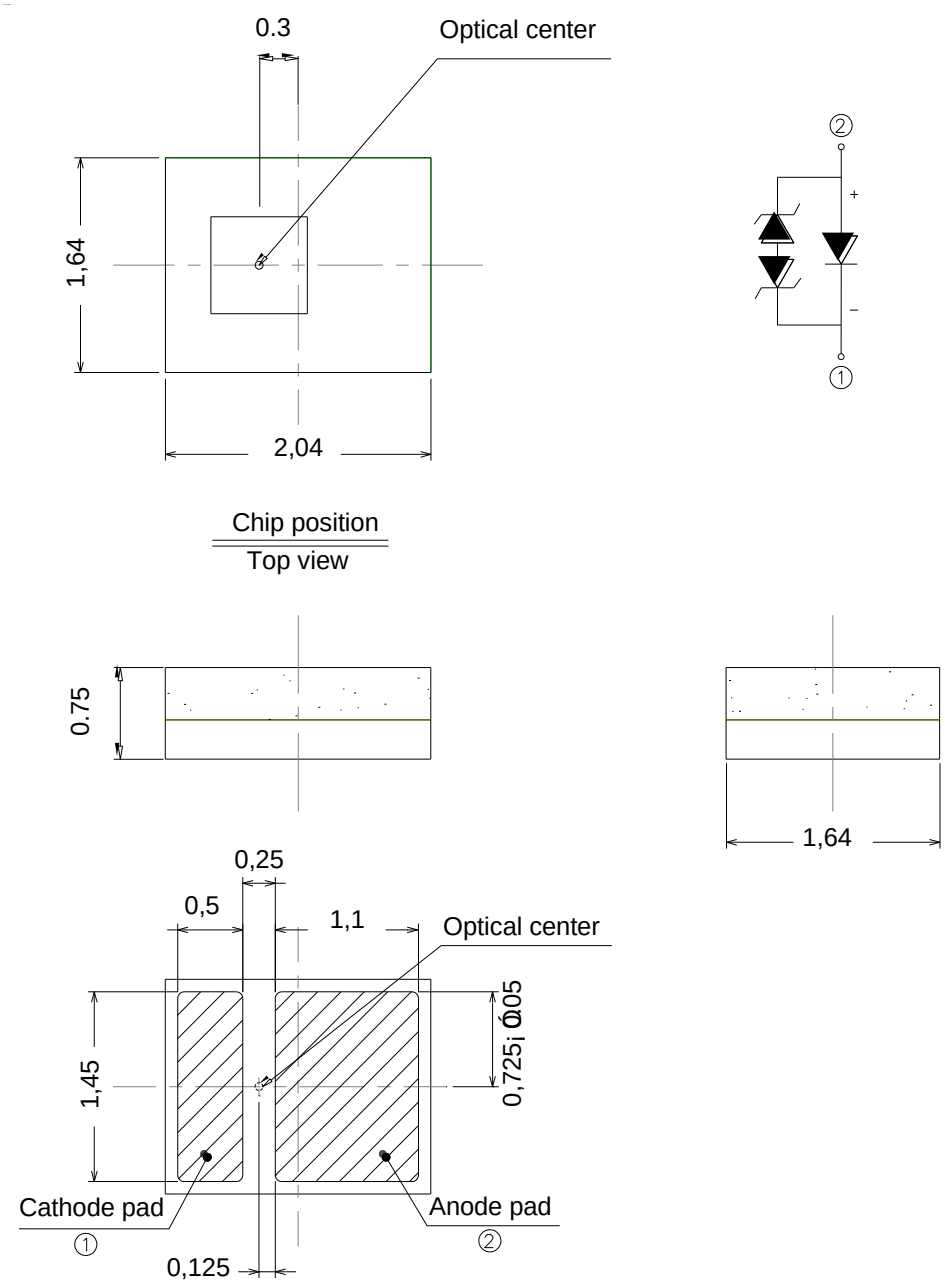


Note:

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are ± 0.1mm.

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1


Moisture Resistant Packing Materials

Label Explanation

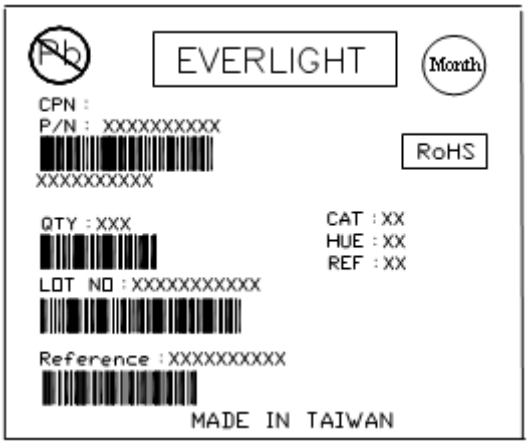

- CPN: Customer Specification (when required)
- P/N: Everlight Americas Production Number
- QTY: Packing Quantity
- CAT: Luminous Flux (Brightness) Bin
- HUE: Color Bin
- REF: Forward Voltage Bin
- LOT No: Lot Number

Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel

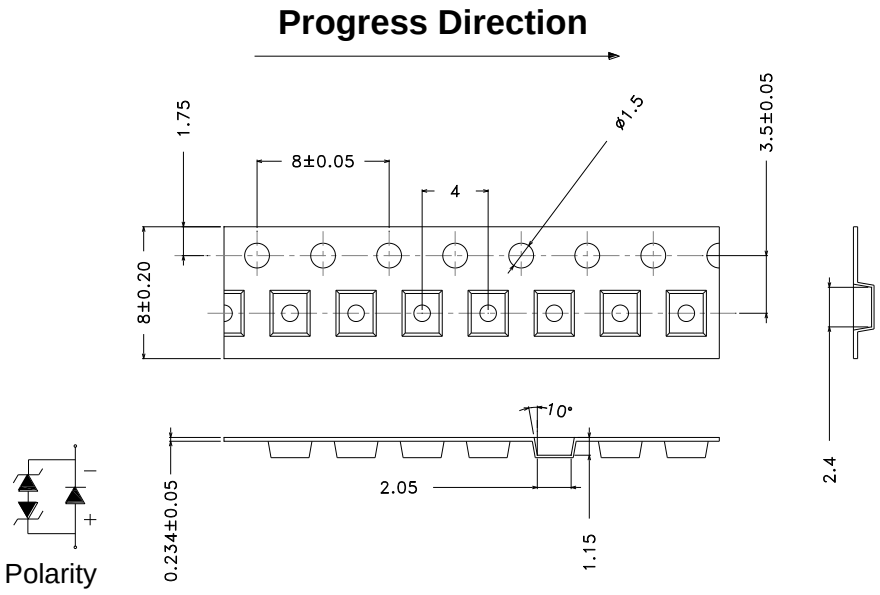


Note:

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are ± 0.1mm.

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1


Reel Dimensions

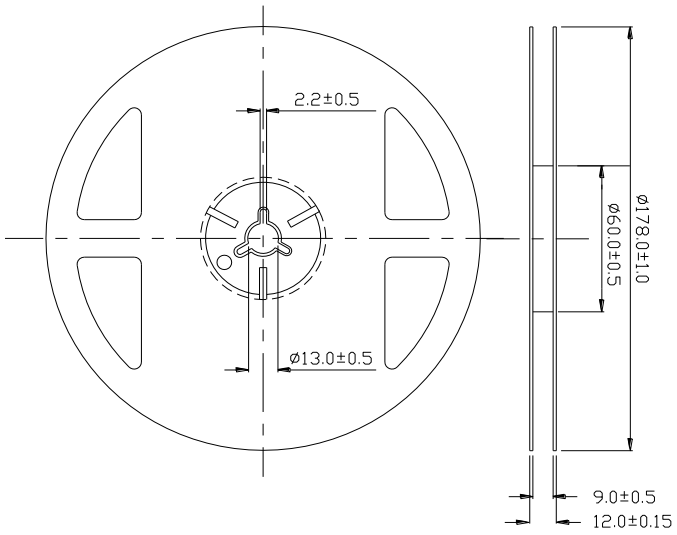

Note:

1. Dimensions are in millimeters.

Moisture Resistant Packing Process

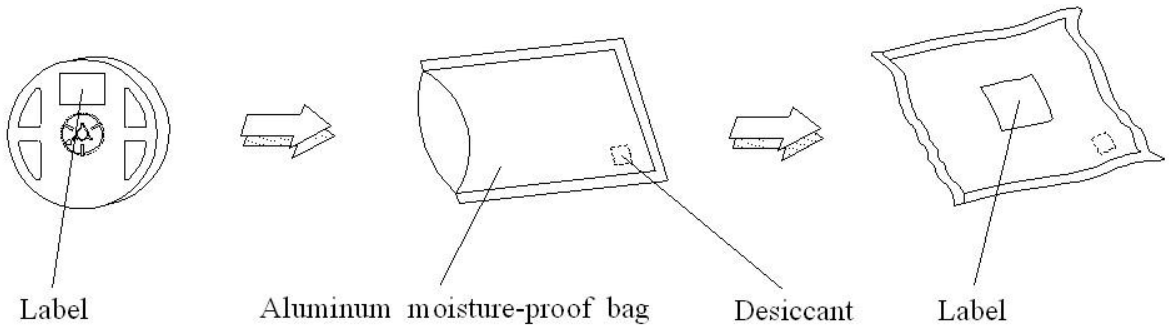

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1

Reflow Soldering Characteristics

Soldering and Handling

1. Over-current-proof

Though EAFL2016W20A0 series has conducted ESD protection mechanism, customers must not use the device in reverse and should apply resistors

for extra protection. Otherwise, slight voltage shift may cause enormous current shift and burn out failure would happen

2. Storage

i. Do not open the moisture-proof bag before the products are ready to use.

ii. Before opening the package, the LEDs should be stored at temperature less than 30℃ and less and relative humidity less than 90%.

After opening the package, the LEDs should be stored at temperature less than 30℃ and relative humidity less than 85%.

iii. If the moisture absorbent material (silicone gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be implemented based on the following conditions: Pre-curing at 60±5℃ for 24 hours.

3. Thermal Management


i. For maintaining the high flux output and achieving reliability, EAFL2016W20A0 series LEDs should be mounted on a metal core printed circuit board (MCPCB), with proper thermal connection to dissipate approximately 1W to 5W of thermal energy under normal operation.

ii. Sufficient thermal management must be conducted, or the die junction temperature will be over the limit under large electronic driving and LEDs lifetime will decrease critically

iii. When operating , the solder pad temperature (or the board temperature nearby the LED) must controlled under 70℃.

4. Soldering Condition

4.1 Soldering Pad

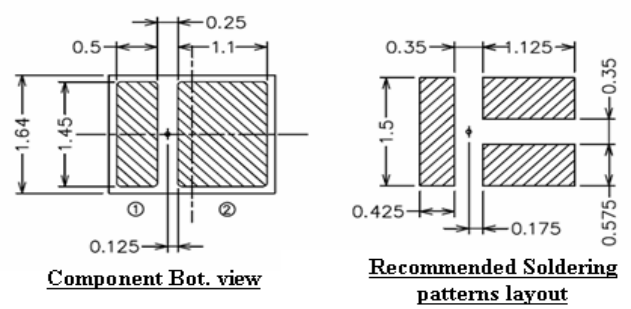


Component Bot. view

Recommended Soldering patterns layout

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1

4.2 For Reflow Process

i. Lead reflow soldering temperature profile

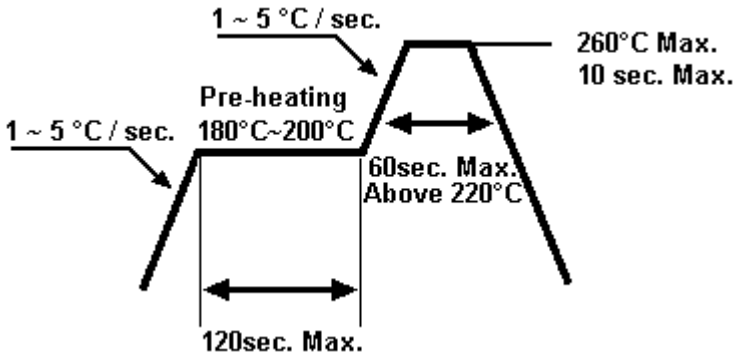

ii. Reflow soldering should not be done more than two times.

iii. While soldering, do not put stress on the LEDs during heating.

iv. After soldering, do not warp the circuit board.

Copyright © 2010, Everlight All Rights Reserved. Release Date : Aug.20.2013. Issue No: 1