

RF Power MOSFET Transistor 40W, 100-500 MHz, 28V

M/A-COM Products
Released; RoHS Compliant

Features

- N-channel enhancement mode device
- DMOS structure
- Lower capacitances for broadband operation
- Common source configuration
- Lower noise floor

ABSOLUTE MAXIMUM RATINGS AT 25° C

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DS}	65	V
Gate-Source Voltage	V_{GS}	20	V
Drain-Source Current	I_{DS}	4*	A
Power Dissipation	P_D	116	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-55 to 150	°C
Thermal Resistance	θ_{JC}	1.5	°C/W

TYPICAL DEVICE IMPEDANCES

F (MHz)	Z_{IN} (Ω)	Z_{LOAD} (Ω)
100	6.0-j20.0	25.0j27.0
300	2.5-j5.5	13.0+j13.0
500	4.0+j3.0	12.0j5.0

$V_{DD}=28V$, $I_{DQ}=500$ mA, $P_{OUT}=40.0$ W

Z_{IN} is the series equivalent input impedance of the device from gate to source.


Z_{LOAD} is the optimum series equivalent load impedance as measured from drain to ground.

ELECTRICAL CHARACTERISTICS AT 25°C

Parameter	Symbol	Min	Max	Units	Test Conditions
Drain-Source Breakdown Voltage	BV_{DSS}	65	-	V	$V_{GS} = 0.0$ V, $I_{DS} = 5.0$ mA
Drain-Source Leakage Current	I_{DSS}	-	1.0	mA	$V_{GS} = 28.0$ V, $V_{DS} = 0.0$ V
Gate-Source Leakage Current	I_{GSS}	-	1.0	μ A	$V_{GS} = 20.0$ V, $V_{DS} = 0.0$ V
Gate Threshold Voltage	$V_{GS(TH)}$	2.0	6.0	V	$V_{DS} = 10.0$ V, $I_{DS} = 100.0$ mA
Forward Transconductance	G_M	.5	-	S	$V_{DS} = 10.0$ V, $I_{DS} = 1.0$ A, $\Delta V_{GS} = 1.0$ V, 80 μ s Pulse
Input Capacitance	C_{ISS}	-	45	pF	$V_{DS} = 28.0$ V, $F = 1.0$ MHz
Output Capacitance	C_{OSS}	-	30	pF	$V_{DS} = 28.0$ V, $F = 1.0$ MHz
Reverse Capacitance	C_{RSS}	-	8	pF	$V_{DS} = 28.0$ V, $F = 1.0$ MHz
Power Gain	G_P	10	-	dB	$V_{DD} = 28.0$ V, $I_{DQ} = 500.0$ mA, $P_{OUT} = 40.0$ W $F = 500$ MHz
Drain Efficiency	η_D	50	-	%	$V_{DD} = 28.0$ V, $I_{DQ} = 500.0$ mA, $P_{OUT} = 40.0$ W $F = 500$ MHz
Load Mismatch Tolerance	VSWR-T	-	20:1	-	$V_{DD} = 28.0$ V, $I_{DQ} = 500.0$ mA, $P_{OUT} = 40.0$ W $F = 500$ MHz

*Per side

Package Outline

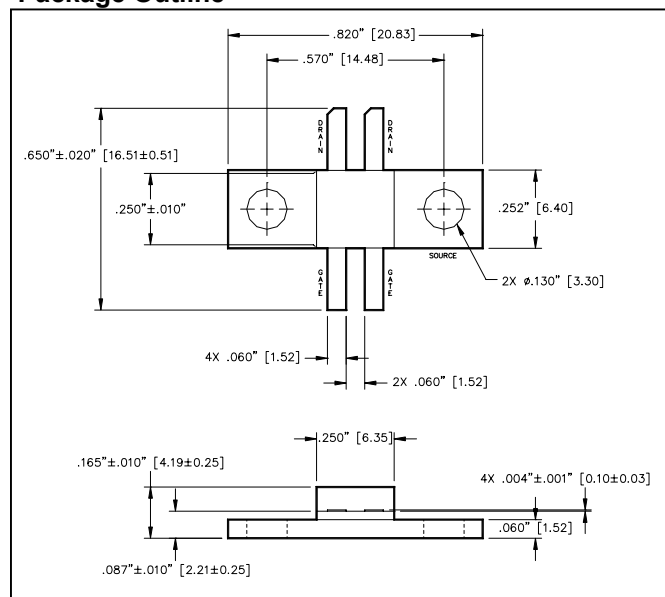

UNLESS OTHERWISE NOTED, TOLERANCES ARE INCHES $\pm .005$ " [MILLIMETERS ± 0.13 mm]






ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Typical Broadband Performance Curves

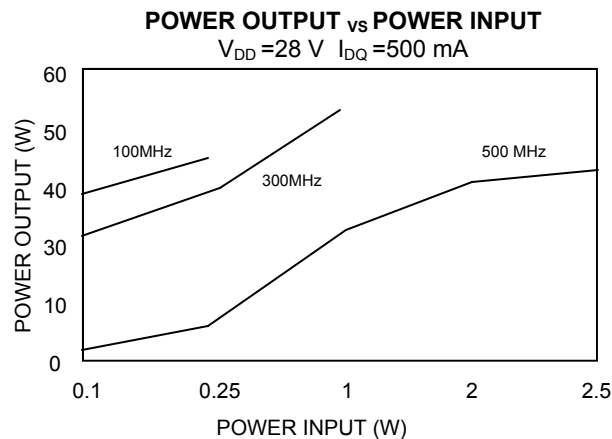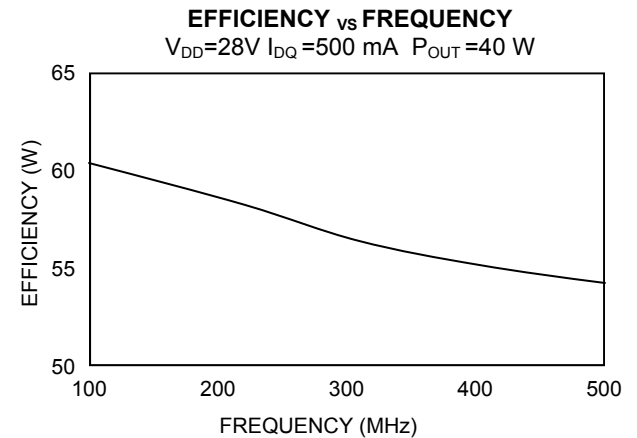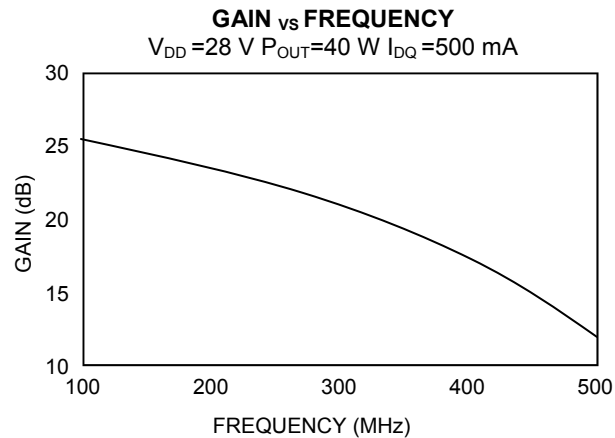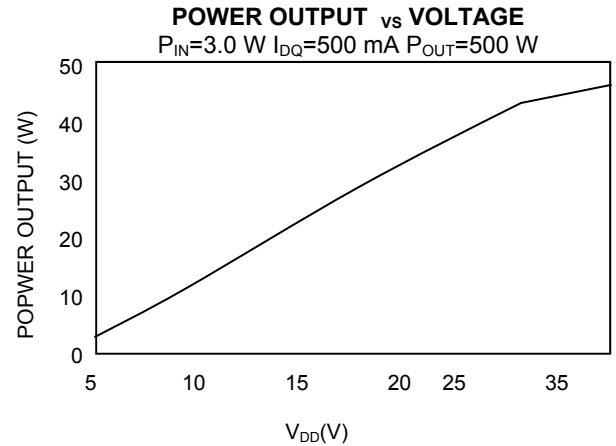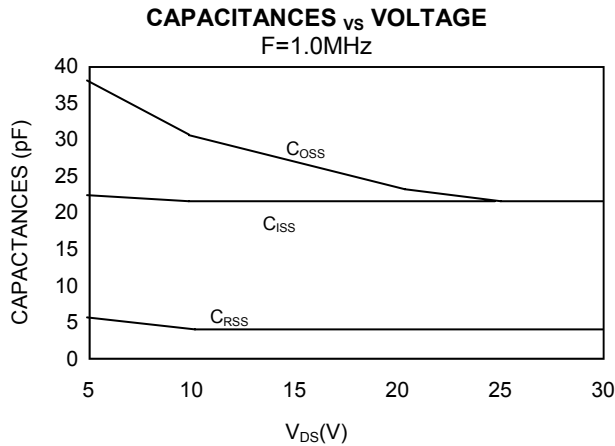

TEST FIXTURE SCHEMATIC

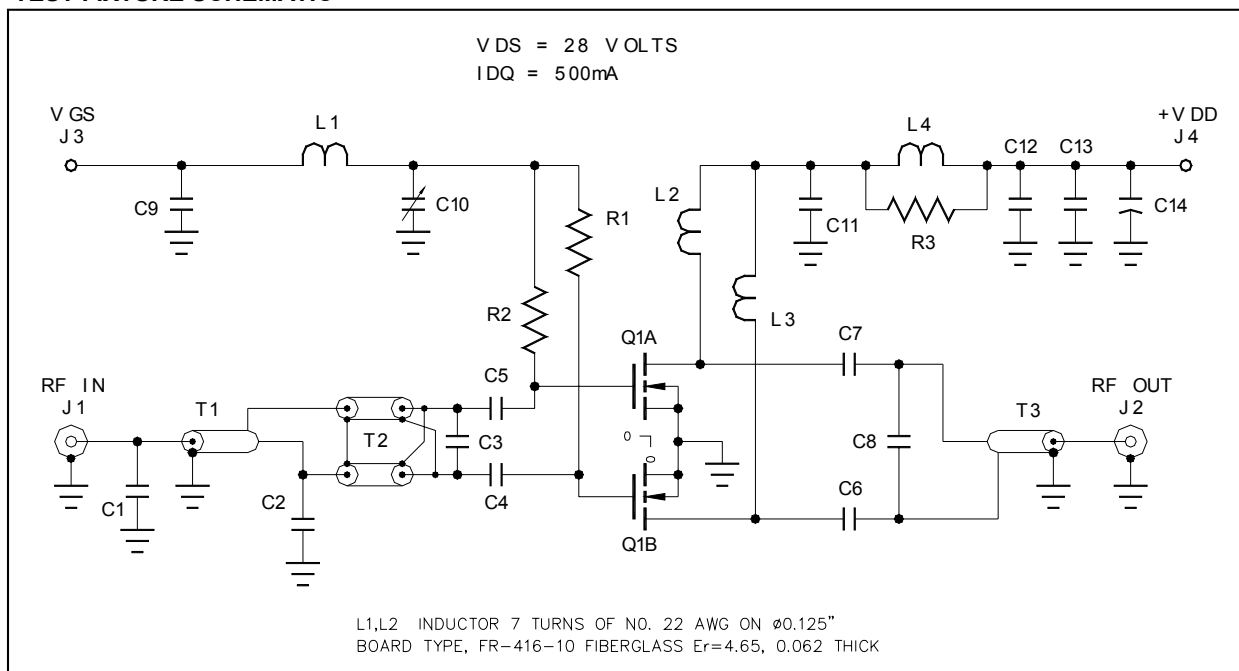

TEST FIXTURE SCHEMATIC

