Your right power solution for LCD TV,NB PC & various IT/AV applications

0405B series- Model: 0405B20220

220W 20V/11A



Features

- ⊙Best solution for N.B
- ⊙Universal AC input
- ⊙Efficiency: >85% @full load typical
- ⊙PFC >0.9 @240VAC
- ⊙High MTBF & Life

Safety

IEC60950

CB

Environmental

Operating Temperature:	0℃ to + 40℃
Storage Temperature:	-40℃ to + 70℃

Electrical specification


INPUT

AC input range	100 ~264VAC
Frequency	47 to 63Hz
Inrush current	200A @230VAC, cold start , 25℃
Input current	3.0A rms @100VAC full load
Efficiency	85% @full load typical
EMI/FRI	FCC part 15, subpart B Class B
	EN55022(CISPR22) Class B
Power saving	<1W/240VAC @ no load
Leakage current	0.5 mA max. @ 254Vac/ 50Hz

OUTPUT

Output rating (V/A)	20V/11A
Voltage regulation	19.3 ~ 20.6V
Max. Power (Po)	220W
Hold-up time	10ms. typical at full load ,115VAC
Over voltage protection	27V max. @latch mode
Overload protection	16.0A Max. @shut down
	& auto recovery mode .
Short CKT protection	shut down & auto recovery mode
Over temperature	
Protection	Optional @shut down mode

Outline Drawing (mm)

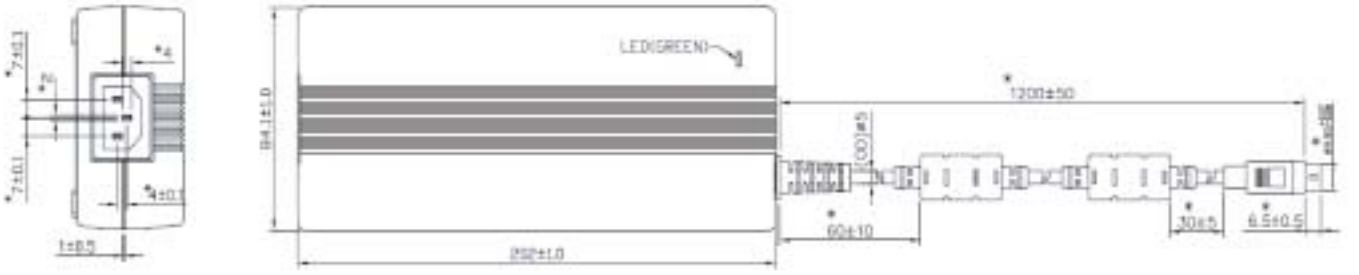

Output DC cable plug: Optional

*Specifications subject to change without notice.

RSG ELECTRONIC COMPONENTS
RSG Electronic Components GmbH ▪ Sprendlinger Landstr. 115 ▪ D-63069 Offenbach/Germany
Tel. +49 69 984047-0 ▪ Fax +49 69 984047-77 ▪ info@rsg-electronic.de ▪ www.rsg-electronic.de
Änderungen vorbehalten / subject to change without notice