

1N4001S -1N4007S

1.0 AMP. Silicon Rectifiers

A-405




Features

- ✦ High efficiency, Low VF
- ✦ High current capability
- ✦ High reliability
- ✦ High surge current capability
- ✦ Low power loss
- ✦ $\varnothing 0.6\text{mm}$ leads
- ✦ Green compound with suffix "G" on packing code & prefix "G" on datecode.

Mechanical Data

- ✦ Cases: Molded plastic
- ✦ Epoxy: UL 94V-0 rate flame retardant
- ✦ Lead: Pure tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- ✦ Polarity: Color band denotes cathode
- ✦ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✦ Weight: 0.22 gram

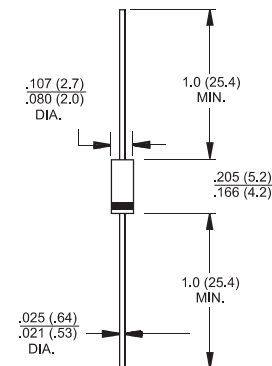

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	1N 4001S	1N 4002S	1N 4003S	1N 4004S	1N 4005S	1N 4006S	1N 4007S	Units
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length @T _A = 75 °C	I(AV)	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	IFSM	30							A
Maximum Instantaneous Forward Voltage @1.0A	VF	1.0							V
Maximum DC Reverse Current @ T _A =25 °C at Rated DC Blocking Voltage @ T _A =125 °C	IR	5.0 50							uA uA
Maximum Full Load Reverse Current, Full Cycle Average .375"(9.5mm) Lead Length @T _A =75 °C	HTIR	30							uA
Typical Junction Capacitance (Note 1)	Cj	15							pF
Typical Thermal Resistance (Note 2)	RθJA	50							°C/W
Operating and Storage Temperature Range	T _J ,T _{STG}	-65 to +150							°C

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4..0 Volts D.C.
2. Mount on Cu-Pad Size 5mm x 5m on P.C.B.

RATINGS AND CHARACTERISTIC CURVES (1N4001S THRU 1N4007S)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

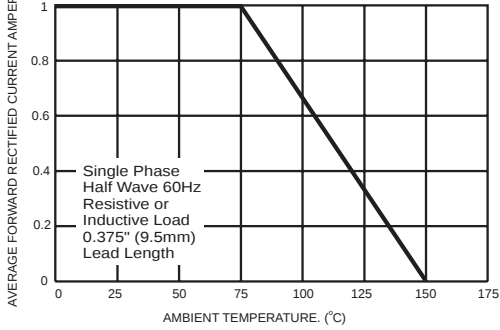


FIG.2- TYPICAL REVERSE CHARACTERISTICS

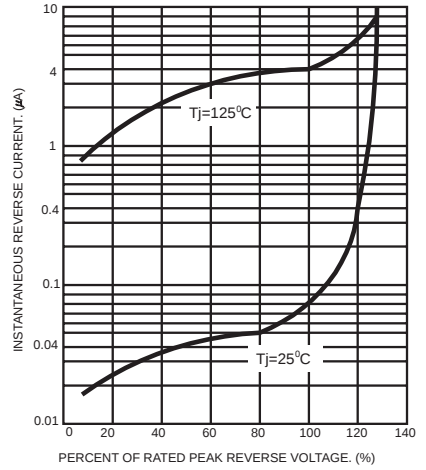


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

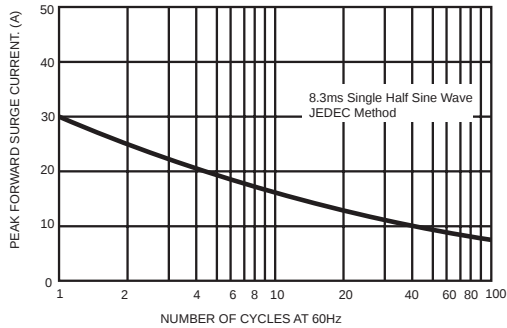


FIG.4- TYPICAL JUNCTION CAPACITANCE

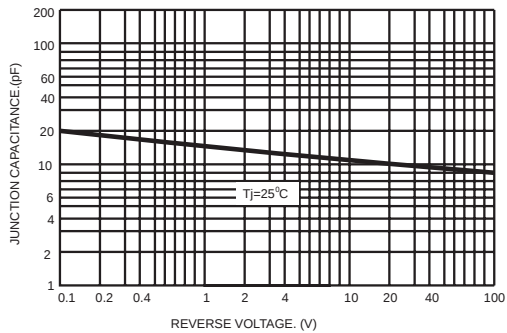


FIG.5- TYPICAL FORWARD CHARACTERISTICS

