


PR Series


3.5 x 6.0 x 1.0 mm Surface Mount Crystals



- Miniature low profile package
- RoHS Compliant
- Wide frequency range
- PCMCIA - high density PCB assemblies



ACTUAL SIZE



All dimensions
in inches (mm).

SUGGESTED SOLDER PAD LAYOUT





Figure 1
+260°C Reflow Profile

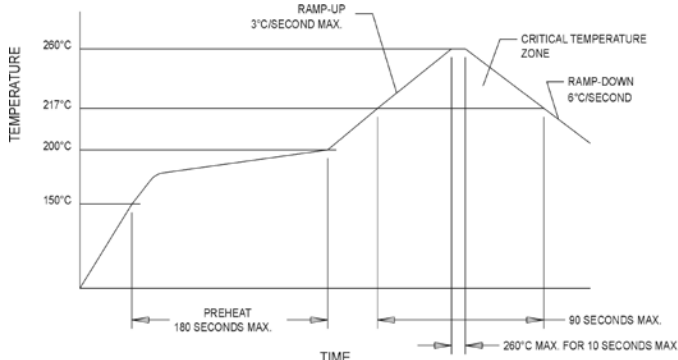

Ordering Information

Product Series	PR	1	M	M	XX	00.0000 MHz
Temperature Range	1: 0°C to +70°C	2: -40°C to +85°C				
Tolerance	D: ±10 ppm	F: ±15 ppm				
	G: ±20 ppm	H: ±25 ppm				
	J: ±30 ppm	M: ±50 ppm				
Stability	D: ±10 ppm	F: ±15 ppm				
	G: ±20 ppm	H: ±25 ppm				
	J: ±30 ppm	M: ±50 ppm				
	P: ±100 ppm					
Load Capacitance	Blank: 18 pF (std)					
	S: Series Resonant					
	XX: Customer Specified 10 pF to 32 pF					
Frequency (customer specified)						

Note: Not all combinations of stability and operating temperature are available.

PARAMETERS	VALUE
Frequency Range*	12.000 to 100.000 MHz
Tolerance @ +25°C	See Table Above
Stability	See Table Above
Aging	±5 ppm/yr. Max.
Shunt Capacitance	7 pF Max.
Load Capacitance	18 pF Std.
Standard Operating Conditions	-20°C to +70°C
Storage Temperature	-40°C to +85°C
Equivalent Series Resistance (ESR), Max.	
Fundamental (AT-cut)	
12.000 to 40.000 MHz	60 Ω
Third Overtones (AT-cut)	
40.000 to 100.000 MHz	60 Ω
Drive Level	100 μW Max., 50 μW Typ, 10 μW Min
Mechanical Shock	MIL-STD-202, Method 213, C
Vibration	MIL-STD-202, Method 201 & 204
Thermal Cycle	MIL-STD-883, Method 1010, B

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

MtronPTI Lead Free Solder Profile

