MUR460B


Super-Fast Recovery Diodes 4A FRED Pt

RoHS COMPLIANT

TO-220AC

Features

- Adopt FRED chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

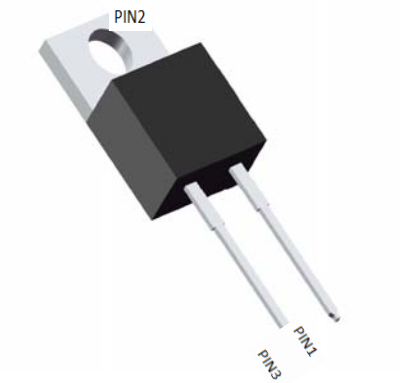


Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package**: TO-220AC
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity**: As marked



■Maximum Ratings (Tj=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MUR460B
Device marking code			MUR460B
Repetitive Peak Reverse Voltage	V_{RRM}	V	600
Average Rectified Output Current @60Hz sine wave, R-load, Tc(FIG.1)	I_O	A	4
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, Tj=25℃	I_{FSM}	A	50
Current Squared Time @1ms≤t≤8.3ms Tj=25℃	I^2t	A^2s	10
Storage Temperature	T_{stg}	℃	-55 ~ +175
Junction Temperature	Tj	℃	-55 ~ +175
Typical Junction capacitance @4V,1MHz	Cj	pF	20

Download from alldatasheet.com

MUR460B

RoHS COMPLIANT

■Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Instantaneous forward voltage drop per diode	V_{FM}	V	I_{FM}=4.0A @Tj=25℃		-	1.85	2.20
			I_{FM}=4.0A @Tj=150℃			1.65	1.90
DC reverse current at rated DC blocking voltage per diode	I_{RRM1}	uA	V_{RM}=V_{RRM} Tj=25℃		-	-	5
	I_{RRM2}		V_{RM}=V_{RRM} Tj=150℃		-	35	200
Reverse Recovery Time	T_{RR}	ns	I_F=0.5A I_{RM}=1A I_{RR}=0.25A Tj=25℃		-	18	20
			Tj=25℃	I_F=5A di/dt=-200A/us V_{RM}=200V	-	40	-
			Tj=125℃		-	85	-
Peak recovery current	I_{RRM}	A	Tj=25℃		-	3.15	-
			Tj=125℃		-	5.15	-
Reverse recovery charge	Qrr	nC	Tj=25℃		-	85	-
			Tj=125℃		-	225	-

■Thermal Characteristics （Tj=25℃ Unless otherwise specified）

PARAMETER		SYMBOL	UNIT	MUR460B
Thermal Resistance	Between junction and case	$R_{\theta J-C}$	℃/W	2.0
	Between junction and Air	$R_{\theta J-A}$	℃/W	50

■Ordering Information (Example)

PREFERED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MUR460B	Approximate 1.8	50	1000	5000	Tube

Download from alldatasheet.com

RoHS COMPLIANT

■Characteristics (Typical)

FIG1:Io -Tc Curve

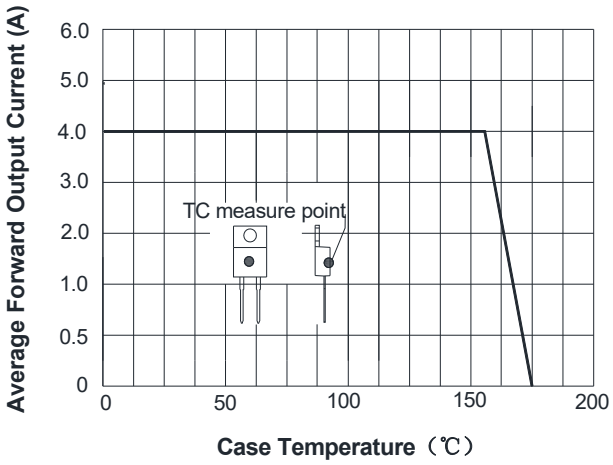


FIG2:Surge Forward Current Capability

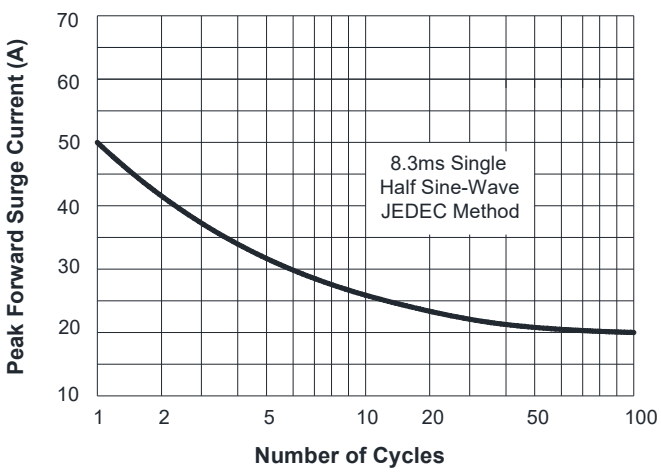


FIG3: Forward Voltage

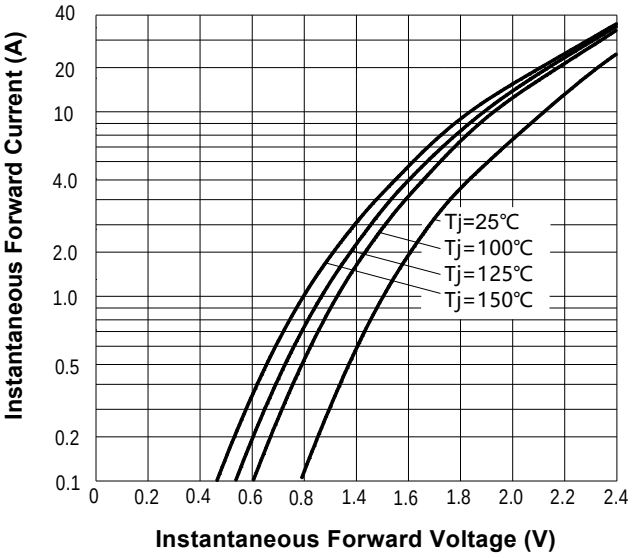


FIG.4: Instantaneous Reverse Characteristics



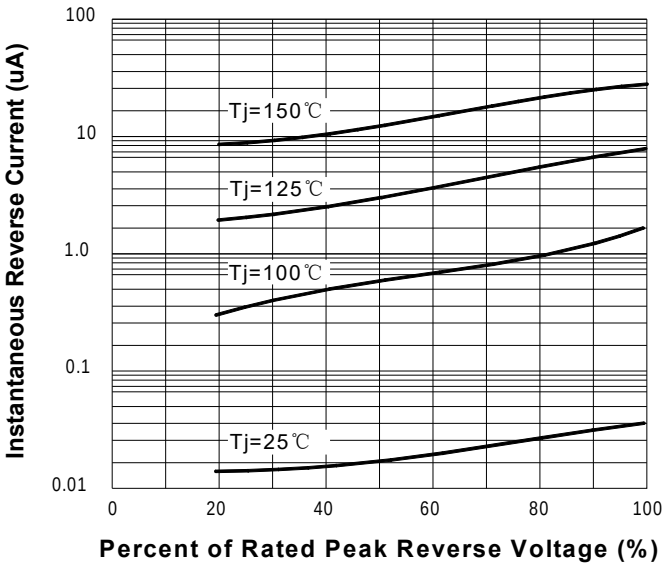


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

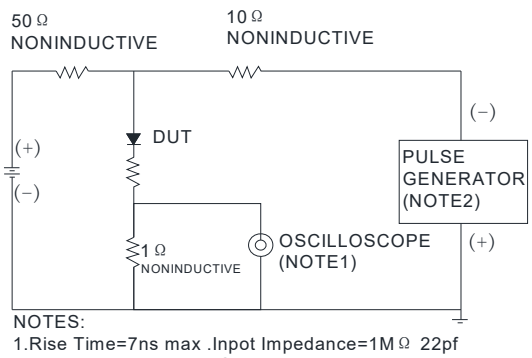


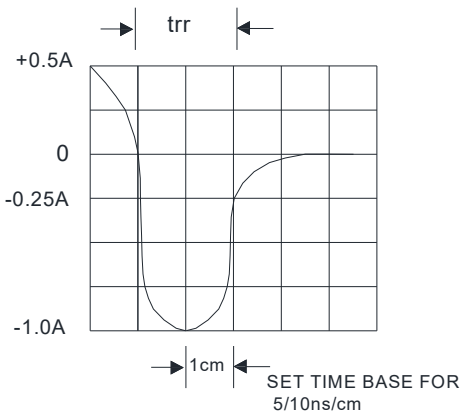

Download from alldatasheet.com

RoHS COMPLIANT

■Outline Dimensions

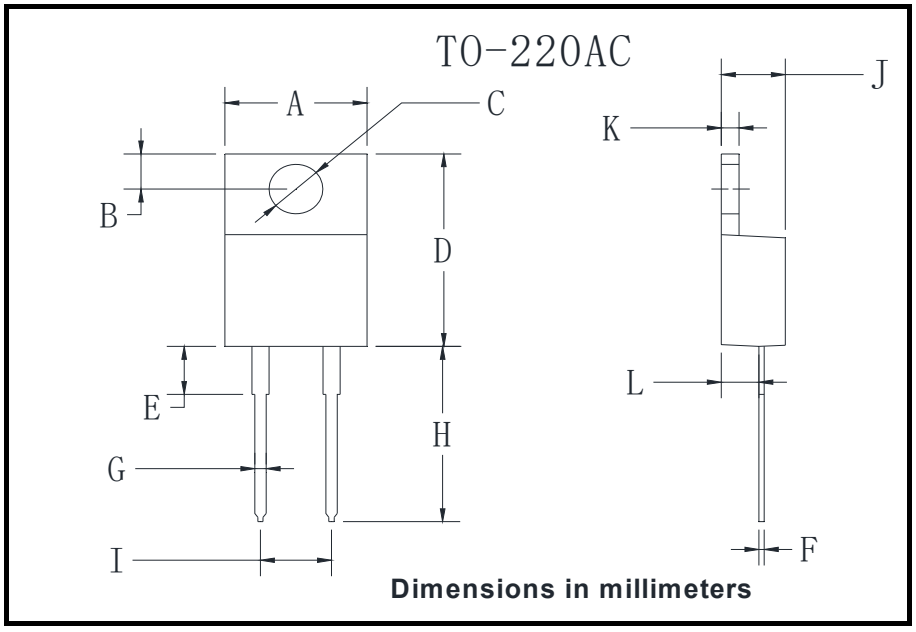

Dimensions in millimeters

TO-220AC		
Dim	Min	Max
A	9.95	10.35
B	2.55	2.95
C	3.75	4.05
D	14.95	15.25
E	3.75	4.25
F	0.26	0.5
G	0.68	0.94
H	13.3	13.9
I	4.86	5.26
J	4.38	4.78
K	1.14	1.4
L	2.37	2.79

Download from alldatasheet.com