SANYOURELAYS
Relays for advanced technology

High Voltage DC Relay SEV150



Feature

- 150 amps continuous carry,1500 amps interrupte under extreme condition.
- Hermetically sealed with hydrogen gas,the arc is not exposed. Be able to use in explosive & harsh environments without oxidation or contamination of contacts.Contacts' part meet IP67 protection degree.
- Not position sensitive- can be mounted in any position for ease of installation.
- RoHS compliant.

Contact Data

Item		Information	
Contact arrangement		1 Form A contact	
Current rating		150A	
Contact resistance		≤1.5mΩ (@6V 20A)	
Min.Switching load		12VDC 1A	
Max. Switching voltage		900VDC	
Max. Breaking current		1500A (450VDC , 1 cycle)	
Max. Switching power		112.5KW	
Electrical life(1)		**500V type**	**750V type**
	Resistive load	500VDC,150A 3 10^3 cycles	750VDC,150A 1 10^3 cycles
		break only : 360VDC,75A 1 10^4 cycles	break only : 600VDC,75A 6 10^3 cycles
	Capacitive load	2.5 10^4cycles 22.5VDC,τ=1ms inrush 400A steady 150A	2.5 10^4cycles 37.5VDC,τ=1ms inrush 400A steady 150A
		make only : 1cycle 360VDC,τ=1ms inrush 1350A steady 150A	
Load current capacity(2)		150A : continuity	
		180A : 2h	
		300A : 10min	
		600A : 2min	
		900A : 30s	
		1500A : 0.6s	

Parameters Table

Item		Information
Mechanical life		5 10^5 cycles
Insulation resistance		1000MΩ(500VDC)
Dielectric strength	Between open contacts	3000VAC 1min 10mA
	Between contact and coil	4000VAC 1min 10mA
Operate time (at rated coil voltage)		≤30ms
Release time (at rated coil voltage)		≤10ms
Shock resistance	Functional	196m/s² (20G)
	Destructive	490m/s² (50G)
Vibration resistance		10Hz~500Hz 49m/s² (5G)
Ambient temperature		-40℃~85℃
Ambient humidity		5%~95% RH
Weight		Approx.352g
External dimension		75mm 40mm 74.5mm

Coil Data (3)

Rated voltage (VDC)	12	24	48
Operation voltage (VDC)	12	24	48
Max. voltage (VDC)	16	32	64
Pick-up voltage (VDC)	≤9	≤18	≤36
Drop-out voltage (VDC)	≥1.0	≥2.0	≥4.0
Coil resistance(10%)(Ω)	32	128	512
Operating power (inrush , W)	4.5	4.5	4.5
Operating power (stable , W)	4.5	4.5	4.5

NOTES :
(1) Ambient temperature:23℃ , L/R≤1ms.
(2) Ambient temperature:23℃ , 45mm² conductor.
(3) Other types of rated voltage,please contact us.

Ordering Information

Nomenclature

SEV 150- □ **M** □ □ □ □

Customer special code
Nil : No customer special requirement
Numbers or Letters : Customer special requirement

Load connection type
1 : connect plate+external thread
2 : internal thread

Coil connection type **Nil** : outgoing line
C : outgoing line+connector

Coil voltage **12** : 12VDC
24 : 24VDC
48 : 48VDC

Contact arrangement **M** : 1 Form A


Voltage rating **750** : 12~750VDC
450 : 12~450VDC

Load current **150** : 150A

Type designation **SEV**


Packing quantity:1pcs inner carton, 20pcs outer carton


Outline Dimensions(Connect Plate+External Thread)

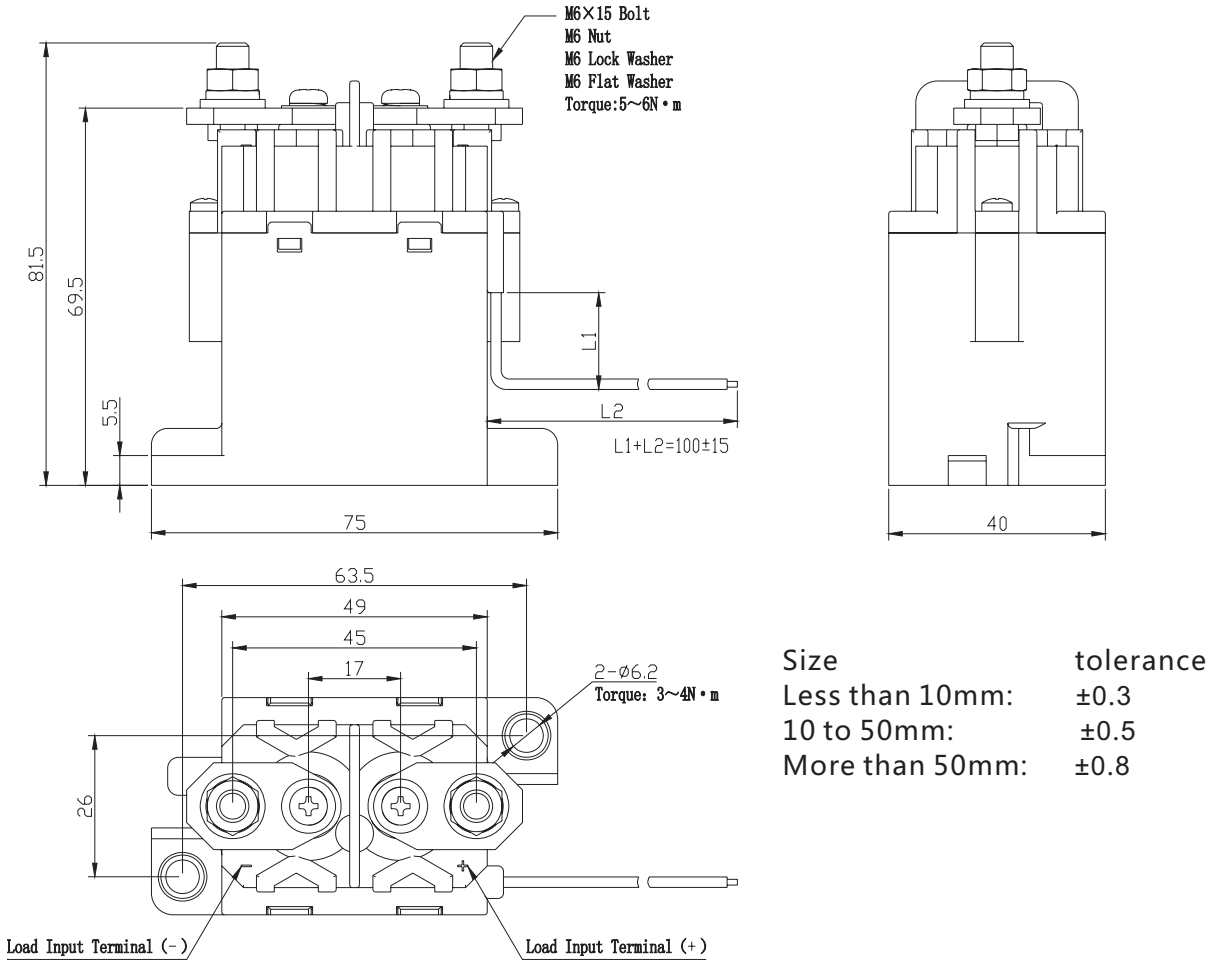


Size	tolerance
Less than 10mm:	±0.3
10 to 50mm:	±0.5
More than 50mm:	±0.8

Outline Dimensions(Internal Thread)

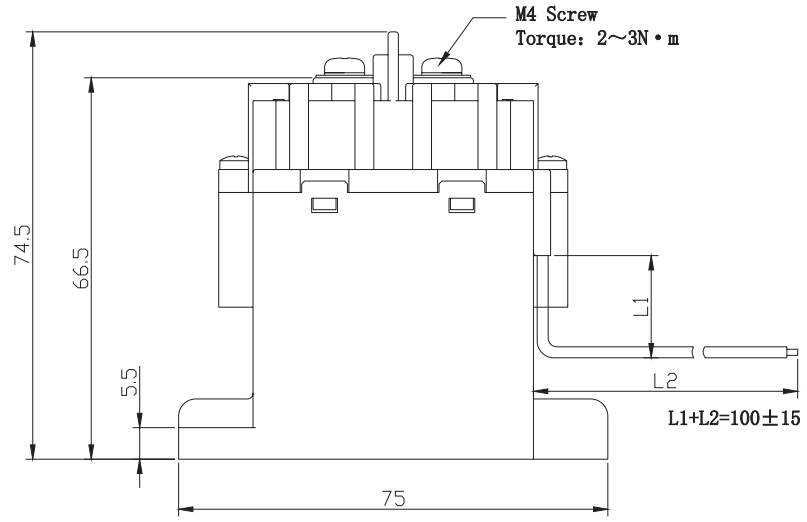

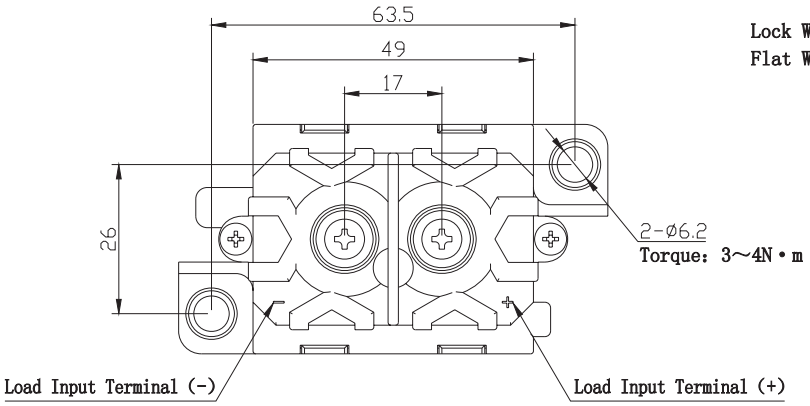


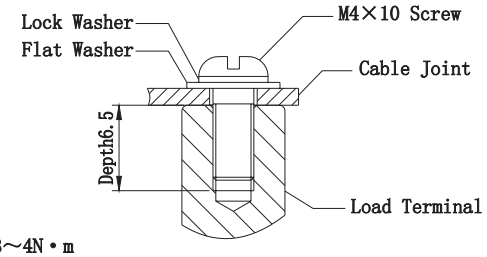


Size	tolerance
Less than 10mm:	±0.3
10 to 50mm:	±0.5
More than 50mm:	±0.8

Coil Connection Type


C : Outgoing Line+Connector (Accessories)

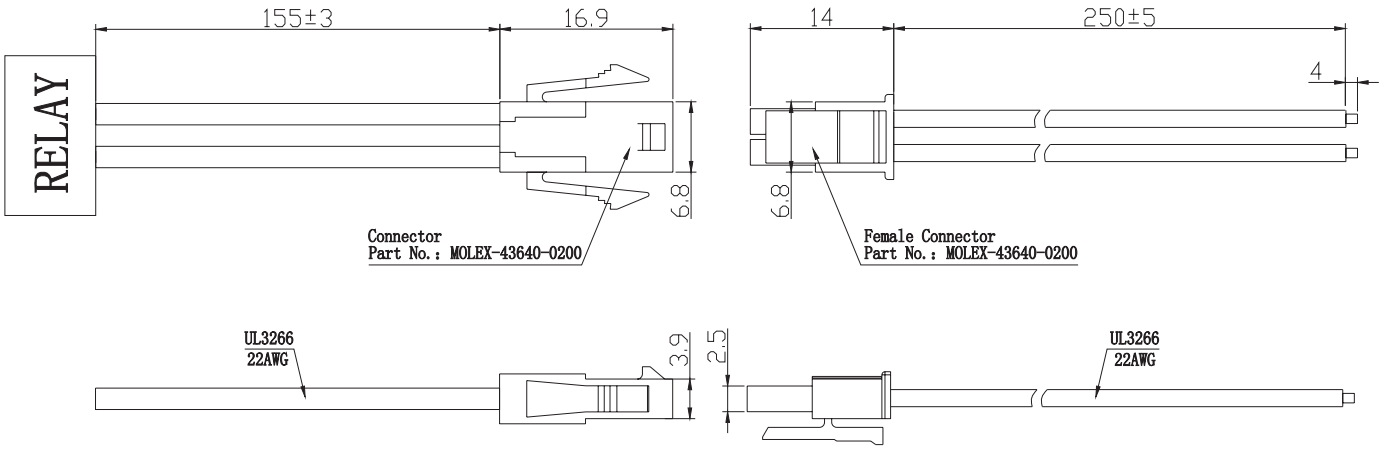

Installation Size Chart

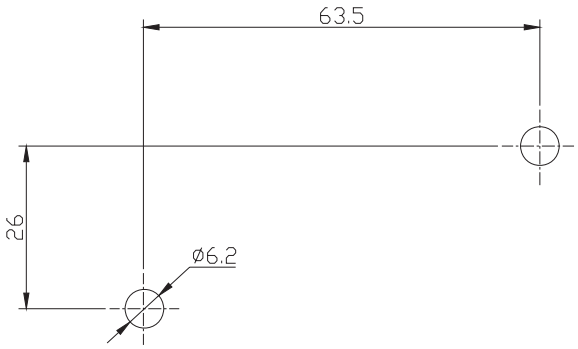

Schematic Diagram

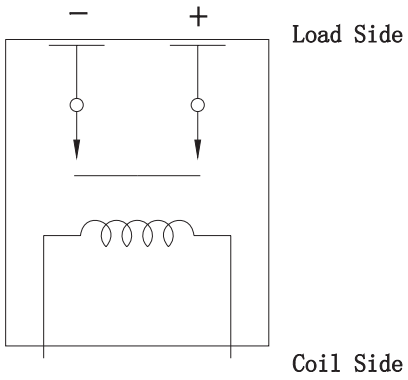

NOTE:The contacts are polarized

NOTES

●Mounting Attention

1.When installing the relay, always use washers to prevent the screws from loosening.
2.Tighten each screw within the rated range given in the outline dimensions. Exceeding the maximum torque may result in breakage.
3.Avoid mounting the relay in strong magnetic fields (near a transformer or magnet) or close to an object that radiates heat.

●Electrical Life Attention

1.This relay is a DC high-voltage switch. In its final breakdown mode, it may lose the ability to provide the proper cut-off.Therefore, do not exceed the indicated switching capacity and life.
2.Please treat the relay as a product with limited life and replace it when necessary.
3.The contacts of the relay are polarized. Please follow instructions in the connection schematic when connecting the contacts.
4.Be careful that foreign matter and oils and fats kind, don’ t stick to the main terminal parts because it is likely to cause terminal parts to give off unusual heat. Also, please use the following specifications of conductor.

10A	Min. 2mm^2 nominal cross-sectional area
20A	Min. 3mm^2 nominal cross-sectional area
40A	Min. 10mm^2 nominal cross-sectional area
60A	Min. 15mm^2 nominal cross-sectional area
100A	Min. 35mm^2 nominal cross-sectional area
150A	Min. 45mm^2 nominal cross-sectional area
200A	Min. 60mm^2 nominal cross-sectional area
250A	Min. 80mm^2 nominal cross-sectional area
300A	Min. 100mm^2 nominal cross-sectional area

●Coil Attention

1.Please note that when using a diode, the switching speed may decrease and cause a reduction in cut-off performance, we recommend installing a surge protector varistor.
2.The pick-up voltage and drop-out voltage will change with ambient temperature, please use rated voltage to make sure the relay operate reliable. Don’ t exceed maximum coil voltage.
3.The 250A and 300A types have built-in dedicated drive circuit, please drive the coil with a quick startup (Built-in one-shot pulse generator circuit).
4.After the ON signal enters the 250A and 300A types, automatic coil current switching occurs after approximately 0.1 seconds.Do not repeatedly turn it OFF within that 0.1 seconds interval, as doing so may damage the relay.

Disclaimer :
This datasheet is the customers’ reference. All the specification are subject to change without notice.
We could not evaluate all the performance and parameters for every possible application. Thus the users should be in a right position to choose the suitable product for their own application. If there is any query, please contact Sanyou for technical service. However it is the users' responsibility to determine which product should be used only.
SANYOU CORPORATION LIMITED. All rights reserved by Sanyou.