

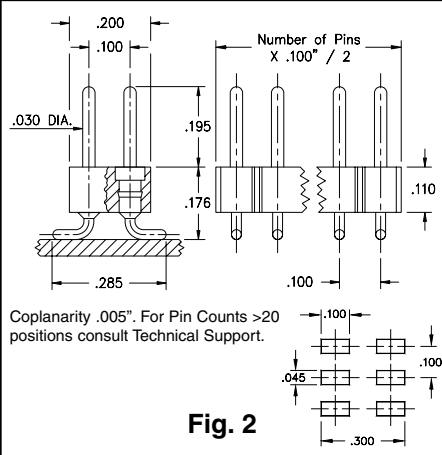



- Series 800 & 802 use MM #7007 pins. See page 182 for details.
- Series 801 & 803 use MM #1304 receptacles and accept pin diameters from .025"-.037" and .025" square pins. See page 148 for details.
- Receptacles use Hi-Rel, 6 finger BeCu #47 contact rated at 4.5 amps. See page 221 for details.
- Insulators are high temp. thermoplastic.

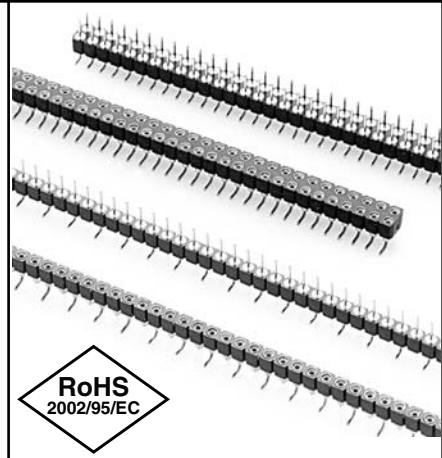

<b>Ordering Information</b>	
<b>Fig. 1</b>	<b>800...001 Single Row Surface Mount Header</b>
	800-10-0__-30-001000 Specify # of pins → 03-64
<b>Fig. 2</b>	<b>802...001 Double Row Surface Mount Header</b>
	802-10-0__-30-001000 Specify # of pins → 04-72

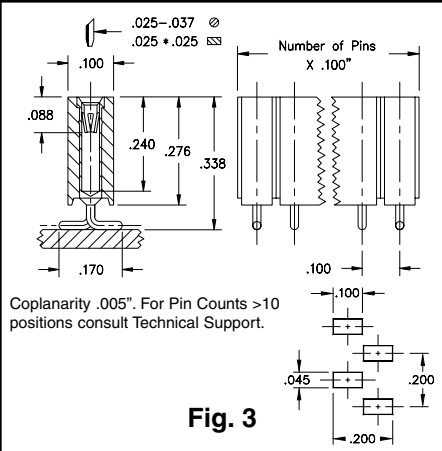

<i>For Electrical, Mechanical &amp; Environmental Data, See pg. 4</i>		<i>For RoHS compliance select ◇ plating code.</i>	
PLATING CODE =	10◇		
Pin Plating	10μ" Au		

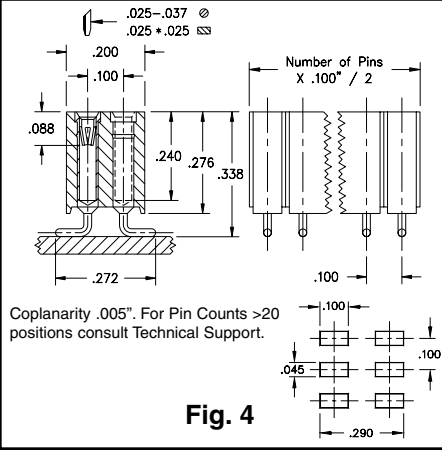

<b>Fig. 3</b>	<b>801...001 Single Row Surface Mount Socket</b>
	801-43-0__-30-001000 Specify # of pins → 03-50
<b>Fig. 4</b>	<b>803...001 Double Row Surface Mount Socket</b>
	803-XX-__-30-001000 Specify # of pins → 004-100

<i>For Electrical, Mechanical &amp; Environmental Data, See pg. 4</i>		<i>XX=Plating Code See Below</i>		<i>For RoHS compliance select ◇ plating code.</i>	
SPECIFY PLATING CODE XX=		93		43◇	
Sleeve (Pin)		200μ" Sn/Pb		200μ" Sn	
Contact (Clip)		30μ" Au		30μ" Au	