
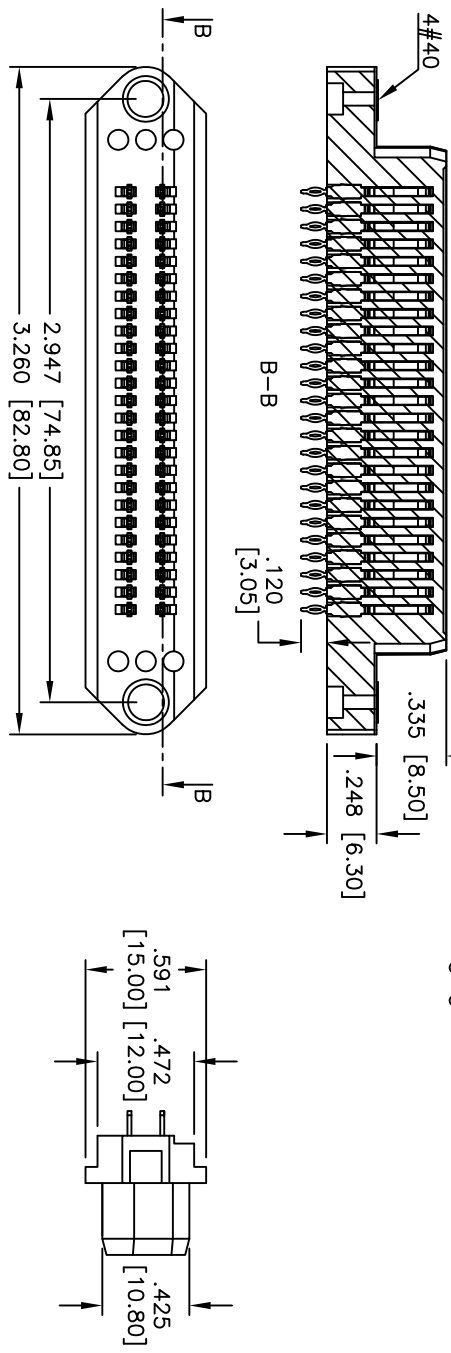


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/20/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

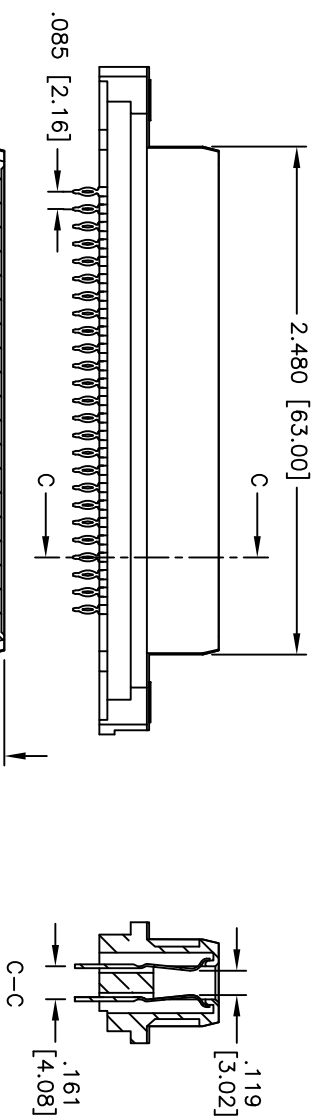

**SPECIFICATIONS:**

Material: Insulator: PBT, glass reinforced, rated UL 94V-0  
 Insulator color: Blue  
 Contacts: Phosphor Bronze  
 Shell: Steel, Nickel plated  
 Hood: Steel  
 Plating: 30u" Gold over Nickel underplate on contact area, Tin over Copper underplate on tails.

Electrical: Current rating: 5 Amp max  
 Contact resistance: 25 mohms max  
 Insulation resistance: 1000 Mohms min @ 500V  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
 Temperature Rating: Operating temperature: -55°C to +105°C



Environmental: Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINIATURE RIBBON PLUG, CENTRONIC PCB STRAIGHT  
 #440 THREADED HOLES, PRESS FIT PIN

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLE	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS:	DATE:	DATE:	
DRAWN	DY	10/20/09	
CHECKED			
APPROVED			
SIZE	PART NO.	MR50-SB-34+PF-30	REV.
X			-
REF:	S00033T	SCALE:	NTS
SHEET 1 OF 1			