
2SC3838

NPN SILICON TRANSISTOR

HIGH-FREQUENCY AMPLIFIER TRANSISTOR

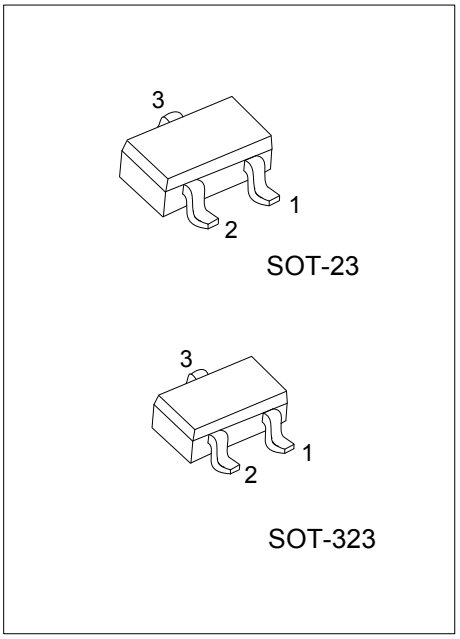

■ FEATURES


*High transition frequency.
*Small rbb'·Cc and high gain.
*Small NF.

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2SC3838L-x-AE3-R	2SC3838G-x-AE3-R	SOT-23	E	B	C	Tape Reel
2SC3838L-x-AL3-R	2SC3838G-x-AL3-R	SOT-323	E	B	C	Tape Reel

2SC3838L-x-AE3-R (1)Packing Type (2)Package Type (3)Rank (4)Lead Free	(1) R: Tape Reel (2) AE3: SOT-23, AL3: SOT-323 (3) x: refer to Classification of h_{FE} (4) L: Lead Free , G: Halogen Free

■ MARKING



Copyright © 2011 Unisonic Technologies Co., Ltd

■ ABSOLUTE MAXIMUM RATINGS (Ta = 25℃)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	V_{CBO}	20	V
Collector-Emitter Voltage	V_{CEO}	11	V
Emitter-Base Voltage	V_{EBO}	3	V
Collector current	I_C	50	mA
Collector power dissipation	P_D	0.2	W
Junction Temperature	T_J	+150	°C
Storage Temperature	T_{STG}	-55 ~ +150	°C

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (Ta= 25℃, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	BV_{CBO}	I_C=10μA	20			V
Collector-emitter breakdown voltage	BV_{CEO}	I_C=1mA	11			V
Emitter-base breakdown voltage	BV_{EBO}	I_E=10μA	3			V
Collector cutoff current	I_{CBO}	V_{CB}=10V			0.5	μA
Emitter cutoff current	I_{EBO}	V_{EB}=2V			0.5	μA
Collector-emitter saturation voltage	$V_{CE(SAT)}$	I_C =10mA, I_B= 5mA			0.5	V
DC current transfer ratio	h_{FE}	V_{CE}=10V, I_C =5mA	56		400	
Transition frequency	f_T	V_{CE}=10V, I_E=10mA, f=500MHz	1.4	3.2		GHz
Output capacitance	Cob	V_{CB}=10V, I_E=0A, f=1MHz		0.8	1.5	pF
Collector-base time constant	rbb'·Cc	V_{CB}=10V, I_C=10mA, f=31.8MHz		4	12	ps
Noise factor	NF	V_{CE}=6V, I_C=2mA, f=500MHz, Rg=50Ω		3.5		dB

■ CLASSIFICATION of h_{FE}

RANK	A	B	C	D
RANGE	56 ~ 110	100 ~ 170	120 ~ 270	250 ~ 400

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.