

KMQ Series

- Downsized from current standard KMG series
- Solvent resistant type except 160 to 450V_{dc}
(see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant





◆ SPECIFICATIONS

Items	Characteristics													
Category	Temperature Range													
Rated Voltage Range	-55 to +105°C(6.3 to 100V _{dc}) -40 to +105°C(160 to 400V _{dc}) -25 to +105°C(450V _{dc})													
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)													
Leakage Current	6.3 to 100V _{dc}							160 to 450V _{dc}						
	≤φ18	I=0.03CV or 4μA, whichever is greater. (at 20°C after 1 minute)							CV Time After 1minute					
									CV≤1,000 I=0.1CV+40 max.					
									CV>1,000 I=0.04CV+100 max.					
	≥φ20	I=0.03CV max.							(at 20°C after 3 minutes)					
Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)														
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	350 to 400V	450V		
	tanδ (Max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.24	0.24		
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)														
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63 to 100V	160 to 200V	250V	350V	400V	450V	
	Z(-25°C)/Z(+20°C)	≤φ8	5	4	3	2	2	2	2	3	3	4	4	6
		≥φ10	5	4	3	2	2	2	2	3	3	4	4	6
	Z(-40°C)/Z(+20°C)	≤φ8	10	8	6	4	3	3	3	8	10	8	8	—
		≥φ10	10	8	6	4	3	3	3	4	4	6	6	—
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 1,000 hours (2,000 hours for φ10 and more at 105°C).													
	Capacitance change	≤±20% of the initial value												
	D.F. (tanδ)	≤200% of the initial specified value												
	Leakage current	≤The initial specified value												
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.													
	Rated voltage	6.3 to 100V _{dc}						160 to 450V _{dc}						
	Capacitance change	≤±20% of the initial value						≤±20% of the initial value						
	D.F. (tanδ)	≤200% of the initial specified value						≤200% of the initial specified value						
	Leakage current	≤The initial specified value						≤500% of the initial specified value						


◆ DIMENSIONS [mm]

- Terminal Code : E

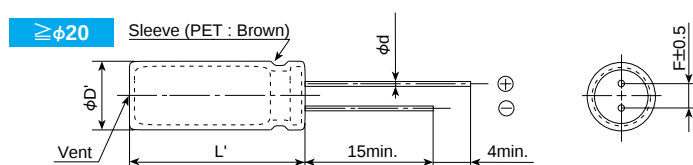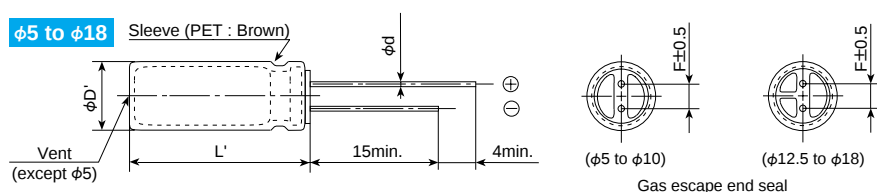

ΦD	5	6.3	8	10	12.5	16	18	20	22
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0
$\Phi D'$	$\Phi D + 0.5 \max.$							$\Phi D + 0.5 \max.$	
L'	L + 1.5 max.							L + 2.0 max.	

◆PART NUMBERING SYSTEM

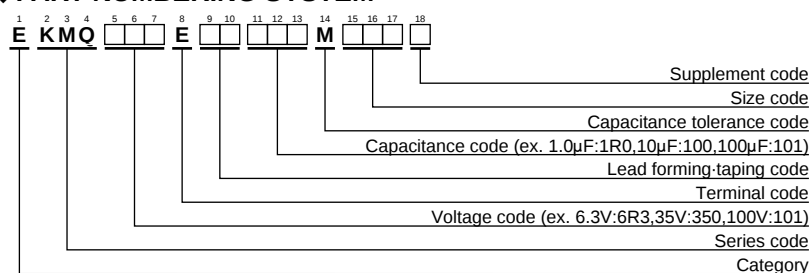

Please refer to "Product code guide
(radial lead type)"

◆STANDARD RATINGS

□ is not solvent resistant.

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mArms/ 105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mArms/ 105°C,120Hz)	Part No.
6.3	1,000	8×11.5	0.28	390	EKMQR3E□□102MHB5D	50	330	10×16	0.12	410	EKMQR50E□□331MJ16S
	2,200	10×16	0.30	635	EKMQR3E□□222MJ16S		470	10×20	0.12	540	EKMQR50E□□471MJ20S
	3,300	10×20	0.32	840	EKMQR3E□□332MJ20S		1,000	12.5×25	0.12	950	EKMQR50E□□102MK25S
	4,700	12.5×20	0.34	1,090	EKMQR3E□□472MK20S		2,200	16×31.5	0.14	1,410	EKMQR50E□□222MLN3S
	6,800	12.5×25	0.38	1,350	EKMQR3E□□682MK25S		3,300	18×35.5	0.16	1,770	EKMQR50E□□332MMP1S
	10,000	16×25	0.46	1,650	EKMQR3E□□103ML25S		4,700	20×40	0.18	2,100	EKMQR50E□□472MN40S
	15,000	16×31.5	0.56	1,820	EKMQR3E□□153MLN3S		6,800	22×50	0.22	2,500	EKMQR50E□□472MP50S
	22,000	18×35.5	0.70	2,280	EKMQR3E□□223MMP1S	63	22	5×11	0.10	71	EKMQR63E□□220ME11D
	33,000	20×40	0.92	2,500	EKMQR3E□□333MN40S		33	6.3×11	0.10	100	EKMQR63E□□330MF11D
	47,000	22×50	1.20	2,780	EKMQR3E□□473MP50S		47	6.3×11	0.10	120	EKMQR63E□□470MF11D
10	220	5×11	0.24	155	EKMQR100E□□221ME11D		68	8×11.5	0.10	155	EKMQR63E□□680MHB5D
	330	6.3×11	0.24	210	EKMQR100E□□331MF11D		100	8×11.5	0.10	200	EKMQR63E□□101MHB5D
	470	6.3×11	0.24	250	EKMQR100E□□471MF11D		220	10×16	0.10	335	EKMQR63E□□221MJ16S
	1,000	10×12.5	0.24	460	EKMQR100E□□102MJC5S		330	10×20	0.10	510	EKMQR63E□□331MJ20S
	2,200	10×16	0.26	705	EKMQR100E□□222MJ16S		470	12.5×20	0.10	640	EKMQR63E□□471MK20S
	3,300	12.5×20	0.28	1,000	EKMQR100E□□332MK20S		1,000	16×25	0.10	930	EKMQR63E□□102ML25S
	4,700	12.5×25	0.30	1,260	EKMQR100E□□472MK25S		2,200	18×35.5	0.12	1,650	EKMQR63E□□222MMP1S
	6,800	16×25	0.34	1,570	EKMQR100E□□682ML25S		3,300	20×40	0.14	1,950	EKMQR63E□□332MN40S
	10,000	16×31.5	0.42	1,820	EKMQR100E□□103MLN3S		4,700	22×50	0.16	2,450	EKMQR63E□□472MP50S
	15,000	16×35.5	0.52	2,050	EKMQR100E□□153MLP1S	100	1.0	5×11	0.08	15	EKMQR101E□□1R0ME11D
16	22,000	18×40	0.66	2,420	EKMQR100E□□223MM40S		2.2	5×11	0.08	21	EKMQR101E□□2R2ME11D
	33,000	22×50	0.88	3,210	EKMQR100E□□333MP50S		3.3	5×11	0.08	29	EKMQR101E□□3R3ME11D
	220	6.3×11	0.20	190	EKMQR160E□□221MF11D		4.7	5×11	0.08	32	EKMQR101E□□4R7ME11D
	330	6.3×11	0.20	225	EKMQR160E□□331MF11D		10	5×11	0.08	50	EKMQR101E□□100ME11D
	470	8×11.5	0.20	315	EKMQR160E□□471MHB5D		22	6.3×11	0.08	93	EKMQR101E□□220MF11D
	1,000	10×12.5	0.20	500	EKMQR160E□□102MJC5S		33	8×11.5	0.08	130	EKMQR101E□□330MHB5D
	2,200	10×20	0.22	710	EKMQR160E□□222MJ20S		47	8×11.5	0.08	140	EKMQR101E□□470MHB5D
	3,300	12.5×25	0.24	1,170	EKMQR160E□□332MK25S		68	10×12.5	0.08	190	EKMQR101E□□680MJC5S
	4,700	16×25	0.26	1,500	EKMQR160E□□472ML25S		100	10×16	0.08	240	EKMQR101E□□101MJ16S
	6,800	16×25	0.30	1,600	EKMQR160E□□682ML25S		220	12.5×20	0.08	390	EKMQR101E□□221MK20S
25	10,000	16×35.5	0.38	1,930	EKMQR160E□□103MLP1S		330	12.5×25	0.08	540	EKMQR101E□□331MK25S
	15,000	18×40	0.48	2,210	EKMQR160E□□153MM40S	160	470	16×25	0.08	715	EKMQR101E□□471ML25S
	22,000	22×40	0.62	2,710	EKMQR160E□□223MP40S		1,000	18×35.5	0.08	960	EKMQR101E□□102MMP1S
	100	5×11	0.16	125	EKMQR250E□□101ME11D		2,200	22×50	0.10	1,750	EKMQR101E□□222MP50S
	220	6.3×11	0.16	200	EKMQR250E□□221MF11D		10	8×11.5	0.20	41	EKMQR161E□□100MHB5D
	330	8×11.5	0.16	310	EKMQR250E□□331MHB5D		22	10×12.5	0.20	92	EKMQR161E□□220MJC5S
	470	10×12.5	0.16	380	EKMQR250E□□471MJC5S		33	10×16	0.20	125	EKMQR161E□□330MJ16S
	1,000	10×16	0.16	610	EKMQR250E□□102MJ16S		47	10×20	0.20	150	EKMQR161E□□470MJ20S
	2,200	12.5×25	0.18	1,090	EKMQR250E□□222MK25S		68	12.5×20	0.20	250	EKMQR161E□□680MK20S
	3,300	16×25	0.20	1,400	EKMQR250E□□332ML25S		100	12.5×25	0.20	310	EKMQR161E□□101MK25S
	4,700	16×25	0.22	1,570	EKMQR250E□□472ML25S		220	16×31.5	0.20	540	EKMQR161E□□221MLN3S
35	6,800	16×35.5	0.26	1,850	EKMQR250E□□682MLP1S		330	18×35.5	0.20	705	EKMQR161E□□331MMP1S
	10,000	18×40	0.34	2,000	EKMQR250E□□103MM40S		470	18×40	0.20	855	EKMQR161E□□471MM40S
	15,000	22×50	0.44	2,750	EKMQR250E□□153MP50S	200	1.0	6.3×11	0.20	16	EKMQR201E□□1R0MF11D
	47	5×11	0.14	93	EKMQR350E□□470ME11D		2.2	6.3×11	0.20	25	EKMQR201E□□2R2MF11D
	68	6.3×11	0.14	110	EKMQR350E□□680MF11D		3.3	6.3×11	0.20	30	EKMQR201E□□3R3MF11D
	100	6.3×11	0.14	150	EKMQR350E□□101MF11D		4.7	6.3×11	0.20	35	EKMQR201E□□4R7MF11D
	220	8×11.5	0.14	270	EKMQR350E□□221MHB5D		10	8×11.5	0.20	57	EKMQR201E□□100MHB5D
	330	10×12.5	0.14	350	EKMQR350E□□331MJC5S		22	10×16	0.20	105	EKMQR201E□□220MJ16S
	470	10×16	0.14	460	EKMQR350E□□471MJ16S		33	10×20	0.20	140	EKMQR201E□□330MJ20S
	1,000	12.5×20	0.14	810	EKMQR350E□□102MK20S		47	12.5×20	0.20	195	EKMQR201E□□470MK20S
	2,200	16×25	0.16	1,260	EKMQR350E□□222ML25S		68	12.5×25	0.20	250	EKMQR201E□□680MK25S
	3,300	16×31.5	0.18	1,500	EKMQR350E□□332MLN3S	250	100	16×25	0.20	335	EKMQR201E□□101ML25S
50	4,700	16×35.5	0.20	1,780	EKMQR350E□□472MLP1S		220	16×35.5	0.20	500	EKMQR201E□□221MLP1S
	6,800	18×40	0.24	2,000	EKMQR350E□□682MM40S		330	18×40	0.20	675	EKMQR201E□□331MM40S
	10,000	22×50	0.32	2,650	EKMQR350E□□103MP50S		3.3	6.3×11	0.20	28	EKMQR251E□□1R0MF11D
	1.0	5×11	0.12	13	EKMQR500E□□1R0ME11D		4.7	6.3×11	0.20	35	EKMQR251E□□4R7MF11D
	2.2	5×11	0.12	20	EKMQR500E□□2R2ME11D		10	10×12.5	0.20	71	EKMQR251E□□100MJC5S
	3.3	5×11	0.12	25	EKMQR500E□□3R3ME11D		22	10×20	0.20	105	EKMQR251E□□220MJ20S
	4.7	5×11	0.12	30	EKMQR500E□□4R7ME11D		33	10×20	0.20	140	EKMQR251E□□330MJ20S
	10	5×11	0.12	46	EKMQR500E□□100ME11D		47	12.5×20	0.20	190	EKMQR251E□□470MK20S
	22	5×11	0.12	68	EKMQR500E□□220ME11D		68	16×25	0.20	270	EKMQR251E□□680ML25S
	33	5×11	0.12	90	EKMQR500E□□330ME11D	350	100	16×25	0.20	310	EKMQR251E□□101ML25S
	47	6.3×11	0.12	115	EKMQR500E□□470MF11D		220	18×35.5	0.20	485	EKMQR251E□□221MMP1S
	68	6.3×11	0.12	150	EKMQR500E□□680MF11D		2.2	6.3×11	0.24	21	EKMQR351E□□2R2MF11D
	100	8×11.5	0.12	190	EKMQR500E□□101MHB5D		3.3	8×11.5	0.24	30	EKMQR351E□□3R3MHB5D
	220	10×12.5	0.12	300	EKMQR500E□□221MJC5S		4.7	8×11.5	0.24	39	EKMQR351E□□4R7MHB5D

□ : Enter the appropriate lead forming or taping code.

◆STANDARD RATINGS

 is not solvent resistant.

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.
350	10	10×12.5	0.24	64	EKM351E□□100MJC5S	450	2.2	8×11.5	0.24	20	EKM451E□□2R2MHB5D
	22	12.5×20	0.24	130	EKM351E□□220MK20S		3.3	10×12.5	0.24	28	EKM451E□□3R3MJC5S
	33	12.5×25	0.24	170	EKM351E□□330MK25S		4.7	10×12.5	0.24	32	EKM451E□□4R7MJC5S
	47	16×25	0.24	230	EKM351E□□470ML25S		10	10×20	0.24	56	EKM451E□□100MJ20S
	68	16×25	0.24	285	EKM351E□□680ML25S		22	12.5×25	0.24	100	EKM451E□□220MK25S
	100	18×31.5	0.24	375	EKM351E□□101MMN3S		33	16×25	0.24	125	EKM451E□□330ML25S
400	1.0	6.3×11	0.24	15	EKM401E□□1R0MF11D		47	16×31.5	0.24	155	EKM451E□□470MLN3S
	2.2	8×11.5	0.24	27	EKM401E□□2R2MHB5D		68	18×35.5	0.24	185	EKM451E□□680MMP1S
	3.3	8×11.5	0.24	34	EKM401E□□3R3MHB5D		100	18×40	0.24	200	EKM451E□□101MM40S
	4.7	10×12.5	0.24	42	EKM401E□□4R7MJC5S						
	10	10×16	0.24	64	EKM401E□□100MJ16S						
	22	12.5×25	0.24	145	EKM401E□□220MK25S						
	33	16×25	0.24	195	EKM401E□□330ML25S						
	47	16×25	0.24	200	EKM401E□□470ML25S						
	68	16×31.5	0.24	240	EKM401E□□680MLN3S						
	100	18×35.5	0.24	310	EKM401E□□101MMP1S						

□□ : Enter the appropriate lead forming or taping code.

◆RATED RIPLE CURRENT MULTIPLIERS

●Frequency Multipliers

(φ5 to φ18)

Capacitance (μF)	Frequency (Hz)	50	120	300	1k	10k	100k
1.0 to 4.7		0.65	1.00	1.35	1.75	2.30	2.50
10 to 68		0.75	1.00	1.25	1.50	1.75	1.80
100 to 1,000		0.80	1.00	1.15	1.30	1.40	1.50
2,200 to		0.85	1.00	1.03	1.05	1.08	1.08

(φ20 to φ22)

Rated Voltage (Vdc)	Frequency (Hz)	50	120	300	1k	10k	100k
6.3 to 50		0.95	1.00	1.03	1.05	1.08	1.08
63 to 100		0.92	1.00	1.07	1.13	1.19	1.20

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.