

Product Specification

GOODARK Type

MURB1020CT

Construction : Ultra Fast Recover diode

Application : For power switch



(Manufacturer) :

Suzhou Goodark Electronics Co.,Ltd

Prepared on May. 10th, 2011

Prepared: R & D Department

Approva: QRA Department

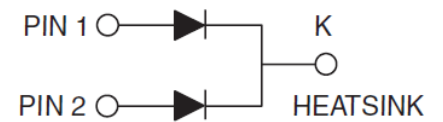



ULTRA FAST RECOVER DIODE
10 AMPERES
200 VOLTS

CONTENTS



1. Package Outline
2. Marking
3. Features& Mechanical Characteristics
4. Maximum Ratings and Electrical Characteristics
5. Rating and characteristic Curves
6. Packing Specification PACKAGING SPECIFICATION
7. Description of Box Label

1. Package Outline (TO263)

UNIT:mm

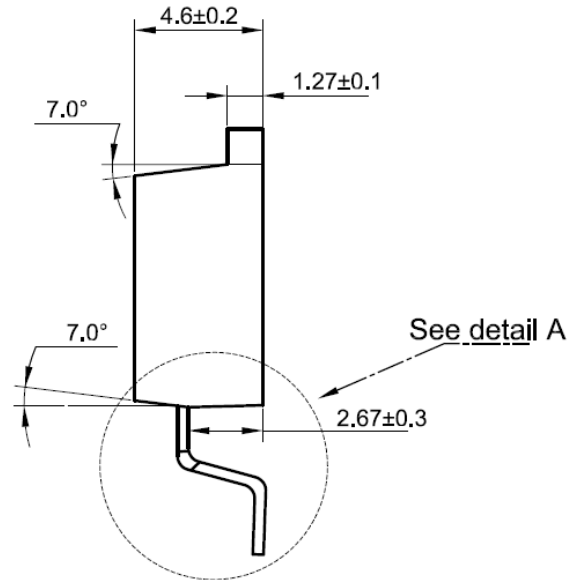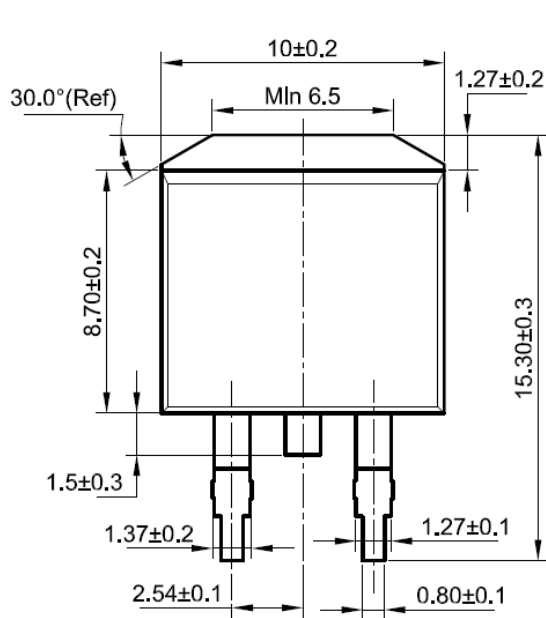


Detail A

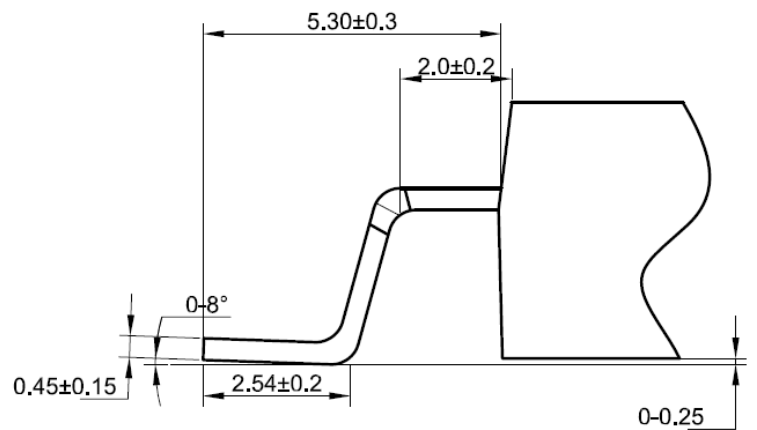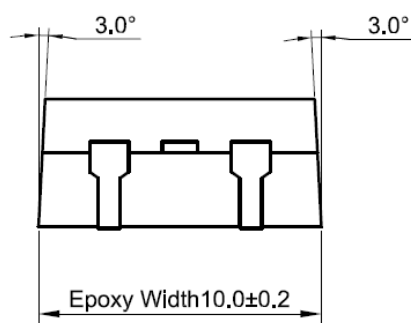


Lead Frame Material : Copper Plating: Pure Tin Plating

2.MARKING

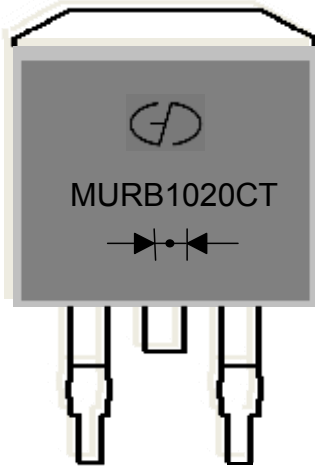

1. Part Name : MURB1020CT

2. Logo Mark: 

3. Polarity: 



3.Features& Mechanical Characteristics

Features

- Plastic package has underwriters Laboratory Flammability Classification 94V-0
- For surface mounted application
- Metal of silicon rectifier, majority carrier conduction
- Low forward voltage, high efficiency
- Guarding for over voltage protection
- For use in low voltage, high frequency inverters,
- Free wheeling, and polarity protection applications

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.4grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max.for10 sec
- Shipped 50 units per plastic tube or tape reel packing 800/reel

4.Maximum Ratings and Electrical Characteristics

MAXIMUM RATINGS and ELECTRICAL CHARACTERISTICS(TC=25°C unless otherwise moted)					
PARAMETER	TEST CONDITIONS		SYMBOL	MURB1020CT	UNIT
Maximum repetitive peak reverse voltage			VRRM	200	V
Working peak reverse voltage			VRWM	200	V
Maximum DC blocking voltage			VDC	200	V
Maximum average forward rectified current at Tc=105°C total device per diode	Per Leg Per device		IF(AV)	5 10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode			IFSM	90	A
Operating junction temperature range			TJ	—55 to+150	°C
Storage temperature range			TSTG	—55 to+150	°C
Maximum instantaneous forward voltage per leg	IF=5A IF=5A	TC=25°C TC=125°C	VF	0.92 0.83	V
Maximum reverse current per leg at working peak Reverse voltage		TJ=25°C TJ=100°C	IR	10 500	uA uA
Maximum Reverse Recover Time (If=0.5Amp, IR=1.0Amp,Irec=0.25Amp)	Trr		Trr	50	ns

Thermal Characteristics Ta=25°C unless otherwise noted

Symbol	Parameter	Max	Unit
RθJC	Thermal Resistance, Junction to Case per Leg	2.0	°C /W


Note:

1. Pulse test:300us pulse width, duty cycle=2%

5. Rating and Characteristic Curves

($T_c=25^\circ\text{C}$ Unless otherwise noted)


Typical Forward Characteristics

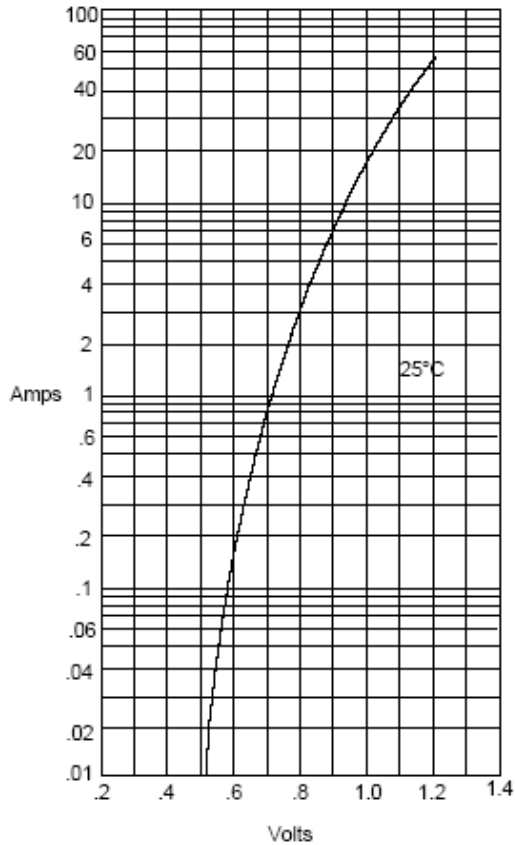

Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts


Figure 2

Typical Reverse Characteristics

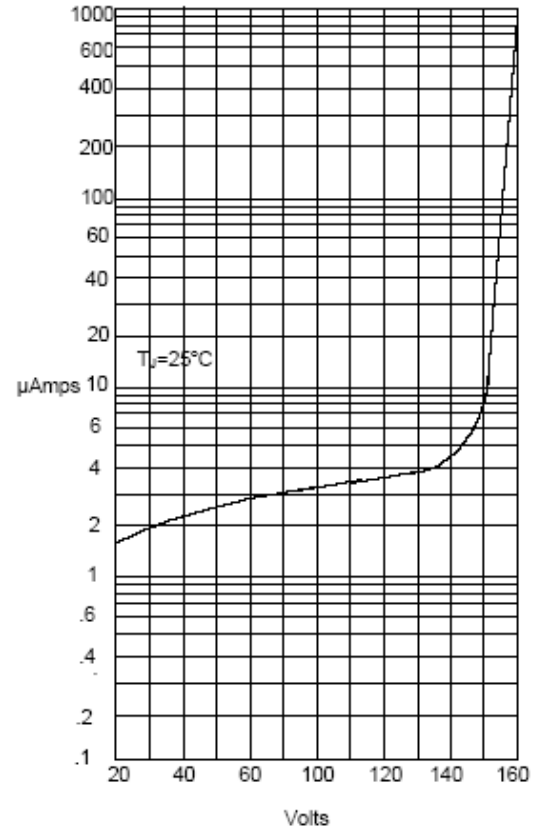

Instantaneous Reverse Leakage Current - MicroAmperes versus
Percent Of Rated Peak Reverse Voltage - Volts


Figure 3
Forward Derating Curve

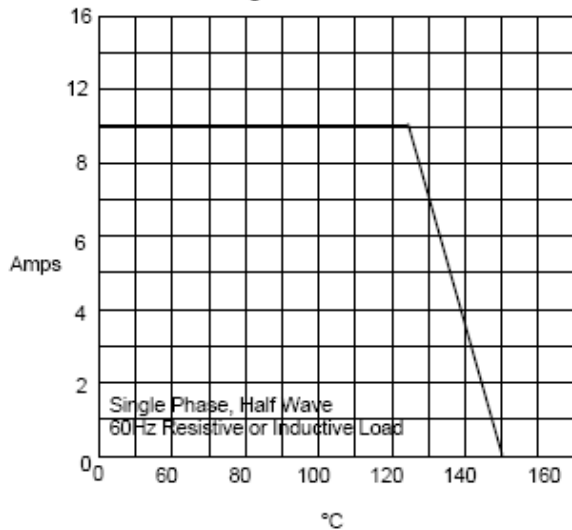

Average Forward Rectified Current - Amperes versus
Case Temperature - °C

Figure 4

Maximum Non-Repetitive Forward Surge Current

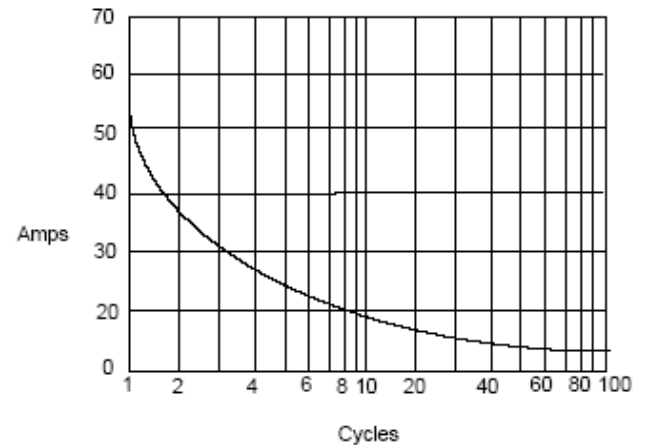

Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles


6. Packing Specification

6.1 Tube packing

	
1) Tube : 50units	2) Inner Box: 20 tube(1000units)
	
3) Outer Box: 10 inner box (10,000units)	

6.2 Tape&reel packing

Packing size:800 /reel(13' reel)

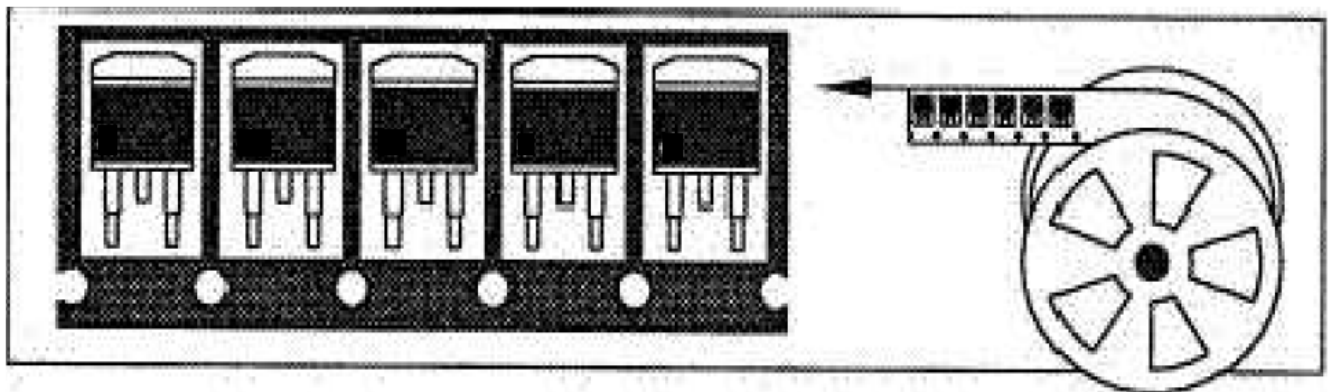

7. DESCRIPTION of BOX LABEL

	TYPE: Q'TY: P/O NO: LOT NO:
1) Inner Box Label	2) Inner Box Label
	TYPE: Q'TY: P/O NO:
3) Outer Box Label	4) Outer Box Label