


POB19-12D-9733B-2
POB19-24D-9733B-2

Features


Size: 97 x 95 x 33 mm (3.88” x 3.8” x 1.32”)
Tolerance: ± 0.5 mm
Airflow: 18.7 CFM
Lead Wire: 26 AWG (UL1061)
Impeller/Housing: PBT/ABS (Black)
Motor: Brushless DC Motor (Auto Reset Current Shut Down by Detecting Locked Motor Condition)
Bearings: Double Sealed Ball
RoHS: Lead Free
Safety Approval: UL, CSA

UL E101153 CUL LR62263

Dimensions – inches mm

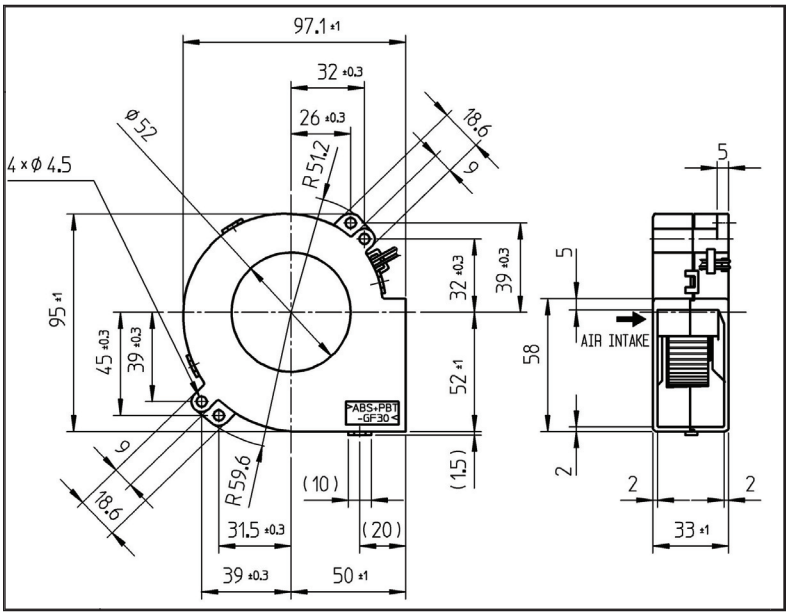

Air Flow vs. Air Pressure

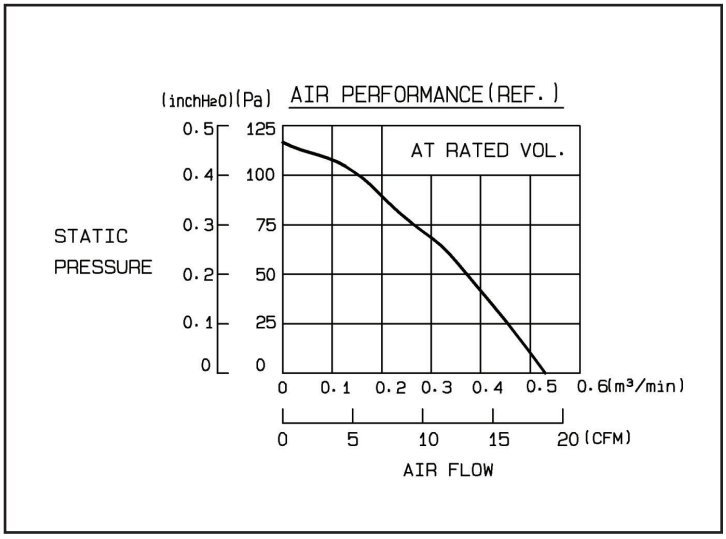

Absolute Maximum Ratings

Type	Rated Voltage (V)	Operating Frequency (Hz)	Input Power (W) (@ 60 Hz)	Max Air Flow (CFM)	Max Air Pressure (in H2))	Max Noise* (dB)	Operating Temperature (ºC)	Life Expectancy (Hr) (@ 40 ºC)
POB19-12D-9733B-2	12	50/60	12	18.7	0.47	43	-20 ~ +60	100,000
POB19-24D-9733B-2	24	50/60	12	18.7	0.47	43	-20 ~ +60	100,000

*Measured 1 m from intake