


TSQ-OSC5032





FEATURES

- Tight frequency tolerance.
- Low power standby mode.
- Reflow solder is possible.
- Lower noise and current with reduced power consumption
- Pb-free and RoHS/Green compliant

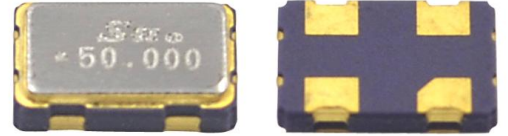


S P E C I F I C A T I O N S	
Holder Type	5.0x3.2mm SMD OSCILLATOR
Frequency Range	32.768KHz, 1.000 MHz to 125.000 MHz
Operating Temperature Range	-10°C - +60°C to -40°C - +85°C
Storage Temperature Range	-40°C - +85°C/-55°C - +125°C
Supply Voltage	5.0V or 3.3V ± 10% Std; 1.8V, 2.5V, 2.85V on custom-designed
Symmetry (Duty Cycle)	40/60 Standard
Output Load	10 TTL or 15pF HCMOS
Frequency Stability	± 20ppm to ± 50ppm
Current Consumption (15pf only)	1.000MHz - 35.999MHz=25mA max
(5.0V)	36.000MHz - 69.999MHz=60mA max
	70.000MHz - 100.000MHz=80mA max
Current Consumption (15pf only)	1.000MHz - 35.999MHz=20mA max
(1.8V 2.5V 2.85V 3.3V)	36.000MHz - 69.999MHz=40mA max
	70.000MHz - 125.000MHz=60mA max
Rise/Fall Time	5 nS max

Mechanical Dimensions: Unit: mm

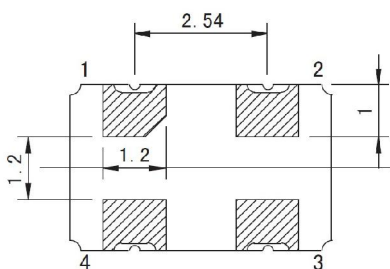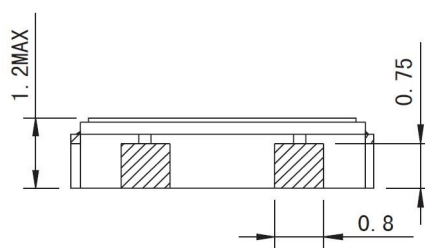

Suggested solder pad layout



PIN	FUNCTION
1	N/C or Tri-state
2	Ground
3	Output
4	Vdd

Note: Specifications are subject to change without notice. For more detail and update, please visit our website