
Anforderungsstufe 1
Performance Level 1


Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating


Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm





ohne Ansaughaube - *without hood*

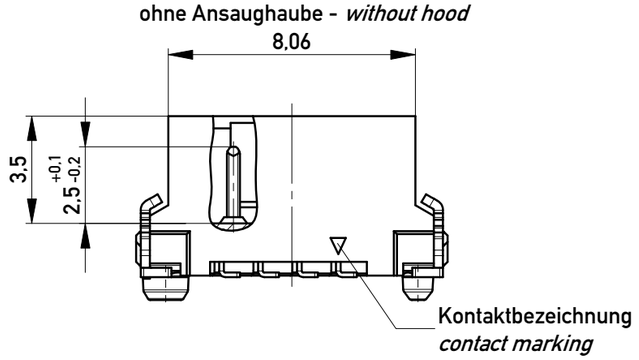

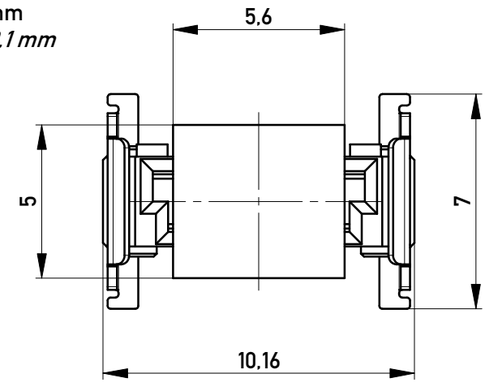


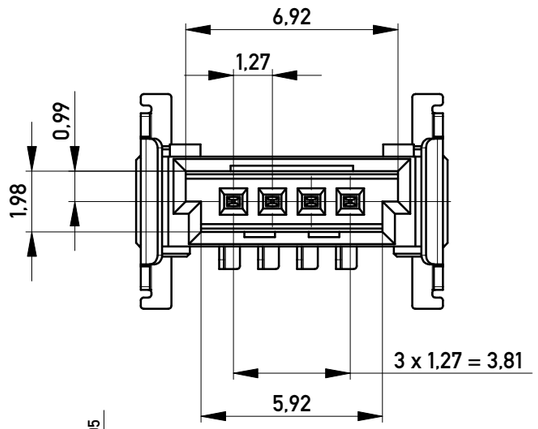

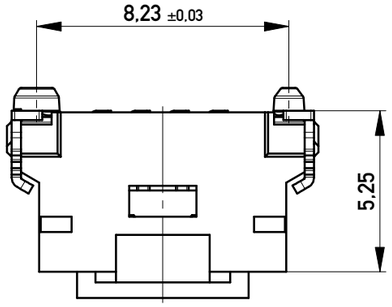


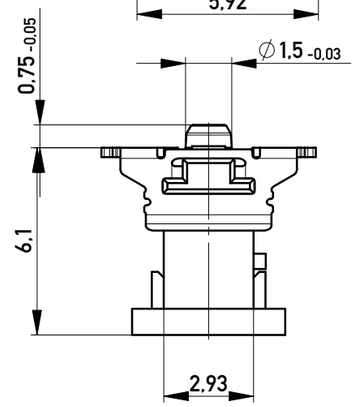


Leiterplatten-Layout für SMT
PCB-Layout for SMT

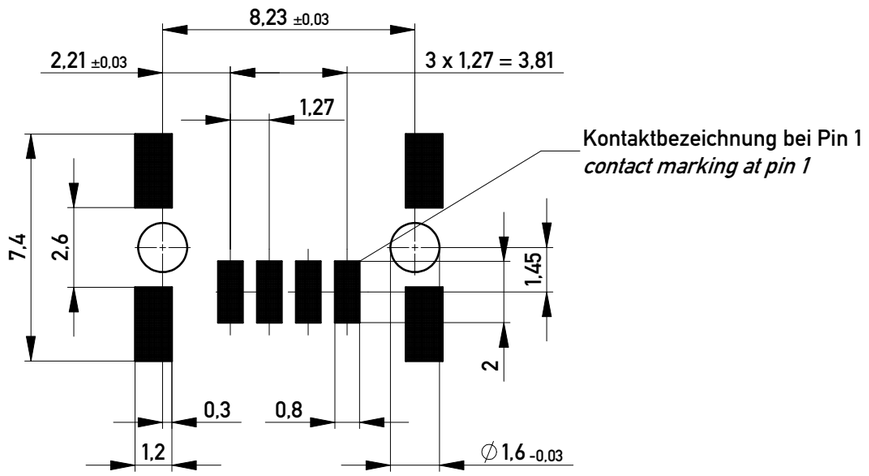

Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 650 Stück
Packaging unit: 650 pcs

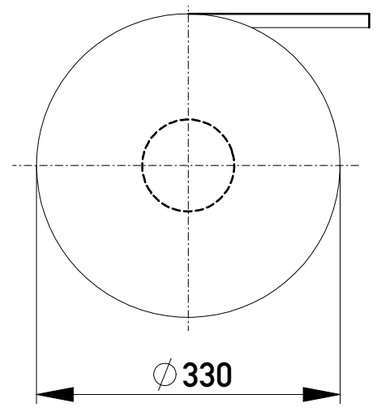

Abspulrichtung - *Reel off Direction*

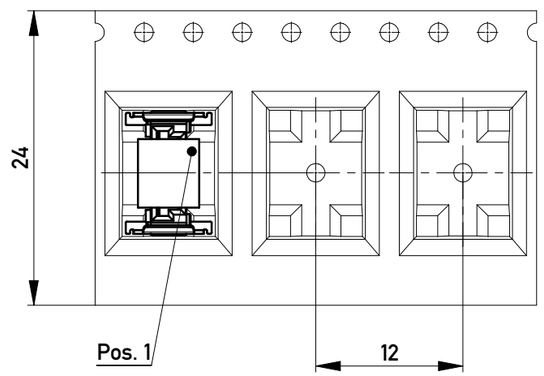

vergrösserte Lötpads
enlarged solder pads

Information:

Tolerances

All Dimensions in mm

Scale 5:1

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
M 1,27 SRC P, 4-polig BA1

www.ERNI.com

100104480001

K
A3

Index		Date	
d		15.01.2016	

Class SRCP