


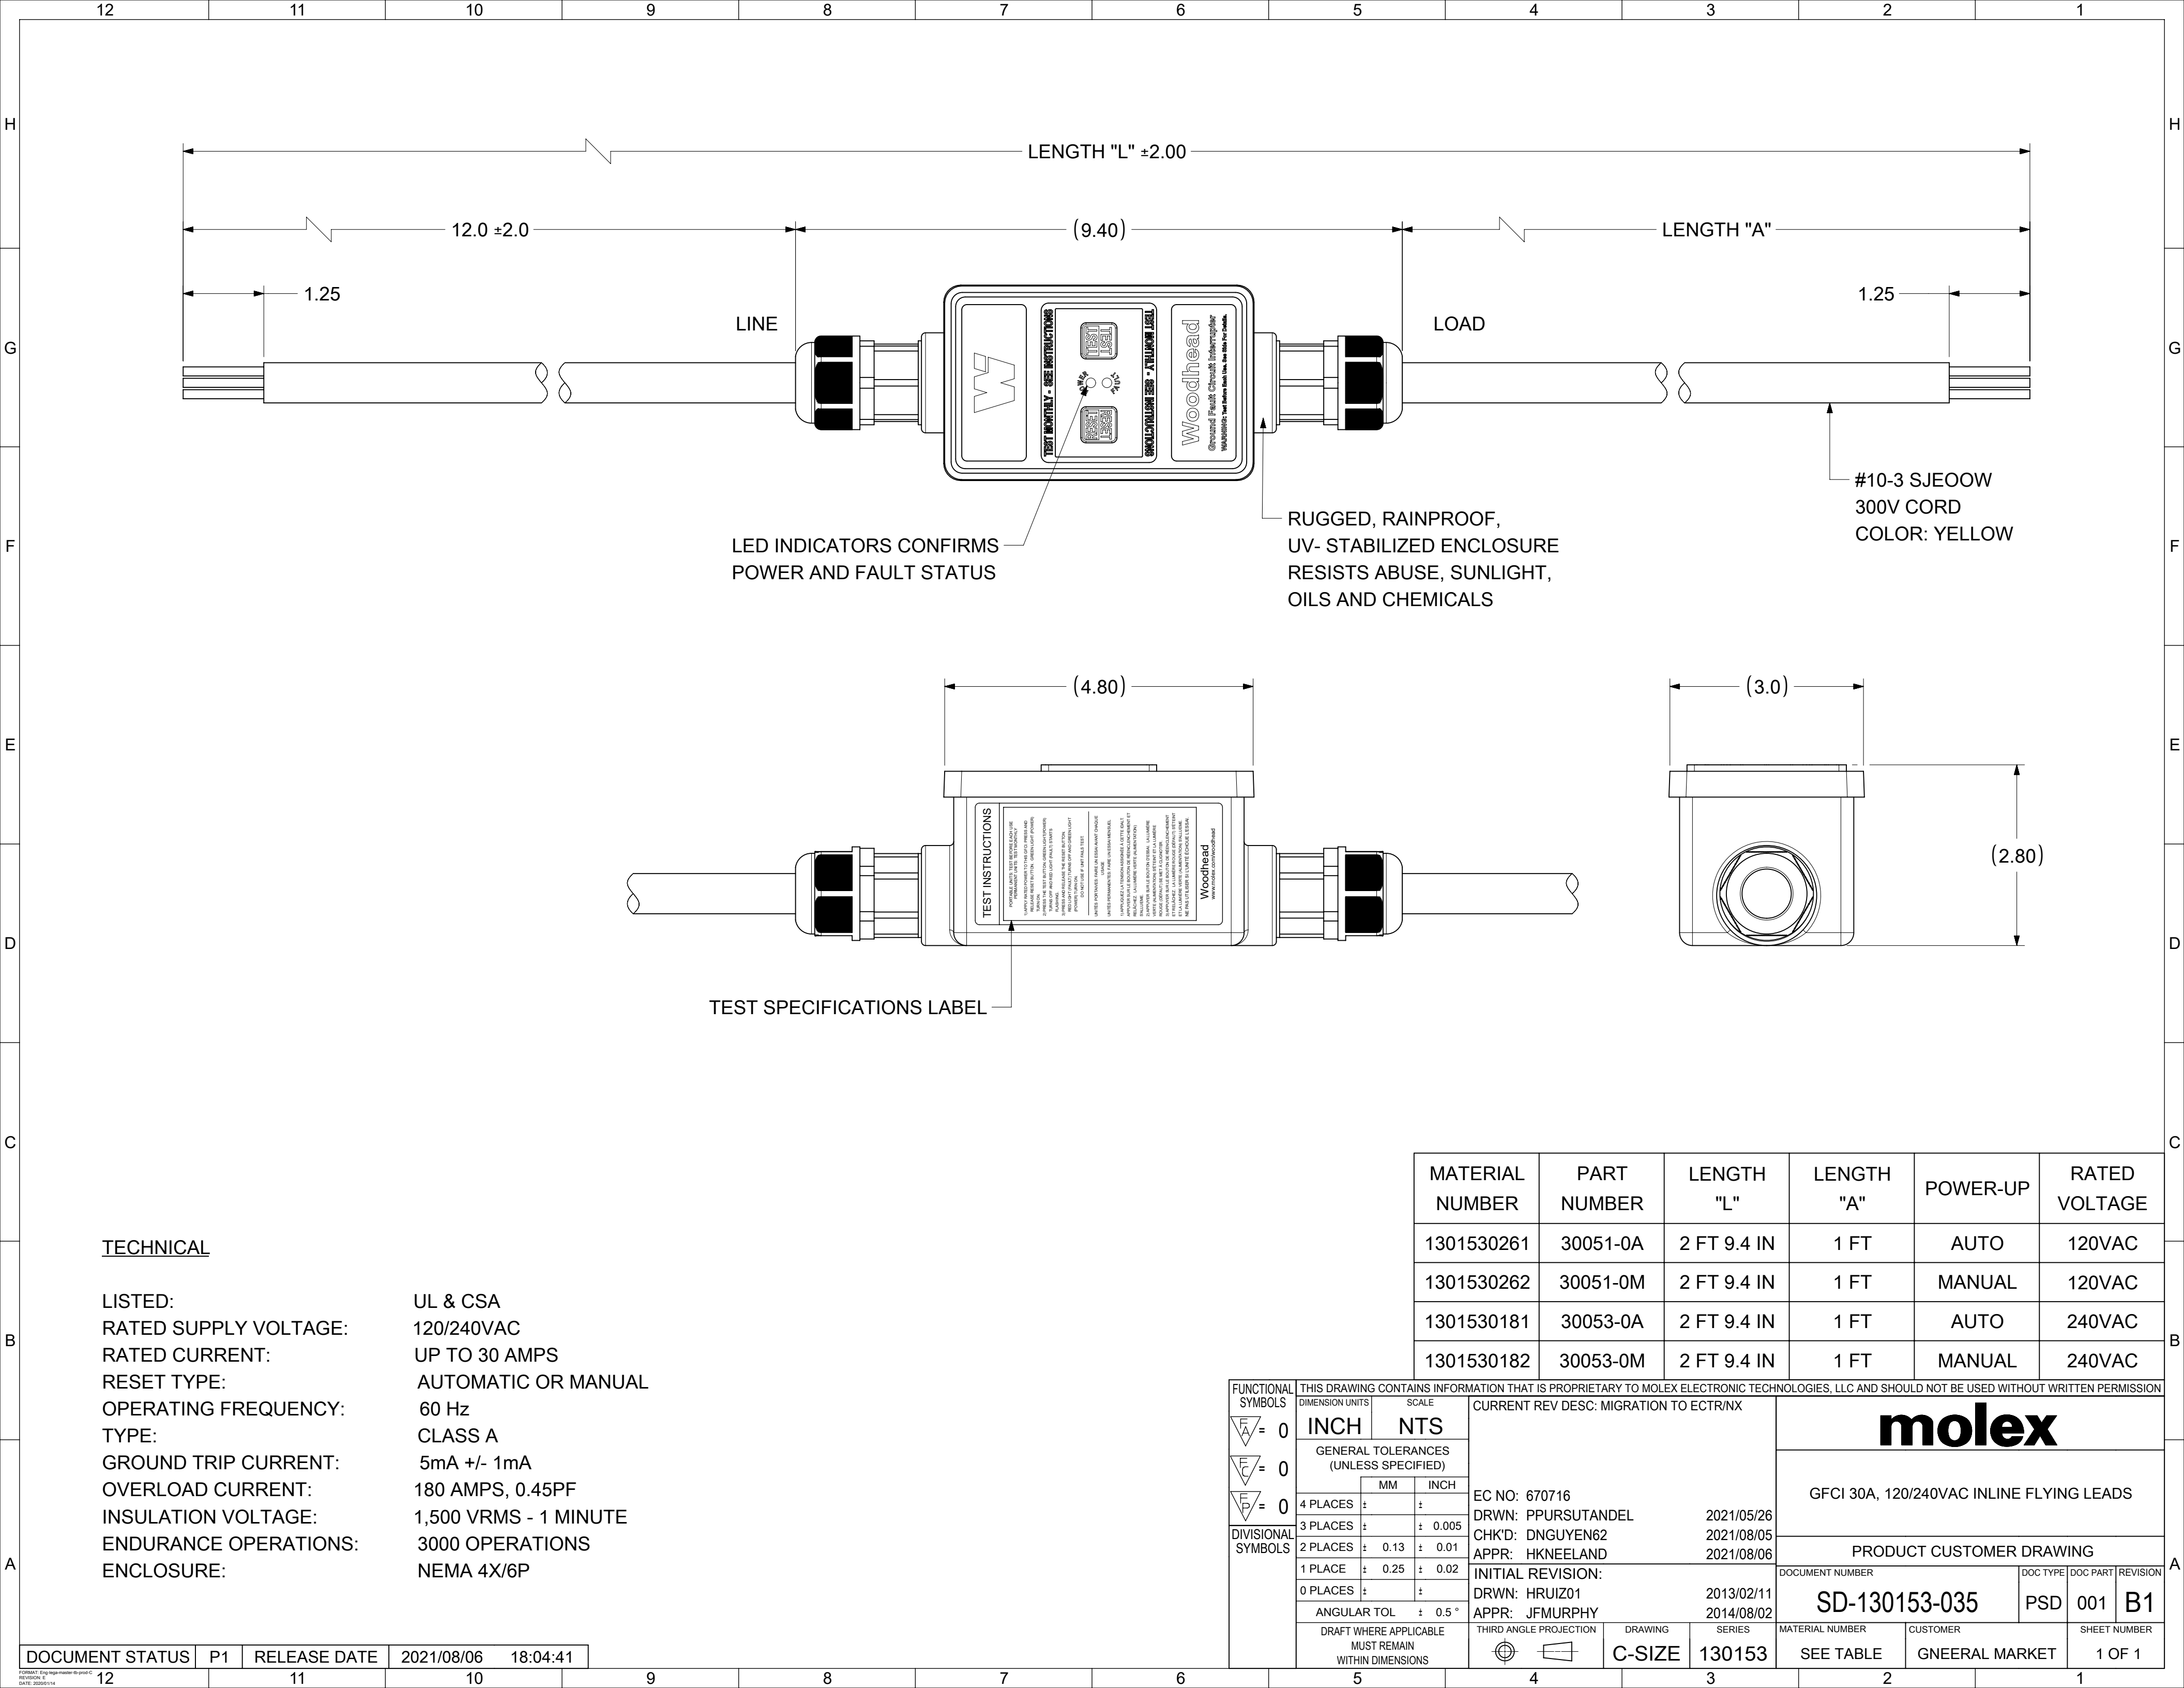

TECHNICAL

LISTED: UL & CSA
RATED SUPPLY VOLTAGE: 120/240VAC
RATED CURRENT: UP TO 30 AMPS
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 5mA +/- 1mA
OVERLOAD CURRENT: 180 AMPS, 0.45PF
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS
ENCLOSURE: NEMA 4X/6P

MATERIAL NUMBER	PART NUMBER	LENGTH "L"	LENGTH "A"	POWER-UP	RATED VOLTAGE
1301530261	30051-0A	2 FT 9.4 IN	1 FT	AUTO	120VAC
1301530262	30051-0M	2 FT 9.4 IN	1 FT	MANUAL	120VAC
1301530181	30053-0A	2 FT 9.4 IN	1 FT	AUTO	240VAC
1301530182	30053-0M	2 FT 9.4 IN	1 FT	MANUAL	240VAC

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
FUNCTIONAL SYMBOLS <div><div>F</div><div>A</div></div> = 0 <div><div>F</div><div>C</div></div> = 0 <div><div>F</div><div>P</div></div> = 0 DIVISIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATION TO ECTR/NX EC NO: 670716 DRWN: PPURSUTANDEL 2021/05/26 CHK'D: DNGUYEN62 2021/08/05 APPR: HKNEELAND 2021/08/06 INITIAL REVISION: DRWN: HRUIZ01 2013/02/11 APPR: JFMURPHY 2014/08/02				<div>molex</div> GFCI 30A, 120/240VAC INLINE FLYING LEADS						
	INCH		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
		MM		INCH											
	4 PLACES		±						±						
3 PLACES		±			± 0.005										
2 PLACES		±	0.13		± 0.01										
1 PLACE		±	0.25		± 0.02										
0 PLACES		±			±										
ANGULAR TOL		± 0.5 °													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						C-SIZE		130153		SEE TABLE		GNEERAL MARKET		1 OF 1	
										SD-130153-035		PSD		001 B1	