

AZ9405

10 AMP MINIATURE POWER RELAY

FEATURES

- 4 kV dielectric strength
- Epoxy sealed version available
- 4 mm clearance & 6 mm creepage (1 Form A)
- 3 mm clearance & 5 mm creepage (1 Form C)
- UL, CUR file E44211
- TÜV R50304647



CONTACTS

Arrangement	SPST (1 Form A) SPDT (1 Form C)
Ratings	Resistive load: Max. switched power: 150 W or 1400 VA (N.O.) 90 W or 850 VA (N.C.) Max. switched current: 10 A Max. switched voltage: 30 VDC* or 277 VAC * Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
Rated Load UL	1 Form A 10 A at 125 VAC, resistive, 85°C, 100k cycles 5 A at 277 VAC, resistive, 85°C, 100k cycles 1/10 HP at 125/250 VAC, 85°C, 100k cycles 1 Form C - normally open contacts 5 A at 277 VAC, resistive, 85°C, 100k cycles 5 A at 30 VDC, resistive, 85°C, 100k cycles 1/10 HP at 125/250 VAC, 85°C, 100k cycles 1 Form C - normally closed contacts 3 A at 277 VAC, resistive, 85°C, 100k cycles 3 A at 30 VDC, resistive, 85°C, 100k cycles
TÜV	1 Form A 10 A at 125 VAC, resistive, 85°C, 100k cycles 5 A at 277 VAC, resistive, 85°C, 100k cycles 1 Form C - normally open contacts 5 A at 277 VAC, resistive, 85°C, 100k cycles 5 A at 30 VDC, resistive, 85°C, 100k cycles 1 Form C - normally closed contacts 3 A at 277 VAC, resistive, 85°C, 100k cycles 3 A at 30 VDC, resistive, 85°C, 100k cycles
Material	Silver tin oxide
Resistance	< 100 milliohms initially (6 V, 1 A voltage drop method)

NOTES

1. All values at 20°C (68°F)
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁷ 1 x 10 ⁵ at rated load
Operate Time (max.)	10 ms at nominal coil voltage (standard) 15 ms at nominal coil voltage (sensitive)
Release Time (max.)	5 ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	4000 Vrms coil to contact 1000 Vrms between open contacts
Insulation Resistance	1000 megohms min. at 20°C, 500 VDC, 50% RH
Dropout	Greater than 10% of nominal coil voltage
Ambient Temperature Operating	At nominal coil voltage -40°C (-40°F) to 85°C (185°F)
Vibration	1.5 mm DA at 10–55 Hz
Shock	10 g operating, 100 g damage
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	7 grams

COIL

Power	
At Pickup Voltage (typical)	196 mW (standard coil) 113 mW (sensitive coil)
Max. Continuous Dissipation	676 mW at 20°C (68°F) ambient
Temperature Rise (at nominal voltage)	42°C (76°F) standard coil 24°C (44°F) sensitive coil
Temperature	Max. 130°C (266°F)

ZETTLER electronics GmbH - A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0 office@ZETTLERelectronics.com
fax: +49 89 800 97-200 www.ZETTLERelectronics.com

This product specification to be used only together with the application notes
which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>

2015-01-16

AZ9405


RELAY ORDERING DATA

STANDARD COIL					
COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance Ohm $\pm 10\%$	Form A (SPST)	Form C (SPDT)
3	2.1	3.9	22.5	AZ9405-1A-3DF	AZ9405-1C-3DF
5	3.5	6.5	63	AZ9405-1A-5DF	AZ9405-1C-5DF
6	4.2	7.8	90	AZ9405-1A-6DF	AZ9405-1C-6DF
9	6.3	11.7	202.5	AZ9405-1A-9DF	AZ9405-1C-9DF
12	8.4	15.6	360	AZ9405-1A-12DF	AZ9405-1C-12DF
18	12.6	23.4	810	AZ9405-1A-18DF	AZ9405-1C-18DF
24	16.8	31.2	1,440	AZ9405-1A-24DF	AZ9405-1C-24DF
48	33.6	62.4	5,760	AZ9405-1A-48DF	AZ9405-1C-48DF

SENSITIVE COIL					
COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance Ohm $\pm 10\%$	Form A (SPST)	Form C (SPDT)
3	2.25	3.9	45	AZ9405-1A-3DSF	AZ9405-1C-3DSF
5	3.75	6.5	125	AZ9405-1A-5DSF	AZ9405-1C-5DSF
6	4.50	7.8	180	AZ9405-1A-6DSF	AZ9405-1C-6DSF
9	6.75	11.7	400	AZ9405-1A-9DSF	AZ9405-1C-9DSF
12	9.00	15.6	720	AZ9405-1A-12DSF	AZ9405-1C-12DSF
18	13.50	23.4	1,620	AZ9405-1A-18DSF	AZ9405-1C-18DSF
24	18.00	31.2	2,800	AZ9405-1A-24DSF	AZ9405-1C-24DSF

* Add suffix "E" before "F" at the end of order number for sealed version.

MECHANICAL DATA

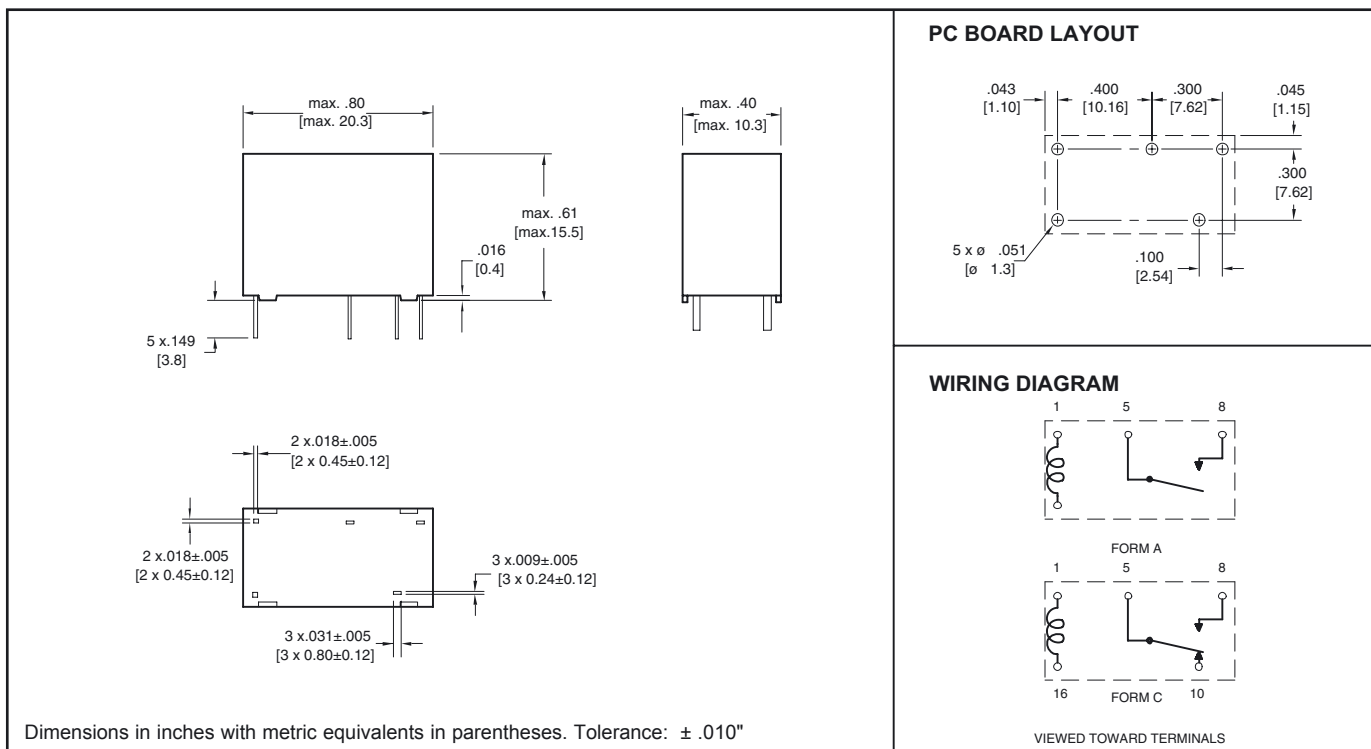

ZETTLER electronics GmbH - A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0

office@ZETTLERelectronics.com

fax: +49 89 800 97-200

www.ZETTLERelectronics.com

This product specification to be used only together with the application notes which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>

2015-01-16