

isc Silicon PNP Power Transistor

BD227/229/231

DESCRIPTION

- DC Current Gain-
: $h_{FE}=40(\text{Min})@I_C=-0.15\text{A}$
- Complement to Type BD226/228/230

APPLICATIONS



- Designed for use in driver stages in television circuits.

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}\text{C}$)

SYMBOL	PARAMETER		VALUE	UNIT
V_{CBO}	Collector-Base Voltage	BD227	-45	V
		BD229	-60	
		BD231	-100	
V_{CEO}	Collector-Emitter Voltage	BD227	-45	V
		BD229	-60	
		BD231	-80	
V_{CER}	Collector-Emitter Voltage($R_{BE}=1k\Omega$)	BD227	-45	V
		BD229	-60	
		BD231	-100	
V_{EBO}	Emitter-Base Voltage		-5	V
I_C	Collector Current-Continuous		-1.5	A
I_{CM}	Collector Current-Peak		-3.0	A
P_C	Collector Power Dissipation @ $T_C\leq 62^{\circ}\text{C}$		12.5	W
T_J	Junction Temperature		150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature Range		-65~150	$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance,Junction to Case	7	$^{\circ}\text{C/W}$
$R_{th\ j-a}$	Thermal Resistance,Junction to Ambient	100	$^{\circ}\text{C/W}$

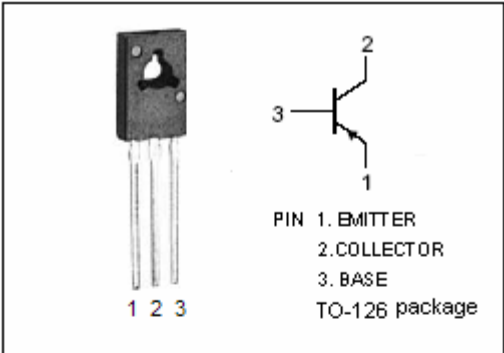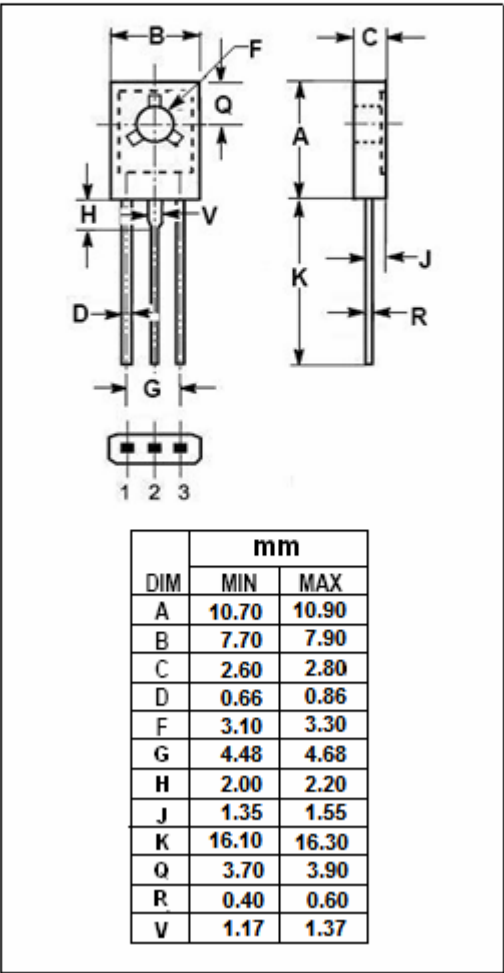

isc Silicon PNP Power Transistor

BD227/229/231

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	BD227	$I_C = -100\text{mA}$; $I_B = 0$	-45			V
		BD229		-60			
		BD231		-80			
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage		$I_C = -1\text{A}$; $I_B = -0.1\text{A}$			-0.8	V
$V_{BE(on)}$	Base-Emitter On Voltage		$I_C = -1\text{A}$; $V_{CE} = -2\text{V}$			-1.3	V
I_{CBO}	Collector Cutoff Current		$V_{CB} = -30\text{V}$; $I_E = 0$ $V_{CB} = -30\text{V}$; $I_E = 0$, $T_C = 125^{\circ}\text{C}$			-0.1 -10	μA
I_{EBO}	Emitter Cutoff Current		$V_{EB} = -5\text{V}$; $I_C = 0$			-10	μA
h_{FE-1}	DC Current Gain		$I_C = -5\text{mA}$; $V_{CE} = -2\text{V}$	25			
h_{FE-2}	DC Current Gain		$I_C = -1\text{A}$; $V_{CE} = -2\text{V}$	25			
h_{FE-3}	DC Current Gain		$I_C = -0.15\text{A}$; $V_{CE} = -2\text{V}$	40		250	
f_T	Current-Gain—Bandwidth Product		$I_C = -50\text{mA}$; $V_{CE} = -5\text{V}$		50		MHz