


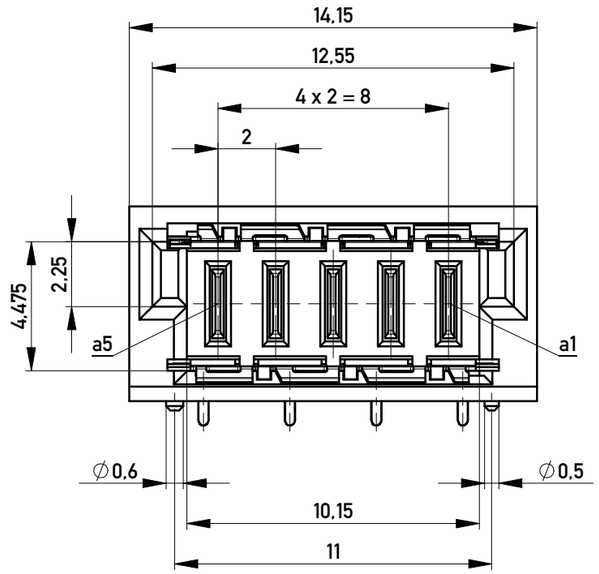


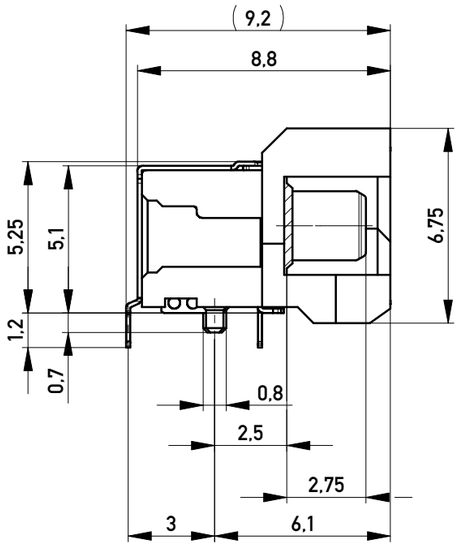



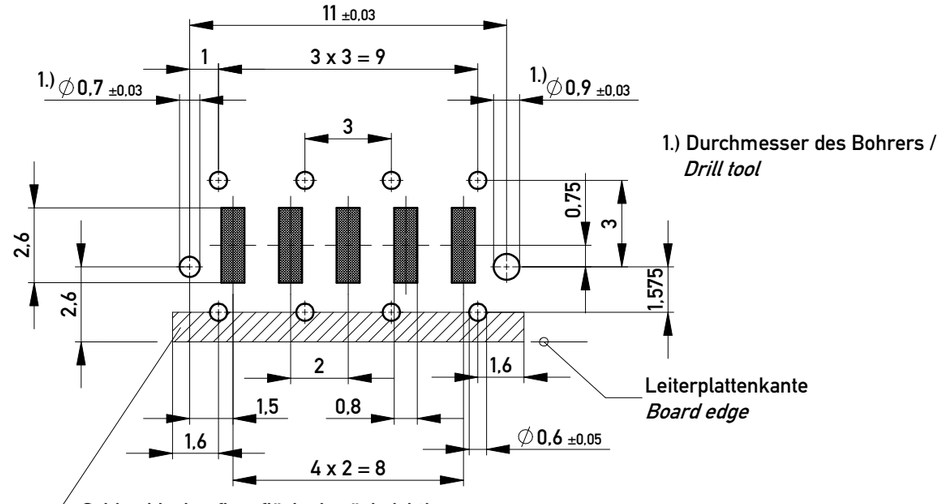

Verpackt in Gurtverpackung
*Tape on Reel Packaging*
Verpackungseinheit: 400 Stück
*Packaging unit: 400 pcs*

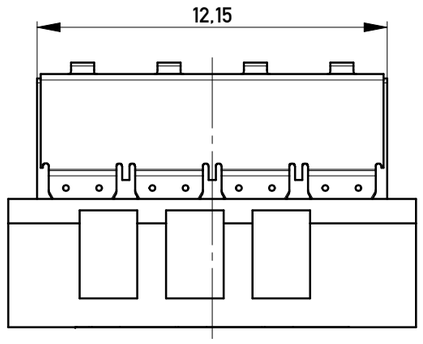


Abspulrichtung - *Reel off Direction*



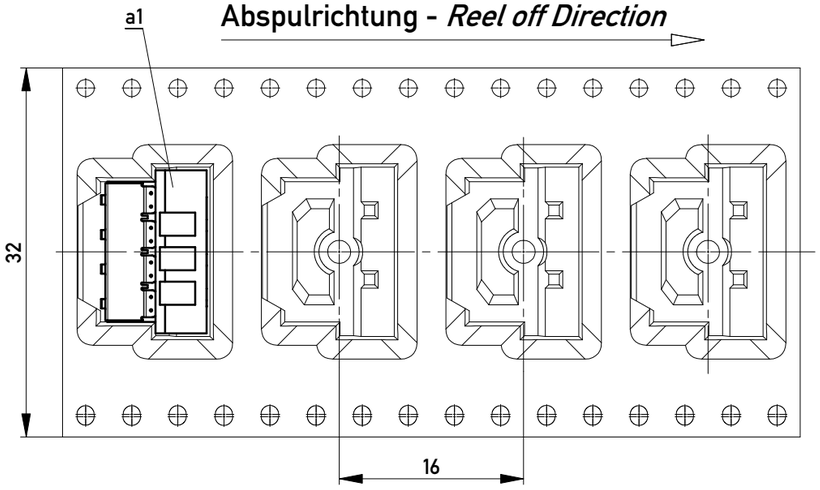
Leiterplatten-Layout Vorschlag / *PCB-Layout Proposal*




1.) Durchmesser des Bohrers /
*Drill tool*

Leiterplattenkante
*Board edge*

Schirmblechauflagefläche berücksichtigen,
keine Durchkontaktierungen oder Leitungen möglich!
*Consider shielding contact area, no via´s or traces possible!*

Anforderungsstufe 1
*Performance Level 1*

Kontaktbereich vergoldet
*Mating Area gold plating*

Anschlussbereich verzinnt 4-6 µm
*Terminal Area 4-6 µm tin plating*

Koplanarität der Anschlüsse ≤ 0,1 mm
*Coplanarity Area of Termination ≤ 0,1 mm*

# BlindMate SMD/THR

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

| | | | |
|---|---|---|---|
| Information: | Tolerances: All Dimensions in mm | Scale 5:1 | |
| All rights reserved.<br>Only for Information.<br>To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using. | Subject to modification without prior notice.<br>Drawing will not be updated. | Designation<br>MSpeed Messerl. 90° PM<br>*MSpeed male 90° PM* | |
| | ERNI www.ERNI.com | 100500100004 | K |
| c / 16.04.2013 | | | A3 |
| Index / Date | | Class MSPPM | |