


DATA SHEET



BY9300 series

Fast high-voltage soft-recovery
controlled avalanche rectifiers

Product specification
Supersedes data of 1998 Jul 29

2000 Jan 10

Fast high-voltage soft-recovery controlled avalanche rectifiers

BY9300 series

FEATURES

- Plastic package
- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- 40% overvoltage allowed during 5 seconds
- Guaranteed avalanche energy absorption capability
- Very low reverse recovery time
- Soft-recovery switching characteristics
- Compact construction.

APPLICATIONS


- For colour television and monitors up to 32 kHz (indication)
- High-voltage applications for:
 - Multipliers
 - Diode-split-transformers (FBTs).

DESCRIPTION

Plastic package, using glass passivation and a high temperature alloyed construction.

This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

The package should be used in an insulating medium such as resin, oil or SF6 gas.

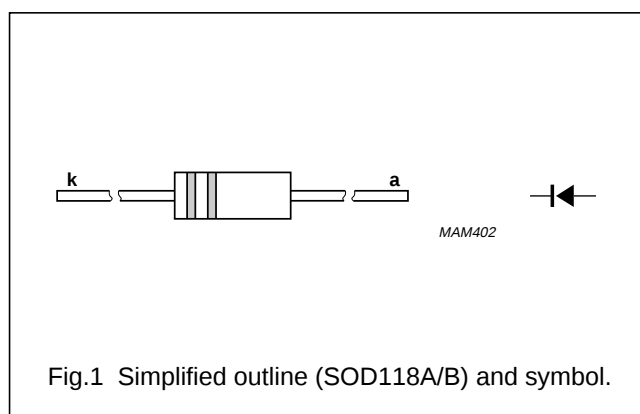

MARKING

Cathode band colour codes.

TYPE NUMBER	PACKAGE CODE	OUTER BAND	INNER BAND
BY9304	SOD118A	white	–
BY9306	SOD118A	white	green
BY9308	SOD118A	white	red
BY9310	SOD118B	white	violet
BY9312	SOD118B	white	orange
BY9314	SOD118B	white	lilac
BY9316	SOD118B	white	grey
BY9318	SOD118B	white	brown

Fast high-voltage soft-recovery controlled avalanche rectifiers

BY9300 series

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{RRM1}	repetitive peak reverse voltage				
	BY9304		—	4	kV
	BY9306		—	6	kV
	BY9308		—	8	kV
	BY9310		—	10	kV
	BY9312		—	12	kV
	BY9314		—	14	kV
	BY9316		—	16	kV
	BY9318		—	18	kV
V_{RRM2}	repetitive peak reverse voltage	max. 5 seconds			
	BY9304		—	5.6	kV
	BY9306		—	8.4	kV
	BY9308		—	11.2	kV
	BY9310		—	14.0	kV
	BY9312		—	16.8	kV
	BY9314		—	19.6	kV
	BY9316		—	22.4	kV
	BY9318		—	25.2	kV
V_{RSM}	non-repetitive peak reverse voltage				
	BY9304		—	5.6	kV
	BY9306		—	8.4	kV
	BY9308		—	11.2	kV
	BY9310		—	14.0	kV
	BY9312		—	16.8	kV
	BY9314		—	19.6	kV
	BY9316		—	22.4	kV
	BY9318		—	25.2	kV
I_{FSM}	non-repetitive peak forward current	$t = 10$ ms half sinewave; $T_j = T_{j\max}$ prior to surge	—	0.5	A
$I_{F(AV)}$	average forward current	averaged over any 20 ms period			
	BY9304		—	20	mA
	BY9306		—	10	mA
	BY9308		—	5	mA
	BY9310		—	5	mA
	BY9312		—	5	mA
	BY9314		—	5	mA
	BY9316		—	5	mA
	BY9318		—	5	mA
I_{FRM}	repetitive peak forward current	note 1	—	500	mA

Fast high-voltage soft-recovery controlled avalanche rectifiers

BY9300 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
T_{stg}	storage temperature		−65	+175	°C
T_j	junction temperature				
	BY9304		−65	+160	°C
	BY9306		−65	+160	°C
	BY9308		−65	+155	°C
	BY9310		−65	+150	°C
	BY9312		−65	+145	°C
	BY9314		−65	+140	°C
	BY9316		−65	+140	°C
	BY9318		−65	+135	°C

Note

1. Withstands peak currents during flash-over in a picture tube.

ELECTRICAL CHARACTERISTICS





$T_j = 25\text{ °C}$; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
V_F	forward voltage	$I_F = 10\text{ mA}$			
	BY9304		—	10	V
	BY9306		—	14	V
	BY9308		—	20	V
	BY9310		—	24	V
	BY9312		—	30	V
	BY9314		—	34	V
	BY9316		—	40	V
	BY9318		—	44	V
I_R	reverse current	$V_R = V_{RRM1}$	—	1	μA
		$V_R = V_{RRM1}$; $T_j = 120\text{ °C}$	—	3	μA
Q_r	recovery charge	when switched from $I_F = 100\text{ mA}$ to $V_R \geq 100\text{ V}$ and $di_F/dt = -200\text{ mA}/\mu\text{s}$	0.7	—	nC
t_{rr}	reverse recovery time	when switched from $I_F = 2\text{ mA}$ to $I_R = 4\text{ mA}$; measured at $I_R = 1\text{ mA}$	—	80	ns
C_d	diode capacitance	$V_R = 0$; $f = 1\text{ MHz}$			
	BY9304		1.20	—	pF
	BY9306		0.80	—	pF
	BY9308		0.60	—	pF
	BY9310		0.50	—	pF
	BY9312		0.40	—	pF
	BY9314		0.35	—	pF
	BY9316		0.30	—	pF
	BY9318		0.25	—	pF

Fast high-voltage soft-recovery
controlled avalanche rectifiers





BY9300 series

GRAPHICAL DATA

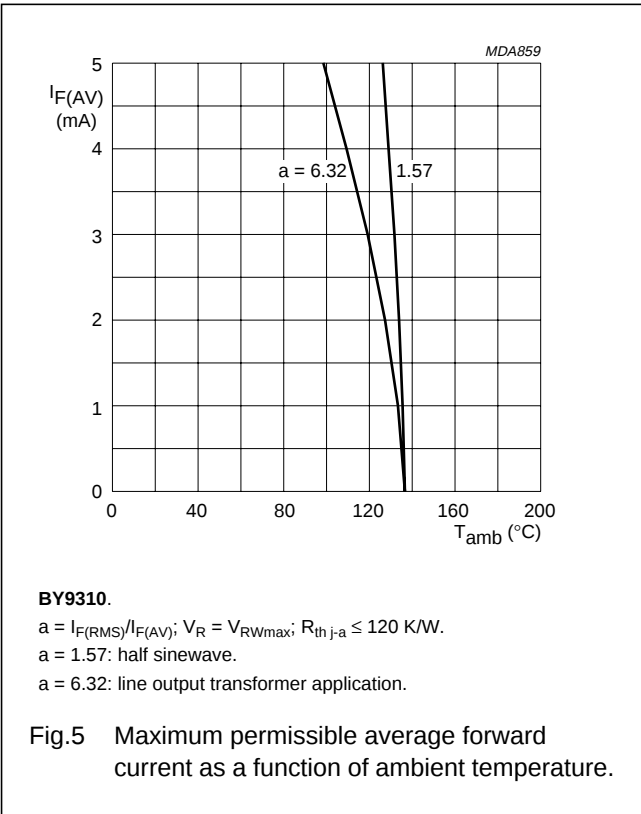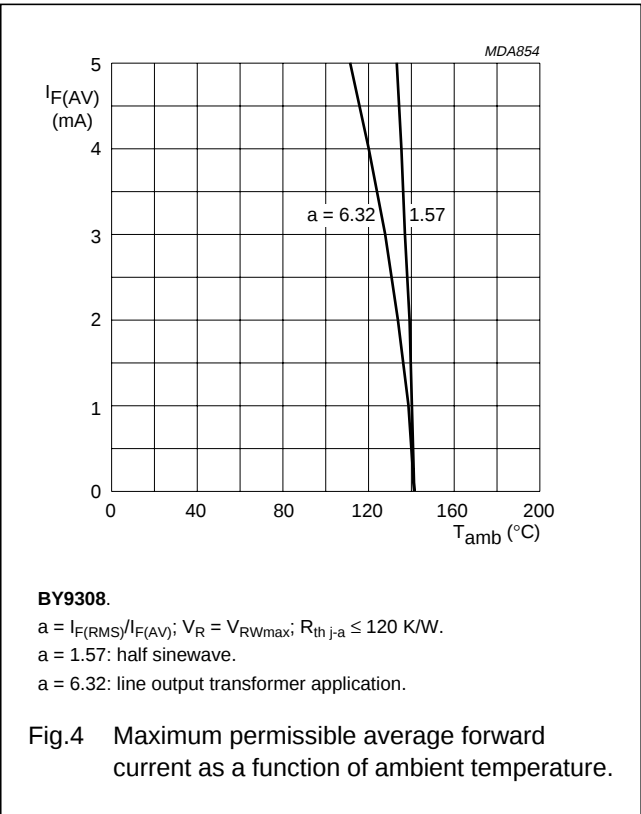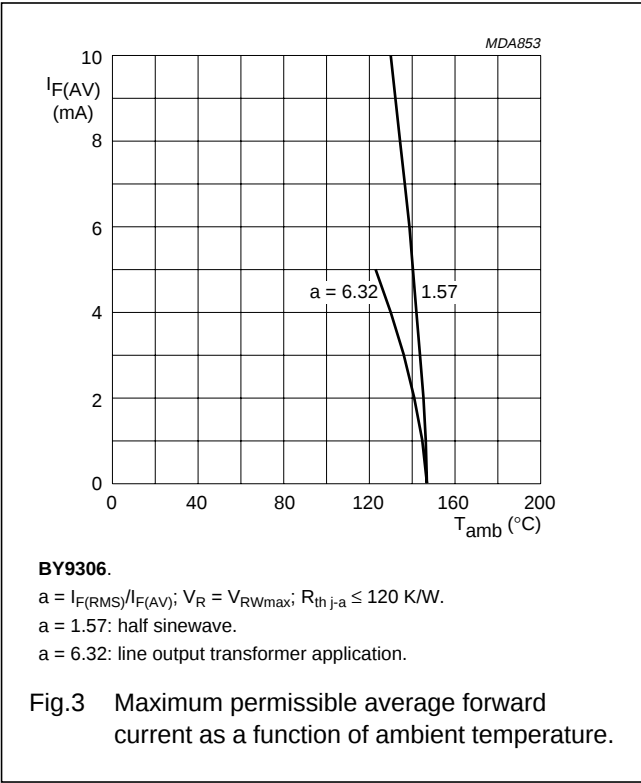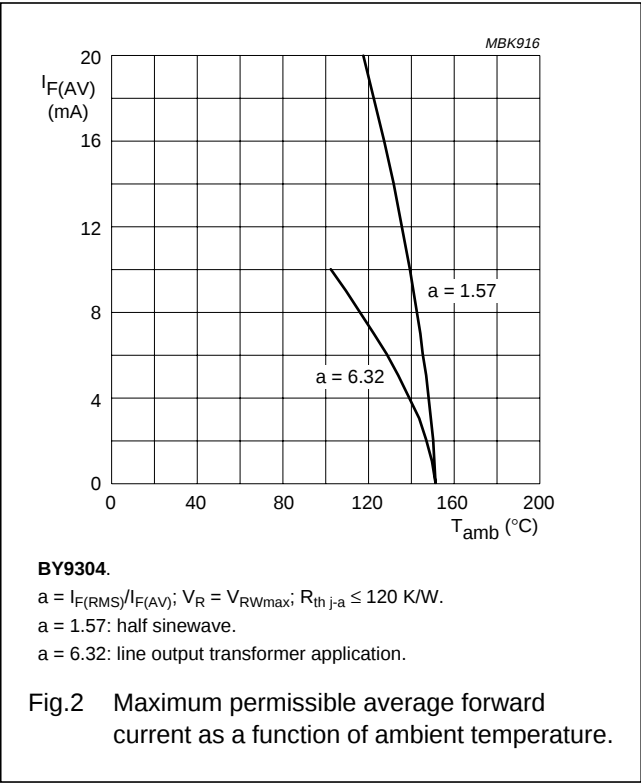


Fast high-voltage soft-recovery
controlled avalanche rectifiers

BY9300 series

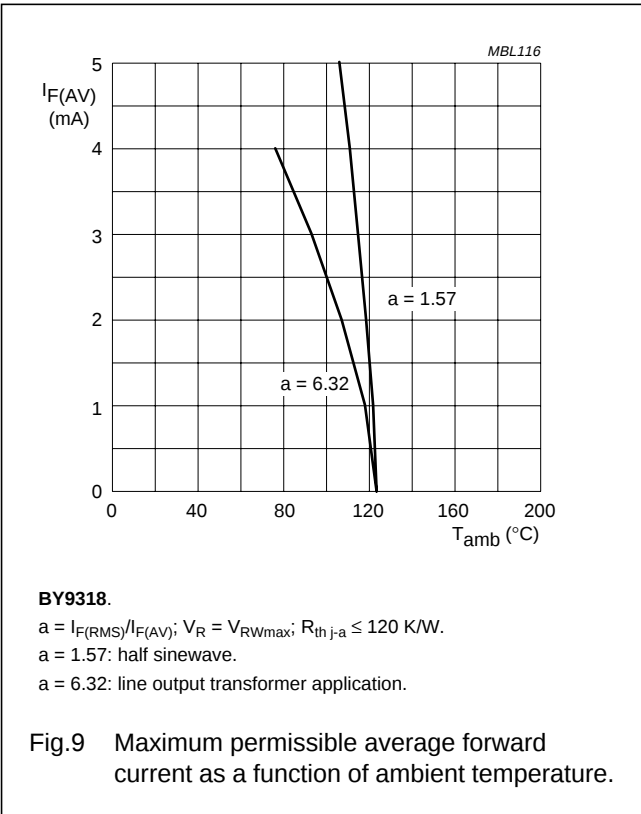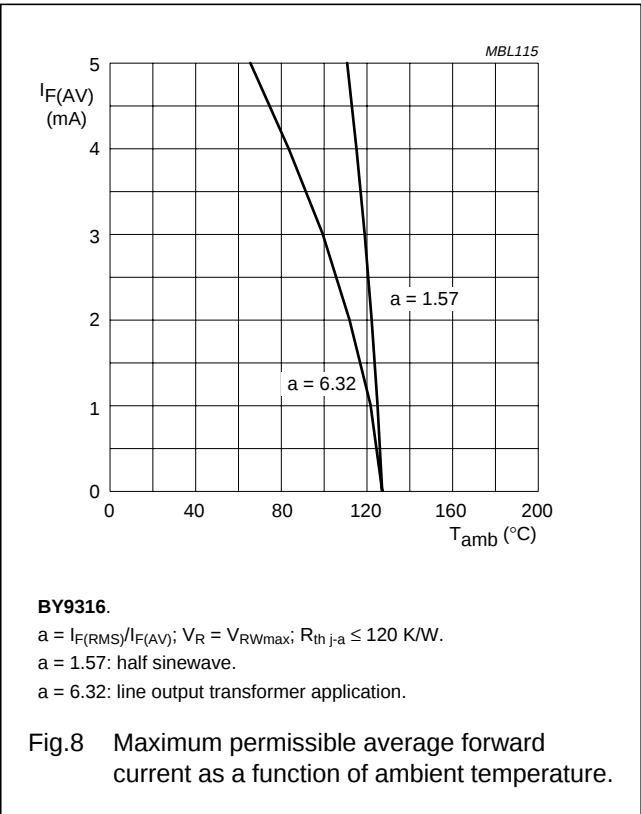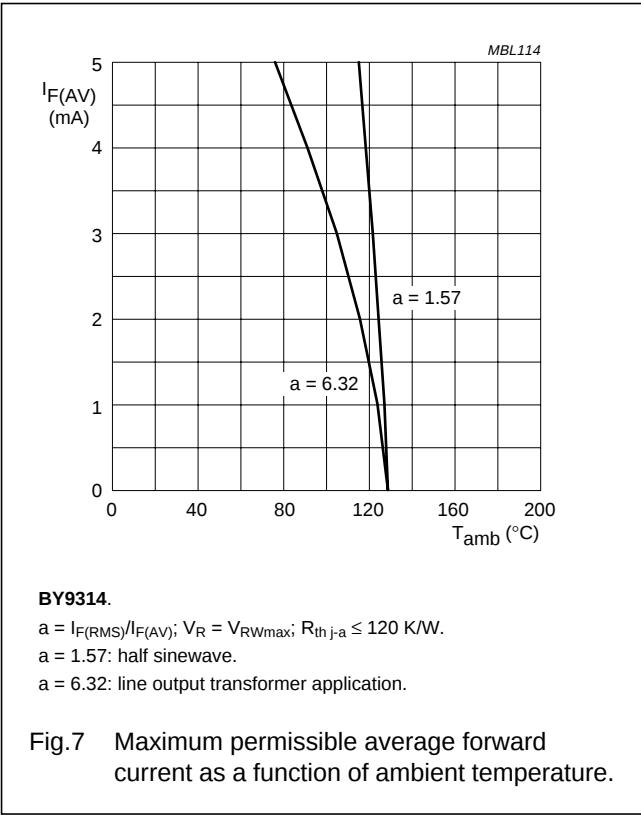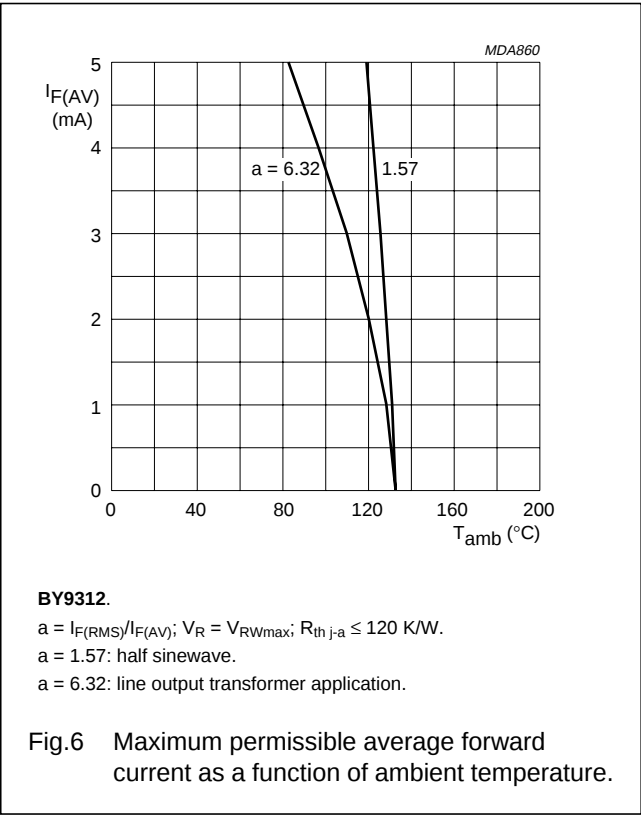

Fast high-voltage soft-recovery controlled avalanche rectifiers

BY9300 series

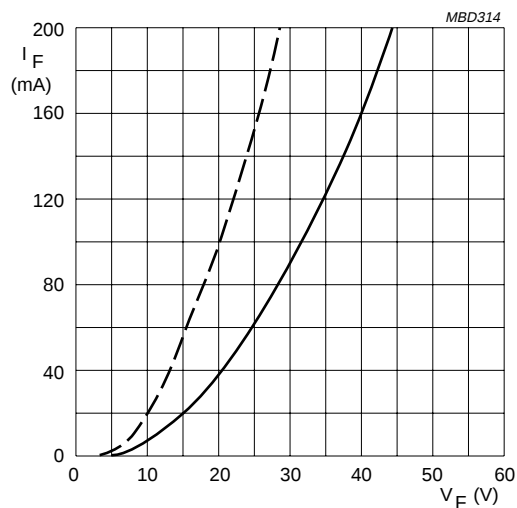


BY9304.

Dotted line: $T_J = 120\text{ }^{\circ}\text{C}$.

Solid line: $T_J = 25\text{ }^{\circ}\text{C}$.

Fig.10 Forward current as a function of maximum forward voltage.

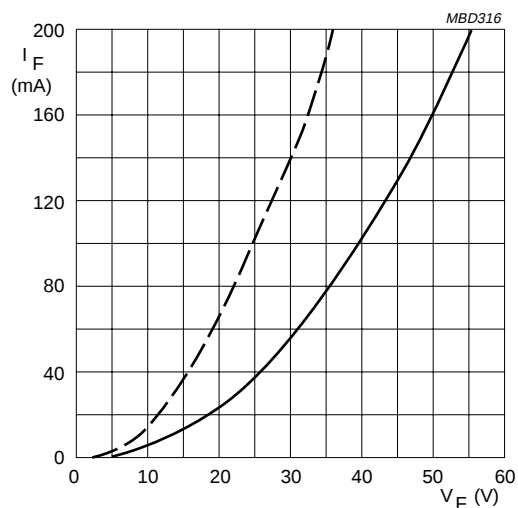


BY9306.

Dotted line: $T_J = 120\text{ }^{\circ}\text{C}$.

Solid line: $T_J = 25\text{ }^{\circ}\text{C}$.

Fig.11 Forward current as a function of maximum forward voltage.

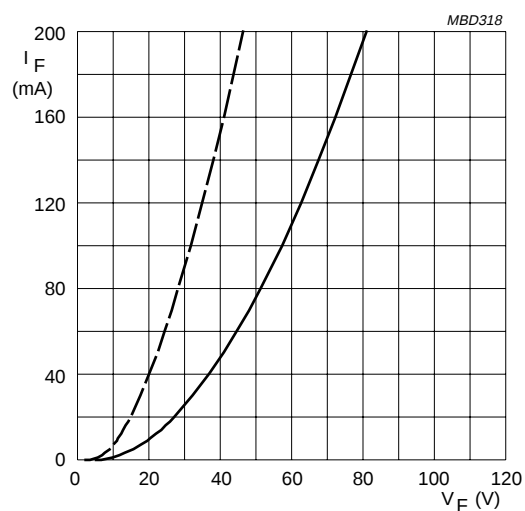


BY9308.

Dotted line: $T_J = 120\text{ }^{\circ}\text{C}$.

Solid line: $T_J = 25\text{ }^{\circ}\text{C}$.

Fig.12 Forward current as a function of maximum forward voltage.

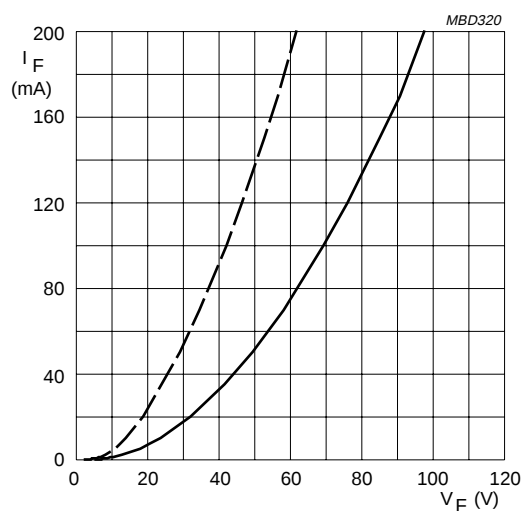

BY9310.


Dotted line: $T_J = 120\text{ }^{\circ}\text{C}$.

Solid line: $T_J = 25\text{ }^{\circ}\text{C}$.

Fig.13 Forward current as a function of maximum forward voltage.


Fast high-voltage soft-recovery
controlled avalanche rectifiers

BY9300 series

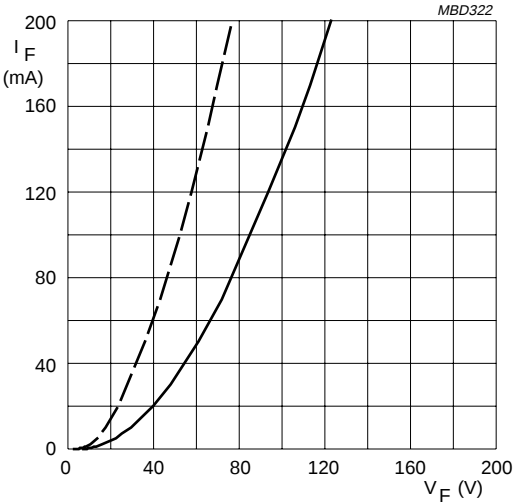


BY9312.
Dotted line: $T_J = 120\text{ }^{\circ}\text{C}$.
Solid line: $T_J = 25\text{ }^{\circ}\text{C}$.

Fig.14 Forward current as a function of maximum forward voltage.

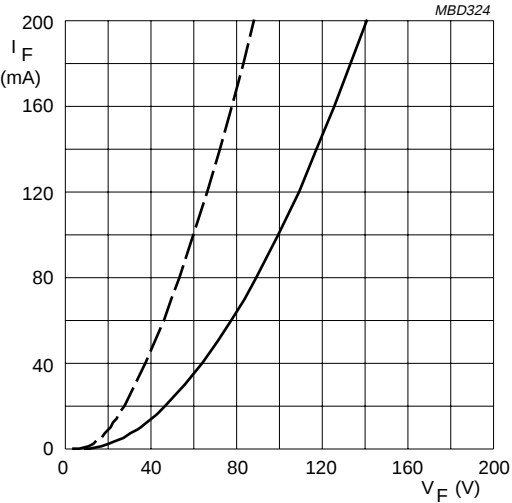


BY9314.
Dotted line: $T_J = 120\text{ }^{\circ}\text{C}$.
Solid line: $T_J = 25\text{ }^{\circ}\text{C}$.

Fig.15 Forward current as a function of maximum forward voltage.

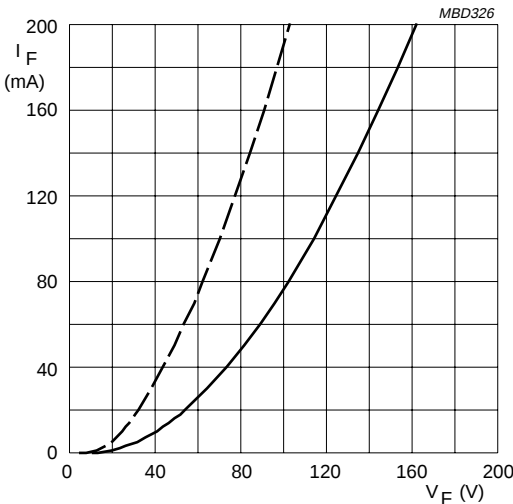

BY9316.
Dotted line: $T_J = 120\text{ }^{\circ}\text{C}$.
Solid line: $T_J = 25\text{ }^{\circ}\text{C}$.

Fig.16 Forward current as a function of maximum forward voltage.

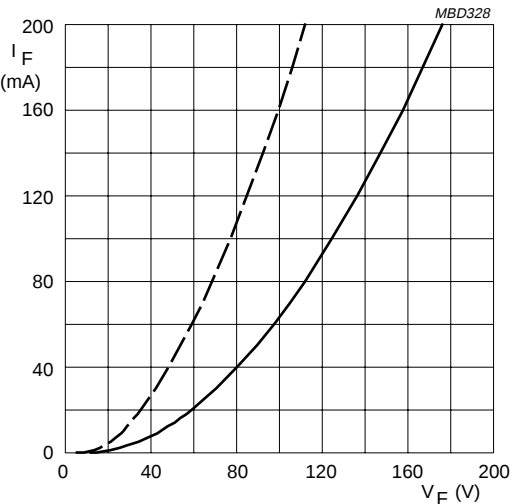

BY9318.
Dotted line: $T_J = 120\text{ }^{\circ}\text{C}$.
Solid line: $T_J = 25\text{ }^{\circ}\text{C}$.

Fig.17 Forward current as a function of maximum forward voltage.


Fast high-voltage soft-recovery
controlled avalanche rectifiers

BY9300 series

PACKAGE OUTLINES

Hermetically sealed plastic package; axial leaded; 2 leads

SOD118A

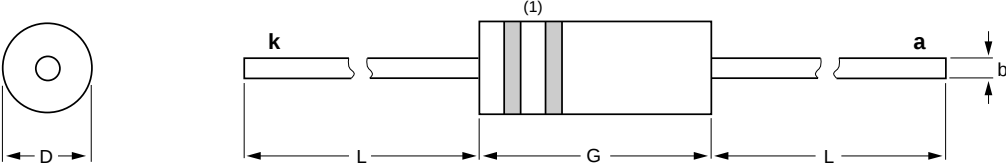

DIMENSIONS (mm are the original dimensions)

UNIT	b	D	G	L min.
mm	0.5	2.6 2.4	6.7 6.3	31

02.55mm

scale


Note

1. The marking bands indicate the cathode.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOD118A						98-05-28

Hermetically sealed plastic package; axial leaded; 2 leads

SOD118B

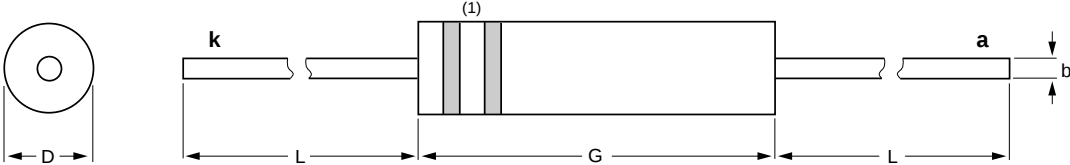

DIMENSIONS (mm are the original dimensions)

UNIT	b	D	G	L min.
mm	0.5	2.6 2.4	10.5 9.5	29

02.55mm

scale

Note

1. The marking bands indicate the cathode.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOD118B						98-05-28

**Fast high-voltage soft-recovery
controlled avalanche rectifiers**

BY9300 series

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

Fast high-voltage soft-recovery
controlled avalanche rectifiers

BY9300 series

NOTES

Philips Semiconductors – a worldwide company

Argentina: see South America

Australia: 3 Figtree Drive, HOMEBUSH, NSW 2140,
Tel. +61 2 9704 8141, Fax. +61 2 9704 8139

Austria: Computerstr. 6, A-1101 WIEN, P.O. Box 213,
Tel. +43 1 60 101 1248, Fax. +43 1 60 101 1210

Belarus: Hotel Minsk Business Center, Bld. 3, r. 1211, Volodarski Str. 6,
220050 MINSK, Tel. +375 172 20 0733, Fax. +375 172 20 0773

Belgium: see The Netherlands

Brazil: see South America

Bulgaria: Philips Bulgaria Ltd., Energoproject, 15th floor,
51 James Bourchier Blvd., 1407 SOFIA,
Tel. +359 2 68 9211, Fax. +359 2 68 9102

Canada: PHILIPS SEMICONDUCTORS/COMPONENTS,
Tel. +1 800 234 7381, Fax. +1 800 943 0087

China/Hong Kong: 501 Hong Kong Industrial Technology Centre,
72 Tat Chee Avenue, Kowloon Tong, HONG KONG,
Tel. +852 2319 7888, Fax. +852 2319 7700

Colombia: see South America

Czech Republic: see Austria

Denmark: Sydhavnsgade 23, 1780 COPENHAGEN V,
Tel. +45 33 29 3333, Fax. +45 33 29 3905

Finland: Sinikalliontie 3, FIN-02630 ESPOO,
Tel. +358 9 615 800, Fax. +358 9 6158 0920

France: 51 Rue Carnot, BP317, 92156 SURESNES Cedex,
Tel. +33 1 4099 6161, Fax. +33 1 4099 6427

Germany: Hammerbrookstraße 69, D-20097 HAMBURG,
Tel. +49 40 2353 60, Fax. +49 40 2353 6300

Hungary: see Austria

India: Philips INDIA Ltd, Band Box Building, 2nd floor,
254-D, Dr. Annie Besant Road, Worli, MUMBAI 400 025,
Tel. +91 22 493 8541, Fax. +91 22 493 0966

Indonesia: PT Philips Development Corporation, Semiconductors Division,
Gedung Philips, Jl. Buncit Raya Kav.99-100, JAKARTA 12510,
Tel. +62 21 794 0040 ext. 2501, Fax. +62 21 794 0080

Ireland: Newstead, Clonskeagh, DUBLIN 14,
Tel. +353 1 7640 000, Fax. +353 1 7640 200

Israel: RAPAC Electronics, 7 Kehilat Saloniki St, PO Box 18053,
TEL AVIV 61180, Tel. +972 3 645 0444, Fax. +972 3 649 1007

Italy: PHILIPS SEMICONDUCTORS, Via Casati, 23 - 20052 MONZA (MI),
Tel. +39 039 203 6838, Fax +39 039 203 6800

Japan: Philips Bldg 13-37, Kohnan 2-chome, Minato-ku,
TOKYO 108-8507, Tel. +81 3 3740 5130, Fax. +81 3 3740 5057

Korea: Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL,
Tel. +82 2 709 1412, Fax. +82 2 709 1415

Malaysia: No. 76 Jalan Universiti, 46200 PETALING JAYA, SELANGOR,
Tel. +60 3 750 5214, Fax. +60 3 757 4880

Mexico: 5900 Gateway East, Suite 200, EL PASO, TEXAS 79905,
Tel. +9-5 800 234 7381, Fax +9-5 800 943 0087

Middle East: see Italy

Netherlands: Postbus 90050, 5600 PB EINDHOVEN, Bldg. VB,
Tel. +31 40 27 82785, Fax. +31 40 27 88399

New Zealand: 2 Wagener Place, C.P.O. Box 1041, AUCKLAND,
Tel. +64 9 849 4160, Fax. +64 9 849 7811

Norway: Box 1, Manglerud 0612, OSLO,
Tel. +47 22 74 8000, Fax. +47 22 74 8341

Pakistan: see Singapore

Philippines: Philips Semiconductors Philippines Inc.,
106 Valero St. Salcedo Village, P.O. Box 2108 MCC, MAKATI,
Metro MANILA, Tel. +63 2 816 6380, Fax. +63 2 817 3474

Poland: Al.Jerozolimskie 195 B, 02-222 WARSAW,
Tel. +48 22 5710 000, Fax. +48 22 5710 001

Portugal: see Spain

Romania: see Italy

Russia: Philips Russia, Ul. Usatcheva 35A, 119048 MOSCOW,
Tel. +7 095 755 6918, Fax. +7 095 755 6919

Singapore: Lorong 1, Toa Payoh, SINGAPORE 319762,
Tel. +65 350 2538, Fax. +65 251 6500

Slovakia: see Austria

Slovenia: see Italy

South Africa: S.A. PHILIPS Pty Ltd., 195-215 Main Road Martindale,
2092 JOHANNESBURG, P.O. Box 58088 Newville 2114,
Tel. +27 11 471 5401, Fax. +27 11 471 5398

South America: Al. Vicente Pinzon, 173, 6th floor,
04547-130 SÃO PAULO, SP, Brazil,
Tel. +55 11 821 2333, Fax. +55 11 821 2382

Spain: Balmes 22, 08007 BARCELONA,
Tel. +34 93 301 6312, Fax. +34 93 301 4107

Sweden: Kottbygatan 7, Akalla, S-16485 STOCKHOLM,
Tel. +46 8 5985 2000, Fax. +46 8 5985 2745

Switzerland: Allmendstrasse 140, CH-8027 ZÜRICH,
Tel. +41 1 488 2741 Fax. +41 1 488 3263

Taiwan: Philips Semiconductors, 6F, No. 96, Chien Kuo N. Rd., Sec. 1,
TAIPEI, Taiwan Tel. +886 2 2134 2886, Fax. +886 2 2134 2874

Thailand: PHILIPS ELECTRONICS (THAILAND) Ltd.,
209/2 Sanpavuth-Bangna Road Prakanong, BANGKOK 10260,
Tel. +66 2 745 4090, Fax. +66 2 398 0793

Turkey: Yukari Dudullu, Org. San. Blg., 2.Cad. Nr. 28 81260 Umraniye,
ISTANBUL, Tel. +90 216 522 1500, Fax. +90 216 522 1813

Ukraine: PHILIPS UKRAINE, 4 Patrice Lumumba str., Building B, Floor 7,
252042 KIEV, Tel. +380 44 264 2776, Fax. +380 44 268 0461

United Kingdom: Philips Semiconductors Ltd., 276 Bath Road, Hayes,
MIDDLESEX UB3 5BX, Tel. +44 208 730 5000, Fax. +44 208 754 8421

United States: 811 East Arques Avenue, SUNNYVALE, CA 94088-3409,
Tel. +1 800 234 7381, Fax. +1 800 943 0087

Uruguay: see South America

Vietnam: see Singapore

Yugoslavia: PHILIPS, Trg N. Pasica 5/v, 11000 BEOGRAD,
Tel. +381 11 3341 299, Fax. +381 11 3342 553

For all other countries apply to: Philips Semiconductors,
International Marketing & Sales Communications, Building BE-p, P.O. Box 218,
5600 MD EINDHOVEN, The Netherlands, Fax. +31 40 27 24825

Internet: <http://www.semiconductors.philips.com>

© Philips Electronics N.V. 2000

SCA 69

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

135002/02/pp12

Date of release: 2000 Jan 10

Document order number: 9397 750 06638

Let's make things better.

**Philips
Semiconductors**



PHILIPS