
SHEET 1 OF 1




PANEL CUTOUT
MAX. PANEL THICKNESS
14.0mm [.551]


▲


SWITCH FUNCTION	
POS. 1	POS. 2
	
ON	(ON)
1-3	1-2

(ON) = MOMENTARY

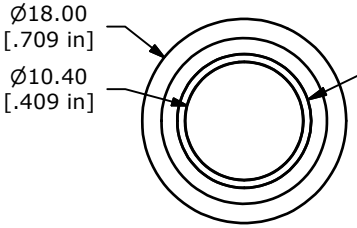


▲
RING ILLUMINATION
COLOR: TRANSPARENT BLUE

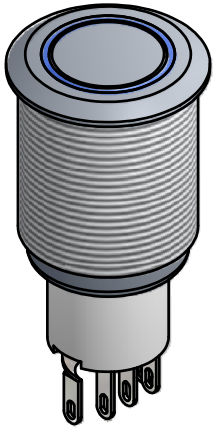




SPDT
CONTACT CONFIGURATION

▲
BODY FINISH
BLACK

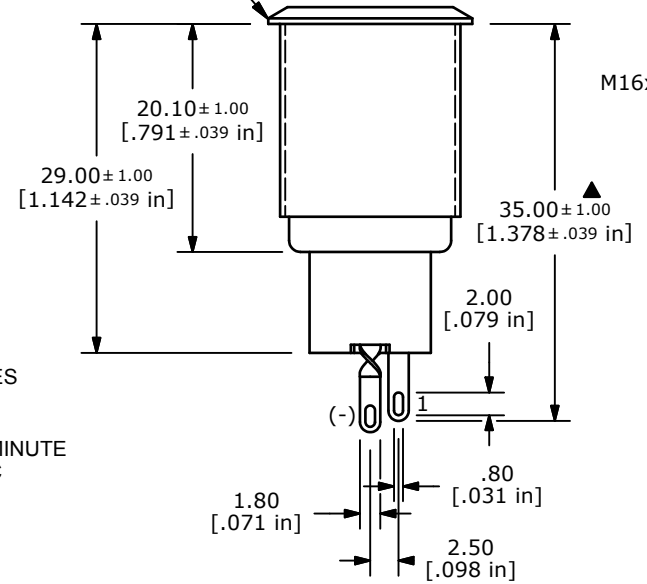

▲
1.50
[.059 in]
ACTUATOR FINISH
BLACK

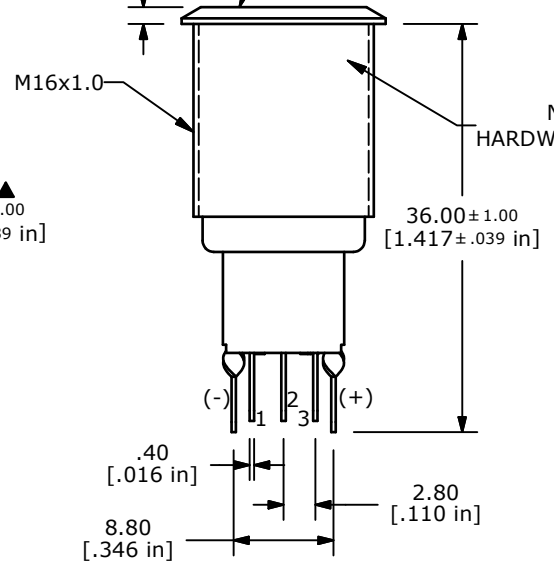

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. CONTACT MATERIAL: SILVER
5. RATING: 2A 48VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES
   AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -20°C to 55°C
11. ▲DENOTES CRITICAL PARAMETER.
▲12. LAMP VOLTAGE: 6V
▲13. ILLUMINATION COLOR: BLUE
14. HARDWARE SUPPLIED: O-RING AND HEXNUT
▲15. INGRESS RATING: IP40
16. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
C	20449	CORRECT CONTACT CONFIG.	02/02/12	BMA
B	20413	UPDATE AND CONVERT	01/19/12	BMA

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE PV3F2B011-343

SCALE	DATE	DR	DWG	REV
1.5:1	1/19/2012	BMA	52-PV3F2B011343	C