

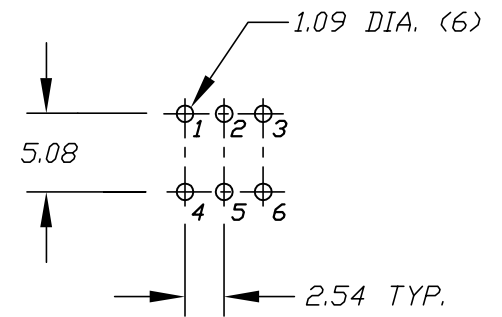
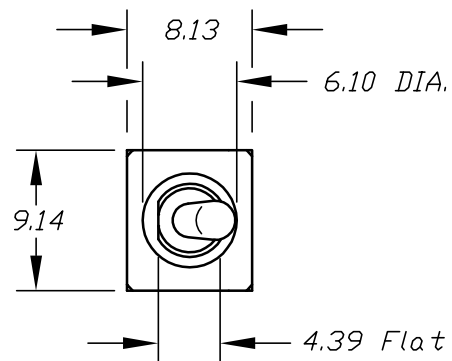



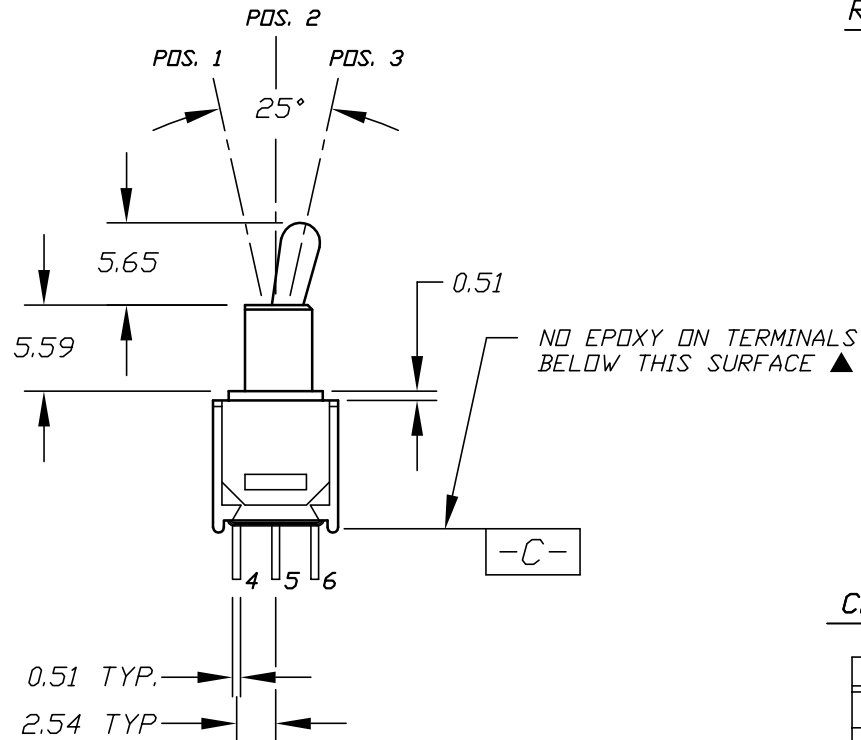

RECOMMEND P.C.B. HOLES

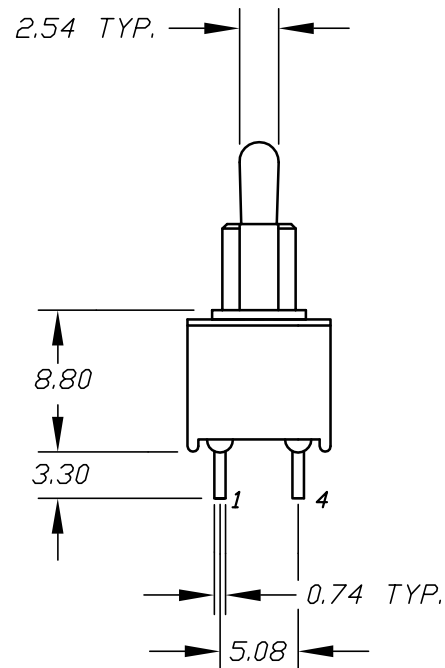

CIRCUIT: DPDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3,5-6	OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF ONLY
3. RATING: 3 Amps @120VAC or 28VDC; 1 Amp @250VAC

2. TERM. NOS. FOR REF ONLY				TOLERANCES	±0.4	±0.25	E-SWITCH®					
3. RATING: 3 Amps @120VAC or 28VDC; 1 Amp @250VAC							TITLE					
							200 MDP-1 T2 B2 M2 Q E					
B	REVISED & REDRAWN						SCALE		DATE	DR	DWG	REV
REV.	DESCRIPTION			DATE	CHKD		2:1		1/15/97	MM	T221001	B
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED												