

SAW Filter 145MHz

Model: TB0790A

Part No: MP02864

Rev No: 1

A. MAXIMUM RATING:

1. Operating temperature range: -40°C to +65°C
2. Storage temperature range: -40°C to +85°C
3. Input Power Level: 10dBm
4. Maximum DC Voltage: 10V

B. CHARACTERISTICS:

Electrical Parameters			Value		
Parameter	Sign	Units	Min.	Typ.	Max.
Central Frequency	Fc	MHz	-	145	-
Insertion Loss	IL	dB	-	3.0	3.5
-0.5 dB Pass Bandwidth	BW1	MHz	0.050	0.068	-
-3 dB Pass Bandwidth	BW3	MHz	-	0.098	0.140
-40 dB Pass Bandwidth	BW40	MHz	-	0.28	0.38
Amplitude Ripple Fc ± 0.02MHz	AR	dB	-	0.3	0.5
Input/Output VSWR at Fc	VSWR	-	-	1.2	1.7
Relative Attenuation					
DC ~ 144.6MHz	UR	dB	50	70	-
145.4MHz ~ 290MHz	UR	dB	50	60	-
290MHz ~ 435MHz	UR	dB	50	70	-
Source and Load Impedances	RS/RL	Ω	50		

SAW Filter 145MHz
Part No: MP02864

Model: TB0790A
Rev No: 1

C. FREQUENCY CHARACTERISTICS:

1. Wide band Response: (span 1MHz)

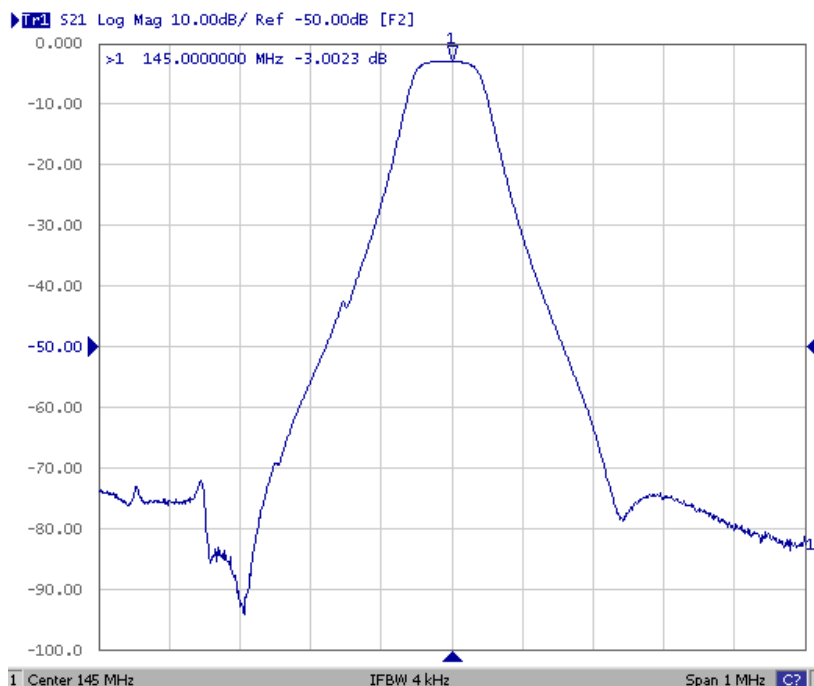


Fig1. Horizontal: 0.1MHz/Div, Vertical: 10dB/Div

2. Pass band Response and Group Time Delay response:

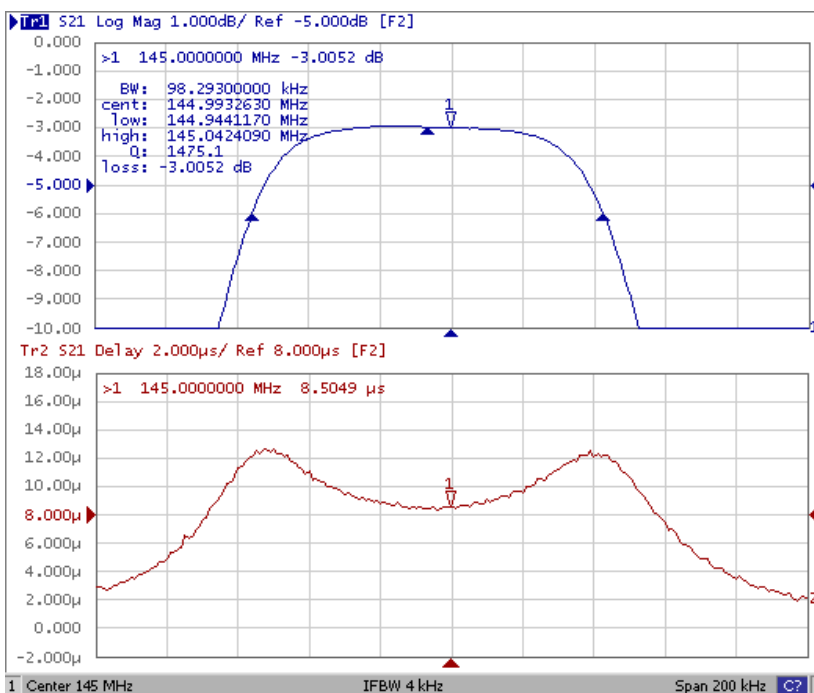


Fig2. Horizontal: 0.02MHz/Div, Vertical: 1dB/Div & Vertical: 2us/Div

SAW Filter 145MHz
Part No: MP02864

Model: TB0790A
Rev No: 1

3. VSWR:


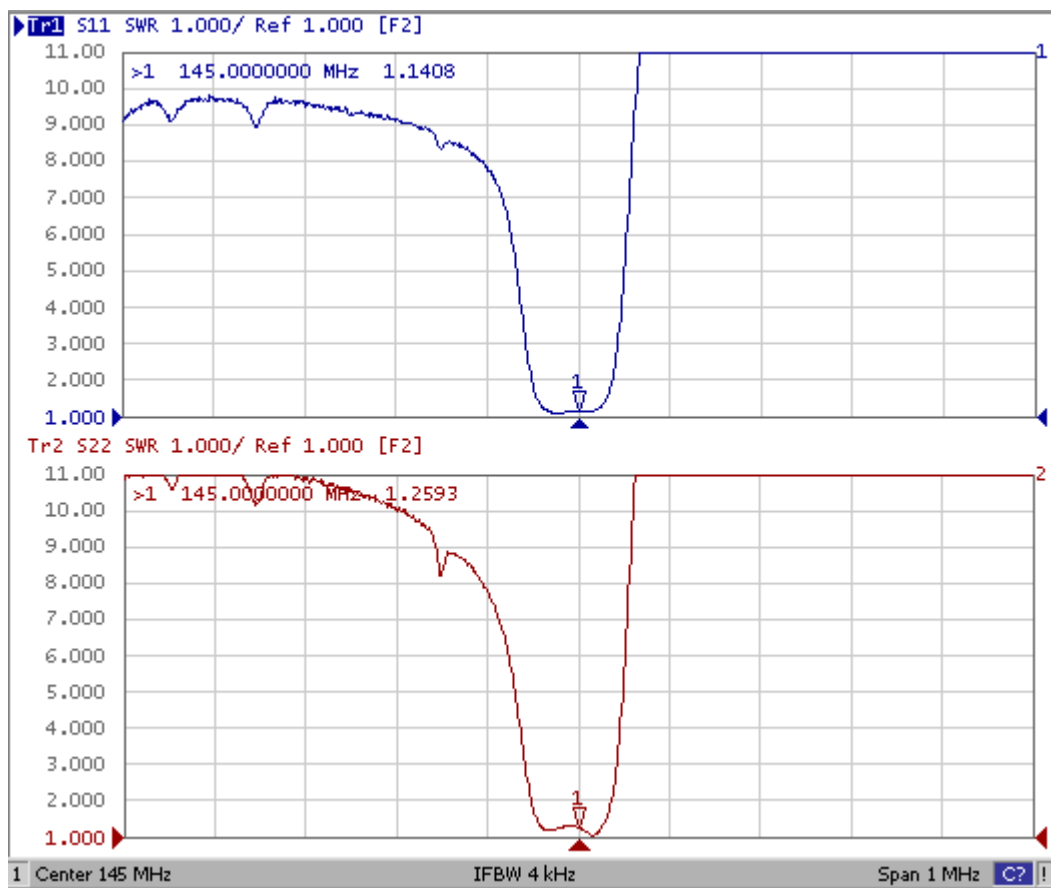


Fig3. Horizontal: 0.1MHz/Div, Vertical: 1/Div

D. MATCHING CIRCUIT:

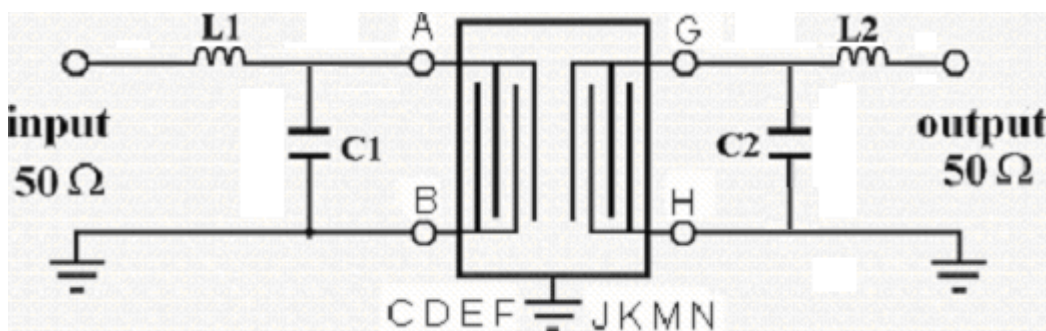


$L1 = 180\text{nH}$, $C1 = 2\text{pF}$, $L2 = 180\text{nH}$, $C2 = 2\text{pF}$
 $Z_{in} = 50\ \Omega$, $Z_{out} = 50\ \Omega$

SAW Filter 145MHz
Part No: MP02864


Model: TB0790A
Rev No: 1

E. OUTLINE DRAWING:

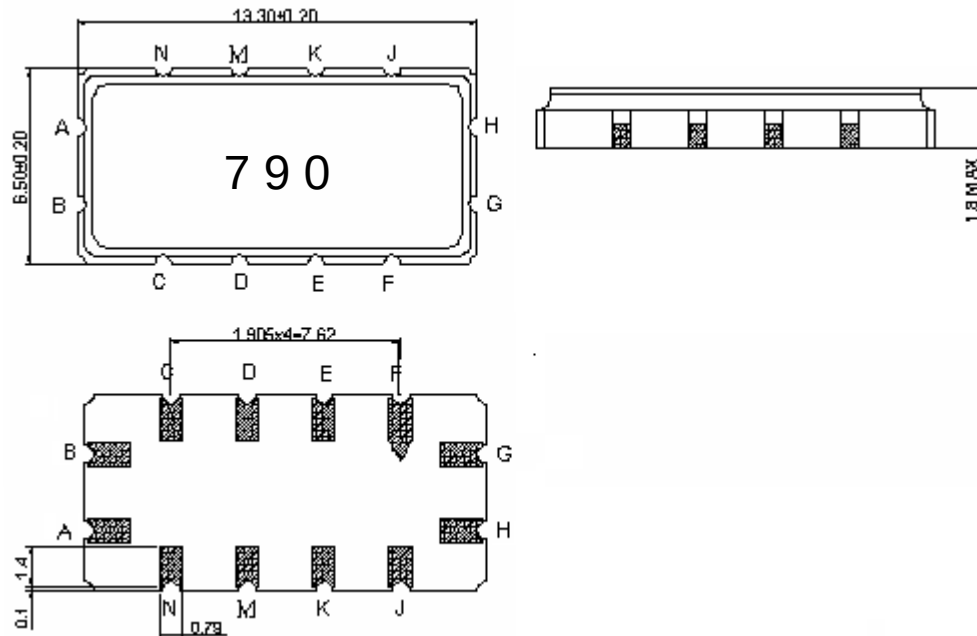

Pin A: RF input
Pin B: RF input ground
Pin G: RF output
Pin H: RF output ground
Pin C: D, E, F, J, K, M, N: Ground
Unit: mm

F. PCB FOOTPRINT:

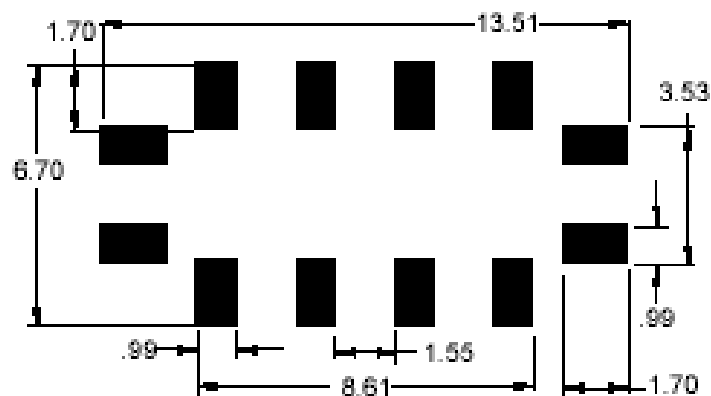


SAW Filter 145MHz
Part No: MP02864

Model: TB0790A
Rev No: 1


G. PACKING:

1. REEL DIMENSION

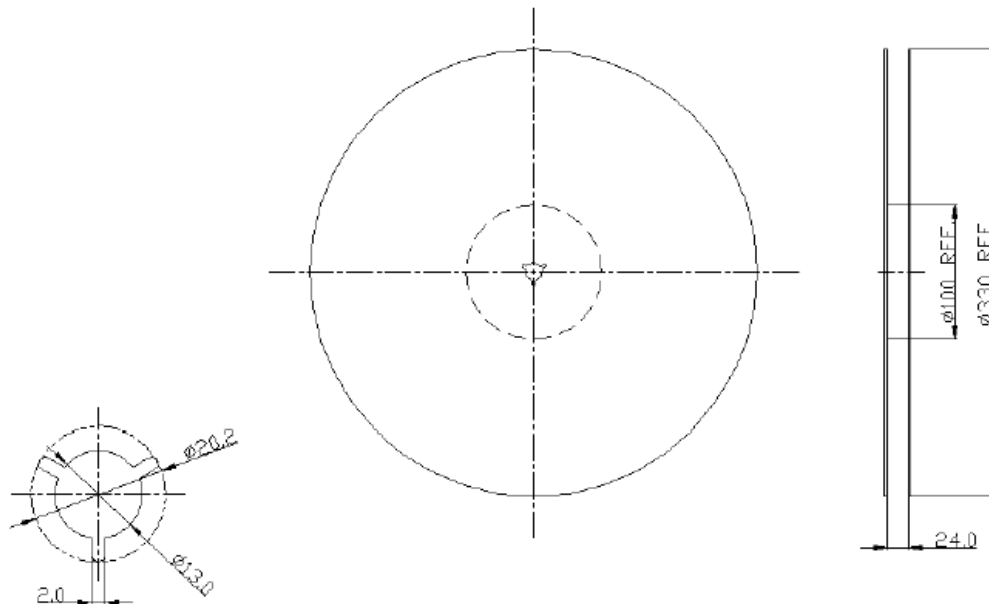

Unit: mm

2. TAPE DIMENSION

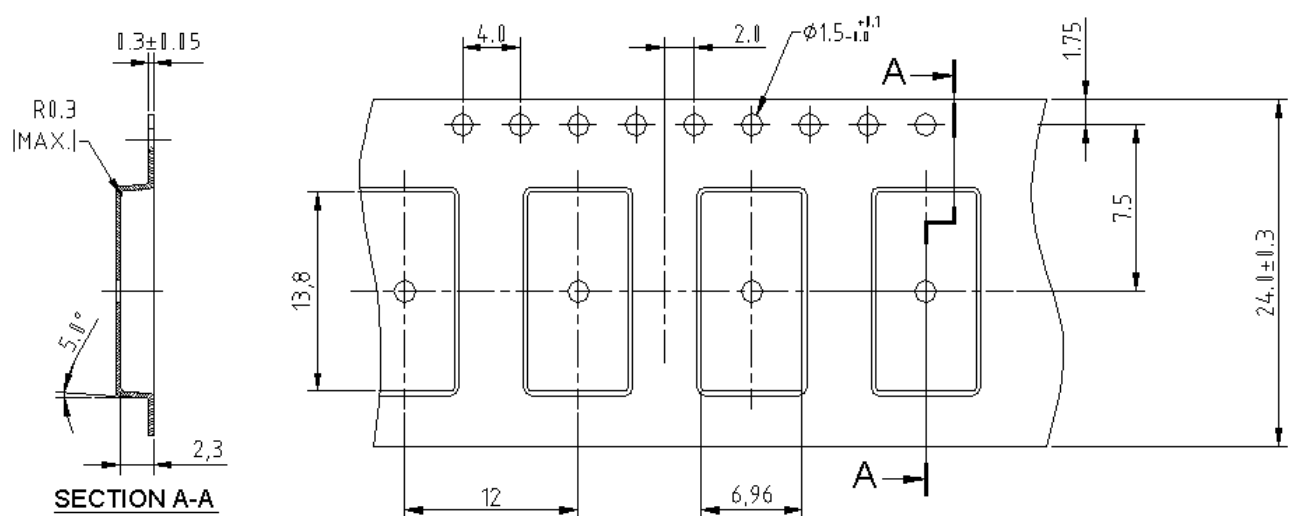

SAW Filter 145MHz
Part No: MP02864

Model: TB0790A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

