


Specifications

Voltage Rating: 150V AC
 Current Rating: 1.0A
 Operating Temperature Range: -40°C to +105°C
 Withstanding Voltage: 500V for 1 minute
 Soldering Temp.: 260°C / 3 sec.

Materials and Finish

Housing: UL 94V-0 listed
 Terminals: Brass
 Contact Plating: Selective Gold over Nickel



Features

⇒ Pin count from 10 to 68

Part Number (Details)

ZP8 - ** - G2T

Series No.


No. of Contact Pins

Plating:

G2T = Selective Gold

Outline Connector Dimensions

Recommended PCB Layouts

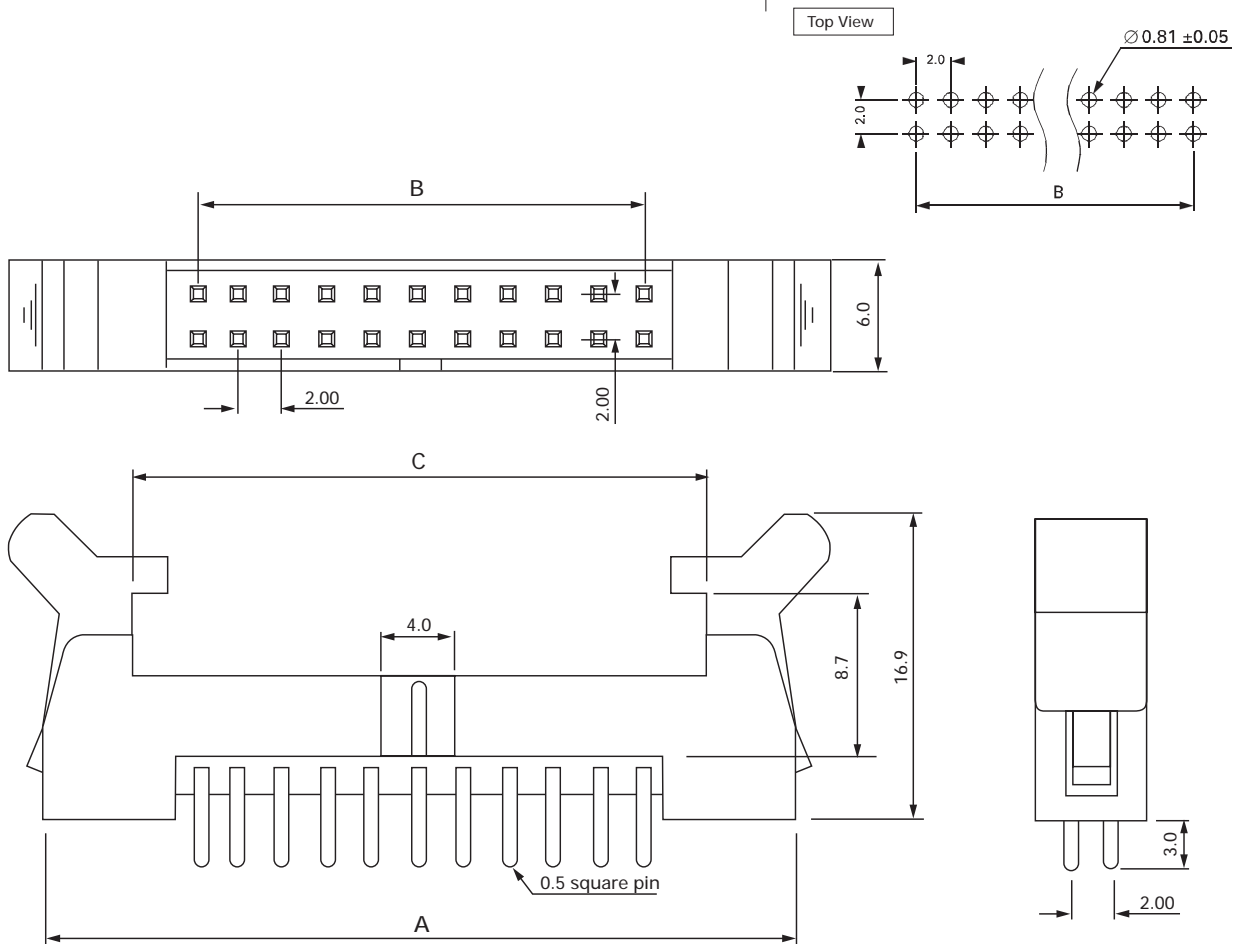

Dimensional Information

Part Number	Dim. A	Dim. B	Dim. C	Part Number	Dim. A	Dim. B	Dim. C
ZP8-10-G2T	25.7	8.0	15.8	ZP8-26-G2T	41.7	24.0	31.8
ZP8-12-G2T	27.7	10.0	17.8	ZP8-30-G2T	45.7	28.0	35.8
ZP8-14-G2T	29.7	12.0	19.8	ZP8-34-G2T	49.7	32.0	39.8
ZP8-16-G2T	31.7	14.0	21.8	ZP8-40-G2T	55.7	38.0	45.8
ZP8-20-G2T	35.7	18.0	25.8	ZP8-44-G2T	59.7	42.0	49.8
ZP8-22-G2T	37.7	20.0	27.8	ZP8-50-G2T	65.7	48.0	55.8
ZP8-24-G2T	39.7	22.0	29.8	ZP8-68-G2T	83.7	66.0	73.8