
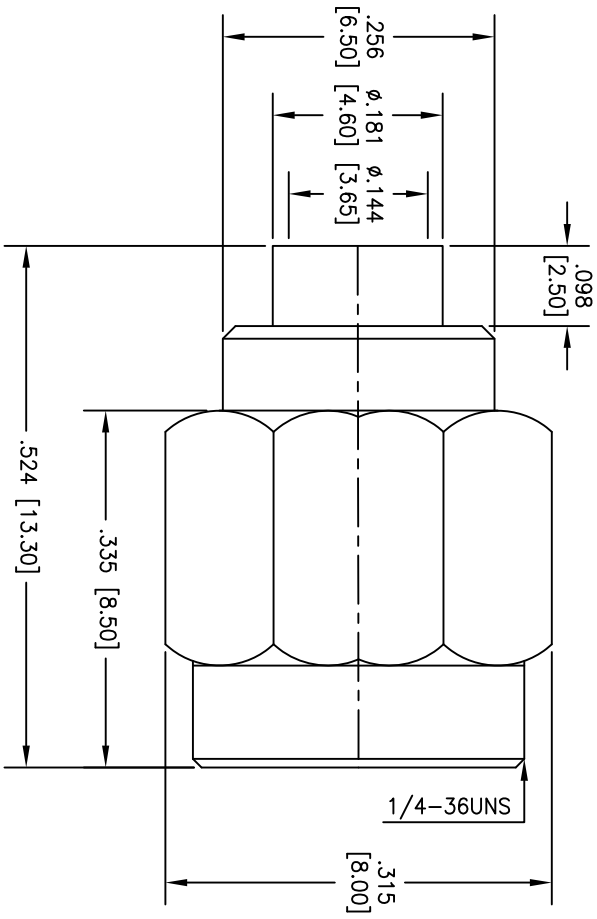


Rev	AWO #	Description	Date	Appr
-	9986	RELEASED	1/20/10	

APPROVED: _____
 DATE: _____ TITLE: _____

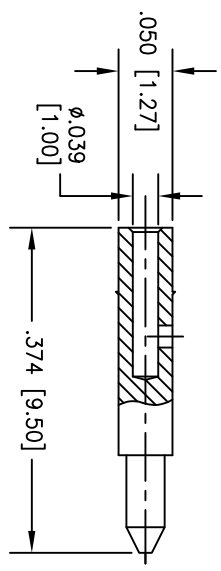

DESCRIPTION	MATERIAL	FINISH
SHELL	BRASS	GOLD
GASKET	SILICON	NONE
RING	SUS-304	CLEANING
INSULATOR	TEFLON	NONE
PIN	BRASS	GOLD
BODY	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:
 Nominal Impedance: 50 ohms
 Frequency range: 0-12.4 GHz
 Working Voltage: 250 VRMS max.
 Dielectric Withstanding Voltage: 750 VRMS min.
 Contact Resistance: 6 Milliohms max. (Center Contact)
 2 Milliohms max. (Outer Contact)
 Insulator Resistance: 5000 Megohms min.
 Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SMA MALE SEMI-RIGID RG402 (.141)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES. [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	
DRAWN	DATE
CHECKED	
APPROVED	

REV.	DATE	DESCRIPTION
-	1/20/10	RELEASED

TITLE	SIZE	PART NO.	REV.
SMA MALE SEMI-RIGID RG402 (.141)	X	RF2-48-T-07-50-G	-
REF:	SCALE:	SHEET	OF
S0001TT	NTS	1	1