

## FEATURES


- Very low profile package
- Ideal for automated placement
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High surge capability
- Meets MSL Level 1,per J-STD-020,LF maximum peak of 260°C  
Component in accordance to RoHS 2011/65/EU and WEEE 2012/19/EU



RoHS  
COMPLIANT



## SOD-123FL

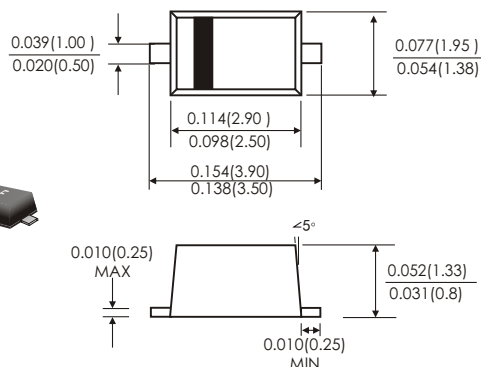


## MECHANICAL DATA

- Case: Flat lead SOD-123FL small outline plastic package
- Molding compound meets UL 94 V-0 flammability rating
- Terminals: solderable per J-STD-002 and JESD22-B102
- Polarity: color band denotes cathode end
- Mounting Position: Any
- Weight: 8.85 mg(approximately)

## TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

## Suggested PAD Layout

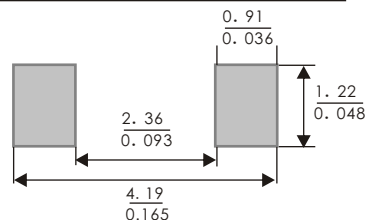

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified )

Parameter	Symbol	L14	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	40	V
Maximum average forward rectified current	$I_{F(AV)}$	1.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	$I_{FSM}$	40	A
Operating junction temperature range	$T_j$	-55 to+150	°C
Storage temperature range	$T_{stg}$	-55 to+150	°C

## RATINGS AND CHARACTERISTIC OF L14

### ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	TYP.	MAX.	Unit
Instaneous forward voltage	I <sub>F</sub> =1.0A	T <sub>A</sub> =25°C	V <sub>F</sub> <sup>1)</sup>	0.43	0.45	V
		T <sub>A</sub> =100°C		0.37	0.39	
		T <sub>A</sub> =125°C		0.35	0.37	
Reverse current	V <sub>R</sub> =40V	T <sub>A</sub> =25°C	I <sub>R</sub> <sup>2)</sup>	50	200	μA
		T <sub>A</sub> =100°C		5	10	mA
		T <sub>A</sub> =125°C		15	30	
Typical junction capacitance	4V, 1MHz		C <sub>j</sub>	110		pF

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Pulse test: pulse width≤40ms

### THERMAL CHARACTERISTICS (T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Symbol	L14	Unit
Typical thermal resistance <sup>3)</sup>	R <sub>θJA</sub>	206.0	°C/W
	R <sub>θJL</sub>	118.0	

3.PCB Mounted with The Suggested PAD Size

### AVAILABALE PACK INFORMATION

Product code	Pack	Reel Size (mm)	Quantity (pcs/reel)	Box Size L×W×H (mm)	Quantity (reel/box)	Carton Size L×W×H (mm)	Quantity (box/carton)
L14-SOD-123FL	T/R	Φ330	7500	330×35×333	2	364×364×360	8

# RATINGS AND CHARACTERISTIC OF L14

FIG.1-FORWARD CURRENT DERATING CURVE

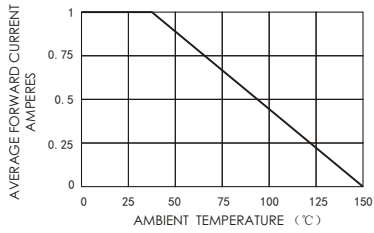


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

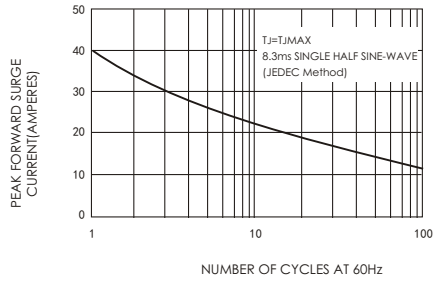


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

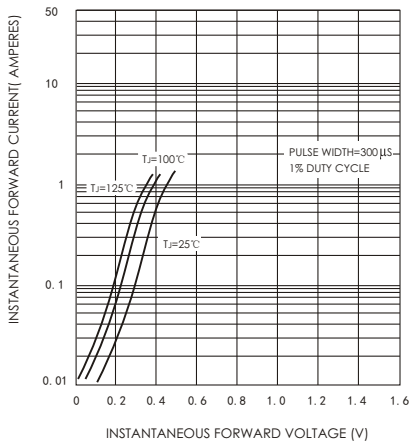


FIG.4-TYPICAL REVERSE CHARACTERISTICS

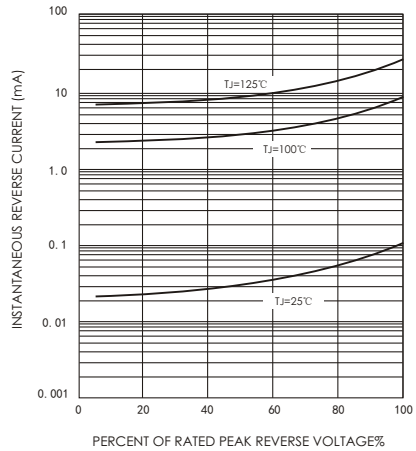


FIG.5-TYPICAL JUNCTION CAPACITANCE

