
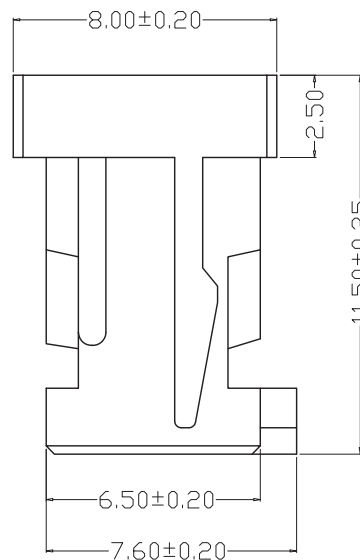


环保物料

TEL: 0769-82001899

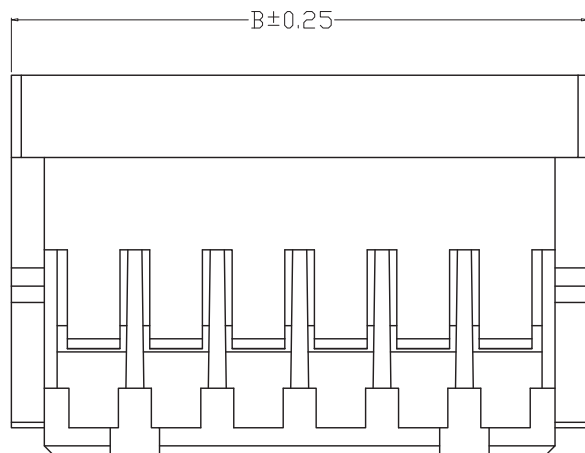



SPECIFICATIONS

- 1.Voltage rating: 250V AC, DC
- 2.Current rating: 3A, AC, DC
- 3.Withstanding Voltage: 800V AC/minute
- 4.Insulation resistance:1000M min
- 5.Temperature range: -25 ° C-+85 ° C
- 6.Contact resistance: 30m max

HOUSING

Housing Material:Nylon66 UL94V-0(2)
 Accepts :T2557 terminal
 Mates with: M2557 series header
 Poles : 04-40P
 Part No.: P2557-2xXX-N0

Pin位数

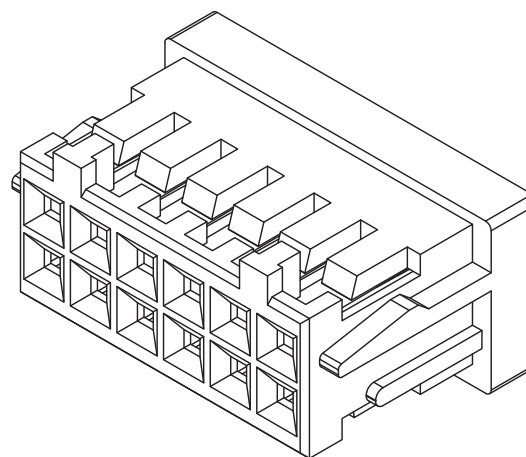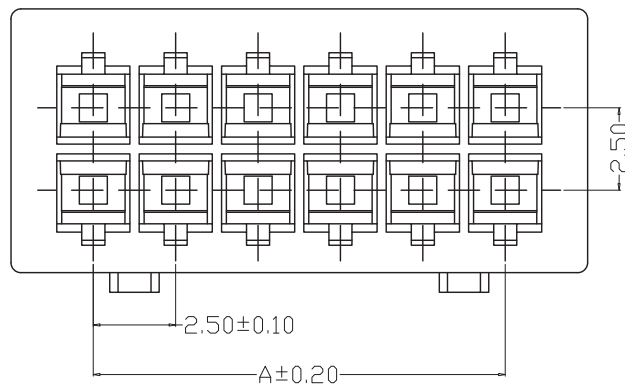

编 号	尺寸 (mm)	
	A	B
2*02	2.50	7.50
2*03	5.00	10.00
2*04	7.50	12.50
2*05	10.00	15.00
2*06	12.50	17.50
2*07	15.00	20.00
2*08	17.50	22.50
2*09	20.00	25.00
2*10	22.50	27.50
2*11	25.00	30.00
2*12	27.50	32.50
2*20	47.50	52.50

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN 兴飞连接器有限公司 XFCN CONNECTORS CO.,LTD. PRODUCT NAME 2.50mm Crimp Style Connectors PART. NO. P2557-2xXX-N0	SHEET	1/1
				X.	±0.30	X°	±5°		DATE	2021-04-26
				.X	±0.20	.X°	±2°		UNITS	mm
				.XX	±0.08	.XX°	±1°		SCALE	1:1
				.XXX	±0.03	.XXX°	±0.5°		DWG. NO.	009
AO	MODIFICATION	DRAW	DATE							