


# METAL OXIDE VARISTOR

## Housing Type 30KA


Part Number	Maximum Allowable Voltage		Varistor Voltage		Maximum Clamping Voltage At 200A (V)	Withstanding Surge Current 8/20 S (A)	Rated Wattage (W)	Energy 10/1000 s (J)	UL
	ACrms (V)	DC (V)	DC (V)	Tolerance Range					
MOV-201KD32H	130	175	200	185-225	330	30,000	1.2	215	✓
MOV-221KD32H	140	180	220	198-242	360	30,000	1.2	235	✓
MOV-241KD32H	150	200	240	216-264	395	30,000	1.2	245	✓
MOV-271KD32H	175	225	270	243-297	455	30,000	1.2	260	✓
MOV-301KD32H	190	250	300	270-330	505	30,000	1.2	275	✓
MOV-331KD32H	210	275	330	297-363	550	30,000	1.2	295	✓
MOV-361KD32H	230	300	360	324-396	595	30,000	1.2	305	✓
MOV-391KD32H	250	330	390	351-429	650	30,000	1.2	335	✓
MOV-431KD32H	275	370	430	387-473	710	30,000	1.2	365	✓
MOV-471KD32H	300	385	470	423-517	775	30,000	1.2	390	✓
MOV-511KD32H	320	420	510	459-561	845	30,000	1.2	440	✓
MOV-561KD32H	350	460	560	504-616	920	30,000	1.2	490	✓
MOV-621KD32H	385	505	620	558-682	1025	30,000	1.2	540	✓
MOV-681KD32H	420	560	680	612-748	1120	30,000	1.2	540	✓
MOV-751KD32H	480	640	750	675-825	1240	30,000	1.2	590	✓
MOV-781KD32H	485	640	780	702-858	1290	30,000	1.2	620	✓
MOV-821KD32H	510	675	820	738-902	1355	30,000	1.2	655	✓
MOV-911KD32H	575	745	910	819-1001	1500	30,000	1.2	725	✓
MOV-102KD32H	660	850	1000	945-1155	1650	30,000	1.2	795	✓
MOV-112KD32H	680	895	1100	990-1210	1815	30,000	1.2	875	✓
MOV-122KD32H	750	970	1200	1080-1320	1925	30,000	1.2	960	✓
MOV-152KD32H	900	1200	1500	1350-1650	2475	30,000	1.2	1000	✓
MOV-182KD32H	1000	1465	1800	1620-1980	2970	30,000	1.2	1300	✓

\* Add suffix - L for RoHS Compliant

### Dimensions

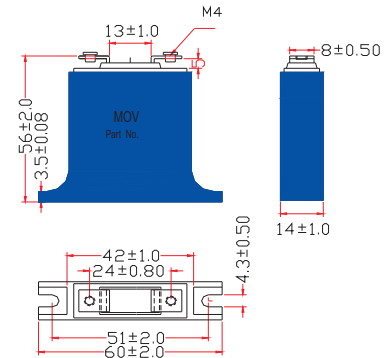

### PULSE RATING CURVES

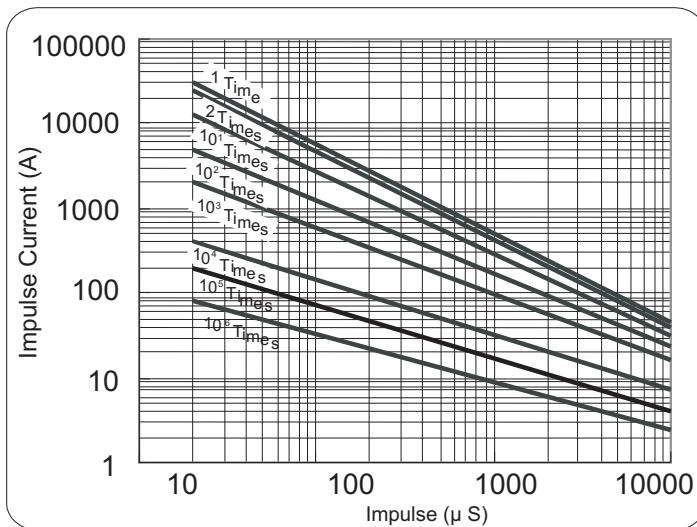

### V-I CHARACTERISTIC CURVES

