


Film, Film/Foil Polypropylene, Motor Run, C274, 30 uF, 5%, 470 V

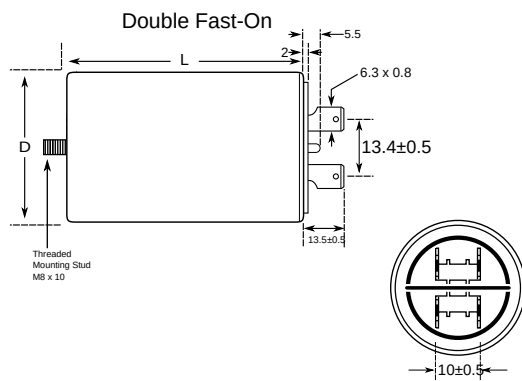

#### Dimensions

|   |             |
|---|-------------|
| D | 45mm +1mm   |
| L | 93mm +/-2mm |

#### Packaging Specifications

|            |              |
|------------|--------------|
| Mounting:  | Bolt - M8x10 |
| Packaging: | Bulk         |

#### General Information

|              |                                                             |
|--------------|-------------------------------------------------------------|
| Dielectric:  | Film/Foil Polypropylene                                     |
| Style:       | Can                                                         |
| Series:      | C274                                                        |
| Description: | Plastic Case and Cover, Ultra Sonically Welded Seal         |
| Features:    | Ultra Sonically Welded Seal, Safety Class P0, UL_94 V0 Disk |
| RoHS:        | Yes                                                         |
| Lead:        | Fast On (2+2)                                               |
| Approvals:   | UL, VDE, UL (Construction Only), UL_94 V0 Disk              |

#### Specifications

|                        |          |
|------------------------|----------|
| Capacitance:           | 30 uF    |
| Capacitance Tolerance: | 5%       |
| Voltage AC:            | 470 VAC  |
| Temperature Range:     | -25/+85C |
| Rated Temperature:     | 85C      |
| Max dVdt:              | 20 V     |