
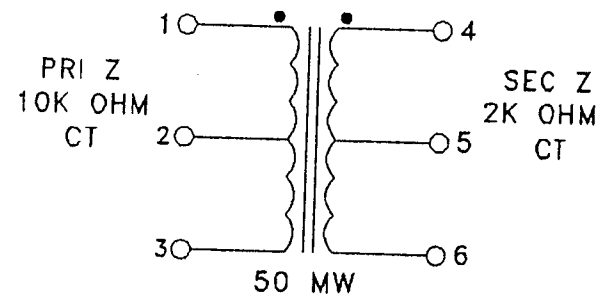
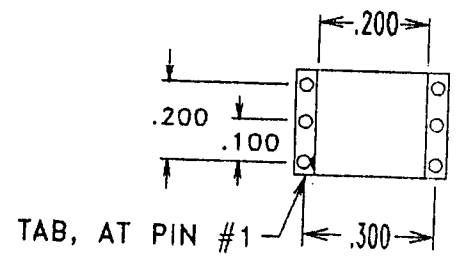


PRODUCTION TESTS

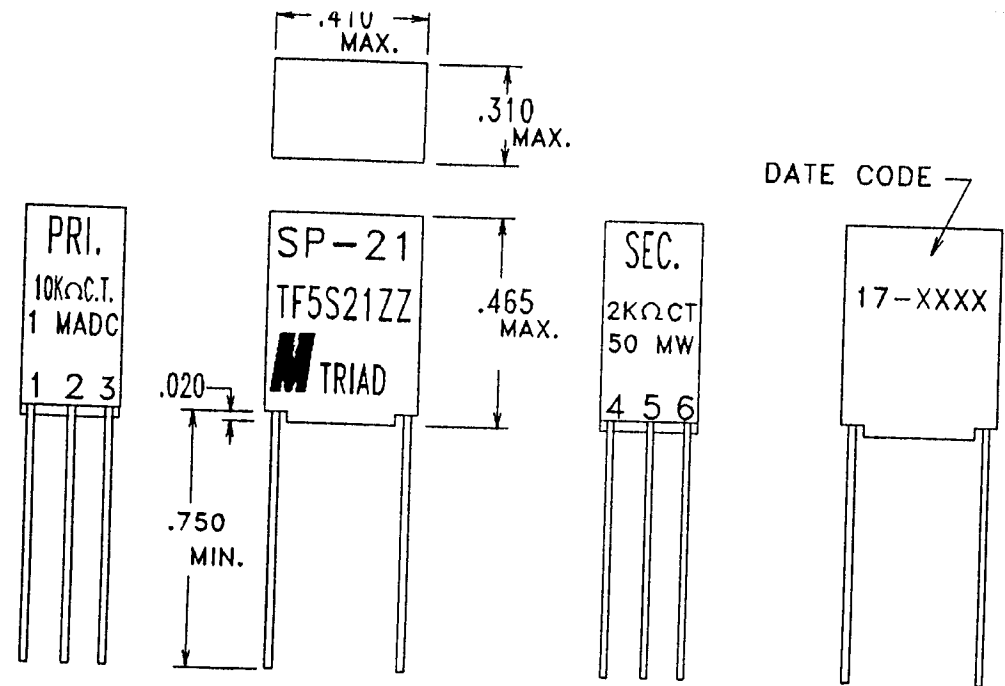

LEADS: #24 (.020 DIA)
1/4 HARD, 52 ALLOY,
GOLD PLATED.

TURNS RATIO = 100%	
DC RESISTANCE IN OHMS	1-3 = 1050 NOM
	4-6 = 325 NOM
APPLY: 12.2 V, 300 HZ, 1-3	
OPEN CIRCUIT VOLTAGE	
4-6 = 5.34 TO 5.55 V	
CENTER BALANCE = 1%	
OPEN CIRCUIT PRI IMPEDANCE, 1-3	
22,000 OHMS MINIMUM	

HIPOT = PRI TO SEC 1000V
THERMAL SHOCK: 10 CYCLES
10MIN. COLD -55 C
20 MIN. HOT 125 C

FINAL ASSEMBLY NOTES

M a g n e T e k

SP-21