

**PowerMOS transistor**

**BUK457-400A**  
**BUK457-400B**

T-39-13

**GENERAL DESCRIPTION**

N-channel enhancement mode field-effect power transistor in a plastic envelope.

The device is intended for use in Switched Mode Power Supplies (SMPS), motor control, welding, DC/DC and AC/DC converters, and in general purpose switching applications.

**QUICK REFERENCE DATA**

SYMBOL	PARAMETER	MAX.	MAX.	UNIT
		<b>BUK457</b>	<b>-400A</b>	<b>-400B</b>
$V_{DS}$	Drain-source voltage	400	400	V
$I_D$	Drain current (DC)	13	11	A
$P_{tot}$	Total power dissipation	150	150	W
$R_{DS(ON)}$	Drain-source on-state resistance	0.4	0.5	$\Omega$

**MECHANICAL DATA**

Dimensions in mm

Net Mass: 2g

Pinning:

1 = Gate

2 = Drain

3 = Source

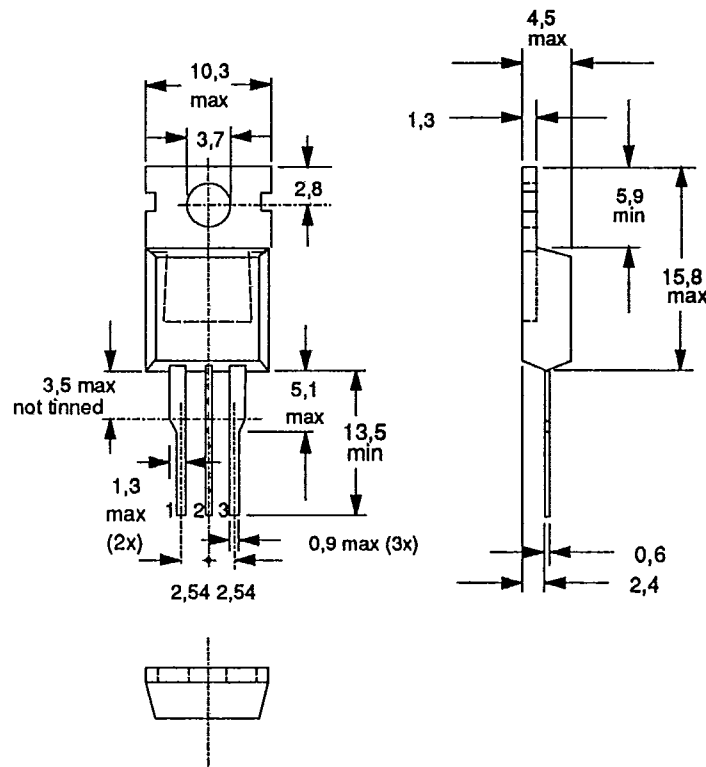



Fig.1 TO220AB; drain connected to mounting base.

**Notes**

1. Observe the general handling precautions for electrostatic-discharge sensitive devices (ESDs) to prevent damage to MOS gate oxide.
2. Accessories supplied on request: refer to Mounting instructions for TO220 envelopes.

## PowerMOS transistor

**BUK457-400A**  
**BUK457-400B**

T-39-13

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.		UNIT
				-400A	-400B	
$V_{DS}$	Drain-source voltage	-	-	400		V
$V_{DGR}$	Drain-gate voltage	$R_{GS} = 20 \text{ k}\Omega$	-	400		V
$\pm V_{GS}$	Gate-source voltage	-	-	30		V
$I_D$	Drain current (DC)	$T_{mb} = 25 \text{ }^\circ\text{C}$	-	13	11	A
$I_D$	Drain current (DC)	$T_{mb} = 100 \text{ }^\circ\text{C}$	-	8.2	7	A
$I_{DM}$	Drain current (pulse peak value)	$T_{mb} = 25 \text{ }^\circ\text{C}$	-	52	44	A
$P_{tot}$	Total power dissipation	$T_{mb} = 25 \text{ }^\circ\text{C}$	-	150		W
$T_{stg}$	Storage temperature	-	-55	150		$^\circ\text{C}$
$T_j$	Junction Temperature	-	-	150		$^\circ\text{C}$

## THERMAL RESISTANCES

From junction to mounting base	$R_{th-j-mb} = 0.83 \text{ K/W}$
From junction to ambient	$R_{th-j-a} = 60 \text{ K/W}$

## STATIC CHARACTERISTICS

 $T_{mb} = 25 \text{ }^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)DSS}$	Drain-source breakdown voltage	$V_{GS} = 0 \text{ V}; I_D = 0.25 \text{ mA}$	400	-	-	V
$V_{GS(TH)}$	Gate threshold voltage	$V_{DS} = V_{GS}; I_D = 1 \text{ mA}$	2.1	3.0	4.0	V
$I_{DSS}$	Zero gate voltage drain current	$V_{DS} = 400 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 25 \text{ }^\circ\text{C}$	-	2	20	$\mu\text{A}$
$I_{DSS}$	Zero gate voltage drain current	$V_{DS} = 400 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 125 \text{ }^\circ\text{C}$	-	0.1	1.0	mA
$I_{GSS}$	Gate source leakage current	$V_{GS} = \pm 30 \text{ V}; V_{DS} = 0 \text{ V}$	-	10	100	nA
$R_{DS(ON)}$	Drain-source on-state resistance	$V_{GS} = 10 \text{ V}; I_D = 6.5 \text{ A}$	-	0.35	0.4	$\Omega$
		<b>BUK457-400A</b>	-	0.45	0.5	$\Omega$
		<b>BUK457-400B</b>	-	0.45	0.5	$\Omega$

## DYNAMIC CHARACTERISTICS

 $T_{mb} = 25 \text{ }^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$g_{fs}$	Forward transconductance	$V_{DS} = 25 \text{ V}; I_D = 6.5 \text{ A}$	5.0	8.0	-	S
$C_{iss}$	Input capacitance	$V_{GS} = 0 \text{ V}; V_{DS} = 25 \text{ V}; f = 1 \text{ MHz}$	-	1500	1800	pF
$C_{oss}$	Output capacitance		-	170	270	pF
$C_{rss}$	Feedback capacitance		-	70	120	pF
$t_{d on}$	Turn-on delay time	$V_{DD} = 30 \text{ V}; I_D = 2.8 \text{ A};$	-	20	40	ns
$t_r$	Turn-on rise time	$V_{GS} = 10 \text{ V}; R_{GS} = 50 \text{ } \Omega;$	-	60	90	ns
$t_{d off}$	Turn-off delay time	$R_{gen} = 50 \text{ } \Omega$	-	200	250	ns
$t_f$	Turn-off fall time		-	75	90	ns
$L_d$	Internal drain inductance	Measured from contact screw on tab to centre of die	-	3.5	-	nH
$L_d$	Internal drain inductance	Measured from drain lead 6 mm from package to centre of die	-	4.5	-	nH
$L_s$	Internal source inductance	Measured from source lead 6 mm from package to source bond pad	-	7.5	-	nH

PowerMOS transistor





BUK457-400A  
BUK457-400B

T-39-13

REVERSE DIODE RATINGS AND CHARACTERISTICS

$T_{mb} = 25\text{ }^\circ\text{C}$  unless otherwise specified







SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$I_{DR}$	Continuous reverse drain current	-	-	-	13	A
$I_{DRM}$	Pulsed reverse drain current	-	-	-	52	A
$V_{SD}$	Diode forward voltage	$I_F = 13\text{ A}; V_{GS} = 0\text{ V}$	-	1.1	1.4	V
$t_{rr}$	Reverse recovery time	$I_F = 13\text{ A}; -di_F/dt = 100\text{ A}/\mu\text{s}; V_{GS} = 0\text{ V}; V_R = 100\text{ V}$	-	500	-	ns
$Q_{rr}$	Reverse recovery charge	$I_F = 13\text{ A}; -di_F/dt = 100\text{ A}/\mu\text{s}; V_{GS} = 0\text{ V}; V_R = 100\text{ V}$	-	6.0	-	$\mu\text{C}$

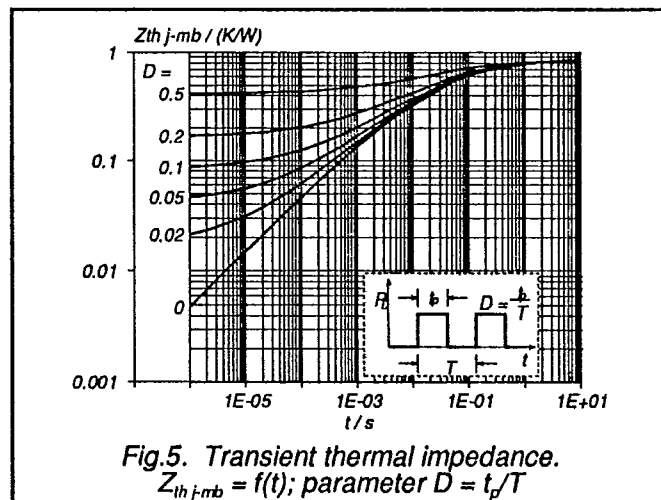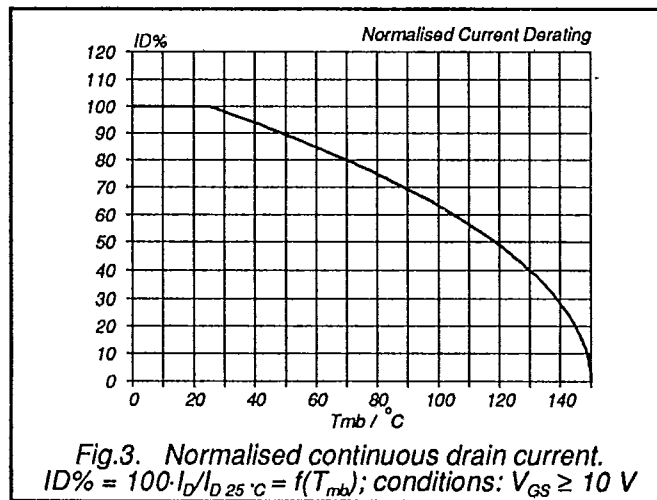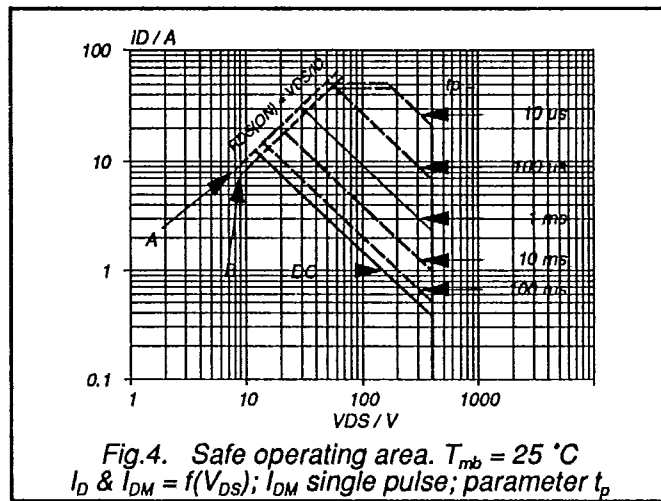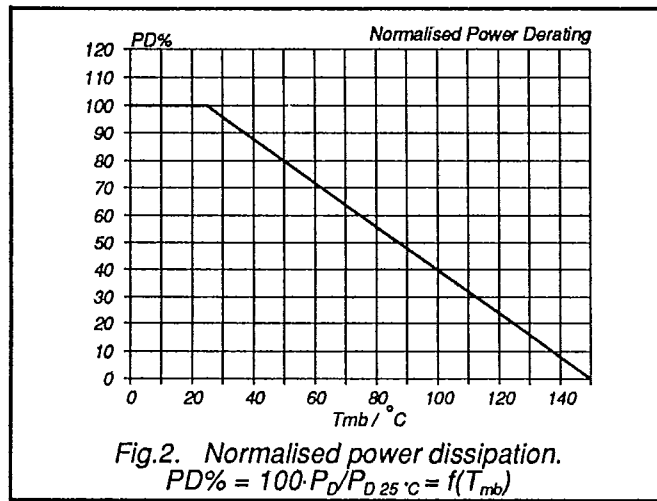

PowerMOS transistor

BUK457-400A  
BUK457-400B

T-39-13

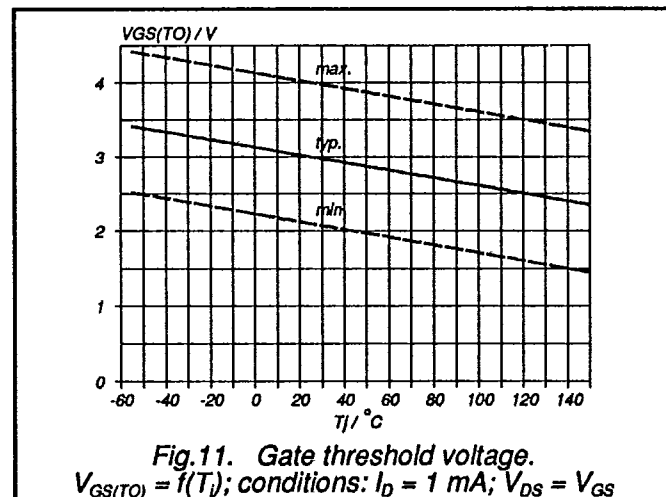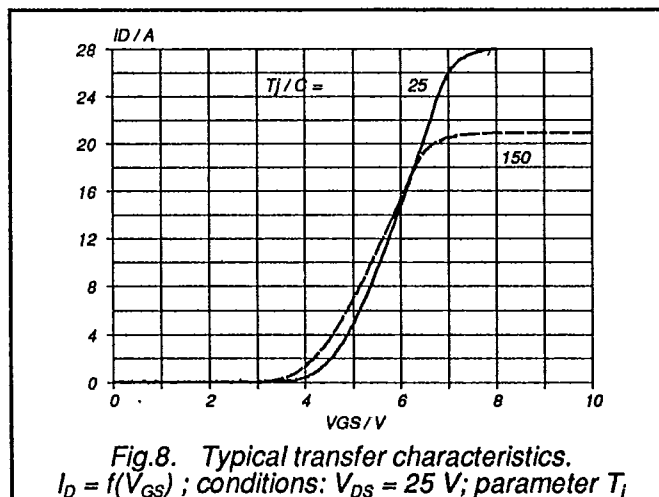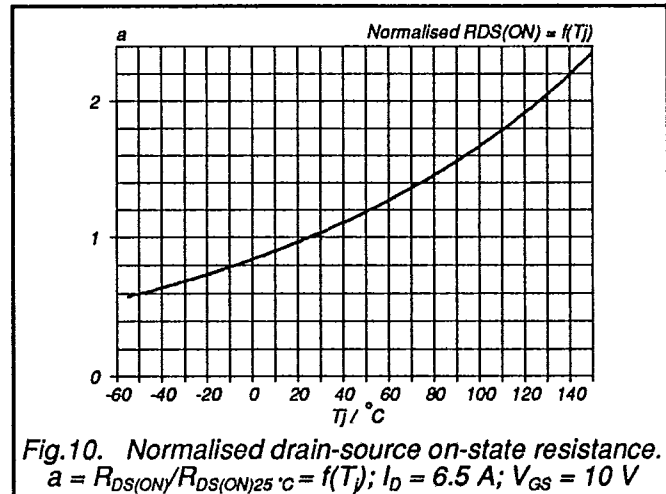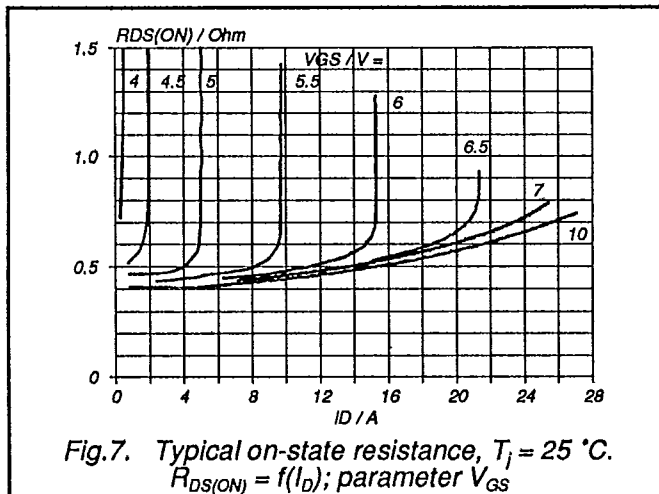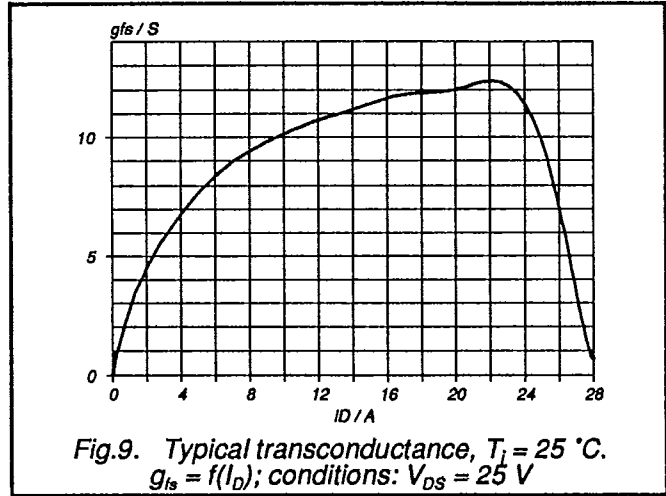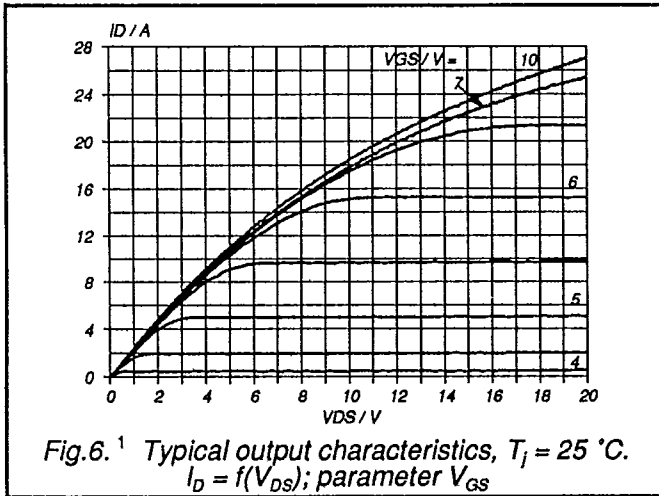

PowerMOS transistor

BUK457-400A  
BUK457-400B

T-39-13

