

1500 Watts

GFR Series



- 1U Blind-Mate, Hotswap, Redundant
- All Models Share Same Compact Size
- 56 V Power Over Ethernet Compatible Model
- Up to 6 kW in 1U (Rack Available)
- AC OK, DC OK, Inhibit, Enable, 5 V Standby
- Current Share & I²C Interface
- 3 Year Warranty

Specification

Input

Input Voltage	• 85-264 VAC, see derating curve
Input Frequency	• 47-63 Hz
Input Current	• 13 A/6.5 A typical at 115/230 VAC
Inrush Current	• 35 A maximum at 264 VAC
Power Factor	• >0.9
Earth Leakage Current	• 1.5 mA max 264 VAC 60Hz
Input Protection	• Internal T20 A/250 V fuse in line and neutral

Output

Output Voltage	• See model table
Output Voltage Trim	• Via potentiometer, see model table
Initial Set Accuracy	• $\pm 1\%$ of nominal with 50% load
Minimum Load	• No minimum load required
Line Regulation	• $\pm 0.5\%$ maximum
Load Regulation	• V1: $\pm 0.5\%$, V2: $\pm 5\%$
Start Up Delay	• 1 s typical
Over/Undershoot	• 0.5% typical
Transient Response	• 4% deviation, recovery to within 2% in 500 μ s for 50-75-50% load change
Ripple & Noise	• 24-56 V models: 1% max pk-pk 12 V models: 2% max pk-pk V Standby: 3% max pk-pk, 20 MHz bandwidth
Overvoltage Protection	• 115-140% of V1 nominal, recycle input AC to reset
Overtemperature Protection	• Protects the unit against overtemperature. Auto restart
Overcurrent Protection	• 110 - 140% V1, V Standby power limited
Short Circuit Protection	• Continuous, trip and restart (hiccup mode)
Temperature Coefficient	• 0.02%/°C (after 20 minute warm up)
Remote Sense	• Compensates for 0.5V total drop
Current Share	• Share up to 8 units maximum, units share current within 10% of each other at full load.

General

Efficiency	• 90% typical
Isolation	• 3000 VAC Input to Output, 4000 VAC Input to Output (48-56 V) 1500 VAC Input to Ground, 500 VDC Output to Ground 1500 VAC Output to Ground (48-56 V)
Switching Frequency	• 70 kHz PFC typical, 130 kHz main converter typical
Power Density	• 18 W/in ³
Signals	• AC OK, DC OK, Inhibit, Enable, I ² C (see Signals page 3 & 4)
MTBF	• 470 Khrs to TELECORDIA SR-332, 25 °C, GB

Environmental

Operating Temperature	• -20 °C to +70 °C, derate linearly from +50 °C at 2.5 %/°C to 50% load at +70 °C
Cooling	• Internal load dependant variable speed fans
Operating Humidity	• 95% RH, non-condensing
Storage Temperature	• -40 °C to +85 °C
Operating Altitude	• 3000 m
Shock	• ± 3 shocks in each axis (total 18 shocks) 30 g 11 ms (half sine). Compliant with EN60068-2-27.
Vibration	• 2 g 10-500 Hz 10 sweeps. Compliant with EN60068-2-6.

EMC & Safety

Emissions	• EN55022 class A conducted & radiated ⁽¹⁾
Immunity	• Compliant with EN61204-3:2000 high severity levels
Harmonic Currents	• EN61000-3-2 class A EN61000-3-2 class C for loads >20%
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, level 3, Perf Criteria A
Radiated Immunity	• EN61000-4-3, level 3 Perf Criteria A
EFT/Burst	• EN61000-4-4, installation class 3, Perf Criteria A
Surge	• EN61000-4-5, level 3 Perf Criteria A
Conducted Immunity	• EN61000-4-6, level 3, Perf Criteria A
Dips & Interruptions	• EN61000-4-11, 30% 10 ms, 60% 100 ms, 100% 5000 ms, Perf Criteria A, B, B. Semi F47 Compliant.
Safety Approvals	• IEC60950-1: CB Report, CSA-C22.2 No. 60950-1-05, UL60950-1, TUV EN60950-1.

Notes


1. Contact sales for class B conducted emissions performance.

Models and Ratings

GFR1K5 **XP**

Output Power	Output Voltage V1	Voltage Adj V1	Output Current V1		Standby Supply V2	Model Number
			90-264 VAC	>180 VAC		
1200 W	12.0 VDC	11-14 V	100 A	100 A	5 V/1 A	GFR1K5PS12
1500 W	24.0 VDC	22-28 V	50 A	63 A	5 V/1 A	GFR1K5PS24
1500 W	48.0 VDC	45-52 V	25 A	31 A	5 V/1 A	GFR1K5PS48
1500 W	56.0 VDC	54-59 V	22 A	27 A	5 V/1 A	GFR1K5PS56

Mechanical Details

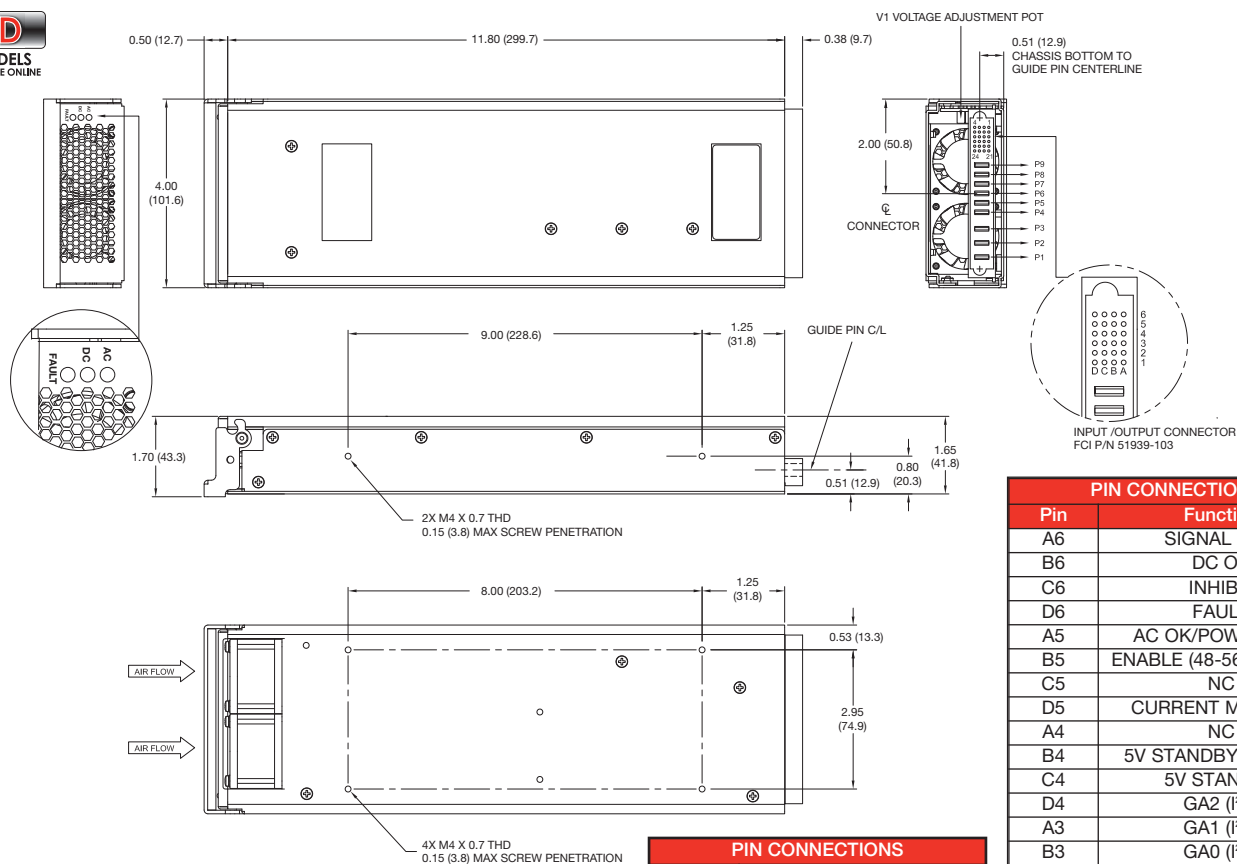

PIN CONNECTIONS

Pin	Function
A6	SIGNAL GND
B6	DC OK
C6	INHIBIT
D6	FAULT
A5	AC OK/POWER FAIL
B5	ENABLE (48-56 V models)
C5	NC
D5	CURRENT MONITOR
A4	NC
B4	5V STANDBY RETURN
C4	5V STANDBY
D4	GA2 (I ² C)
A3	GA1 (I ² C)
B3	GA0 (I ² C)
C3	I ² C GND
D3	PMB SDA (DATALINE)
A2	PMB SCL (CLOCK)
B2	PWR ID
C2	V TRIM
D2	ENABLE (12-24 V models)
A1	CURRENT SHARE
B1	NC
C1	- SENSE
D1	+ SENSE

PIN CONNECTIONS


Pin	Function
P1	AC NEUTRAL
P2	AC LINE
P3	CHASSIS GND
P4	-VOUT
P5	-VOUT
P6	-VOUT
P7	+VOUT
P8	+VOUT
P9	+VOUT

Notes


- All dimensions are in inches (mm).
Tolerance X.XX = ± 0.02 (0.50); X.XXX = ± 0.01 (0.25)
- Weight 5.2 lb (2.35 kg).
- Output connector: BERG/FCI P/N 51939-103LF
Mating connector: BERG/FCI P/N 51866-025LF right-angle PCB receptacle

Derating Curves

Input Derating Curve

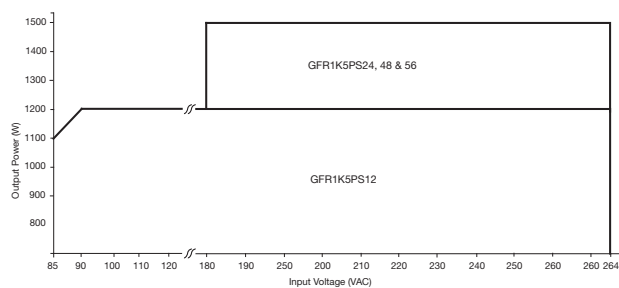

Thermal Derating Curve

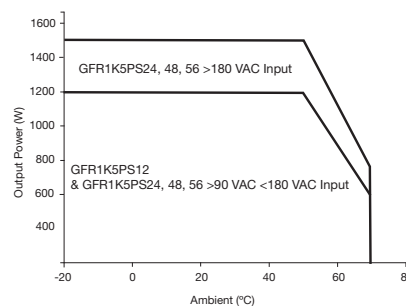


Signals

AC OK/Power Fail

AC OK is an isolated signal providing a minimum of 5 ms warning of loss of output regulation. The signal is fully isolated and the collector and emitter must be connected externally.


Maximum sink current 2 mA, maximum voltage 20 V.

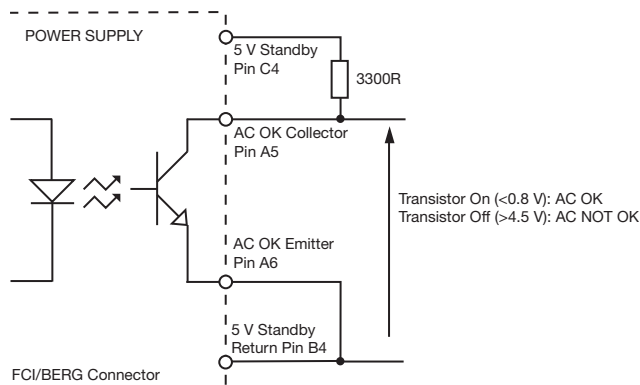

DC OK


DC OK is an isolated signal providing warning that the output voltage has fallen below 90% of nominal. The signal is fully isolated and the collector and emitter must be connected externally.

Maximum sink current 2 mA, maximum voltage 20 V.

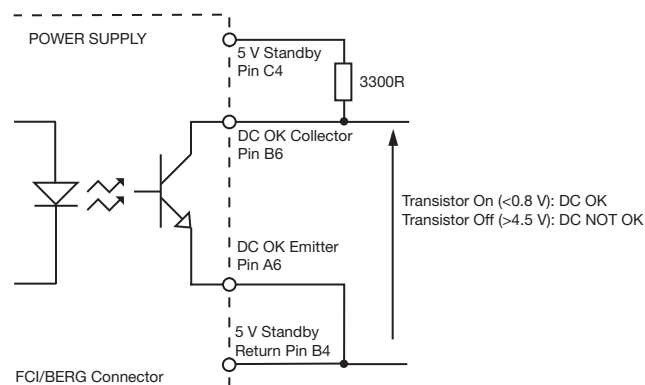

Inhibit


Inhibit is an isolated control signal which can turn the power supply off by supplying 2 to 5 mA into the pin.

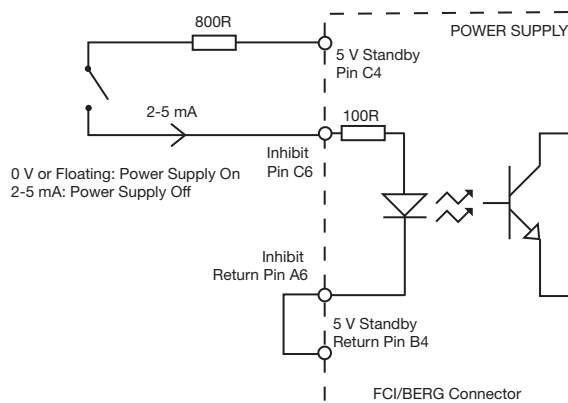

Fault


Fault is an isolated signal providing warning of either Power Fail, DC Fail or Fan Fault. The signal is fully isolated and the collector and emitter must be connected externally.

Maximum sink current 2 mA, maximum voltage 20 V.

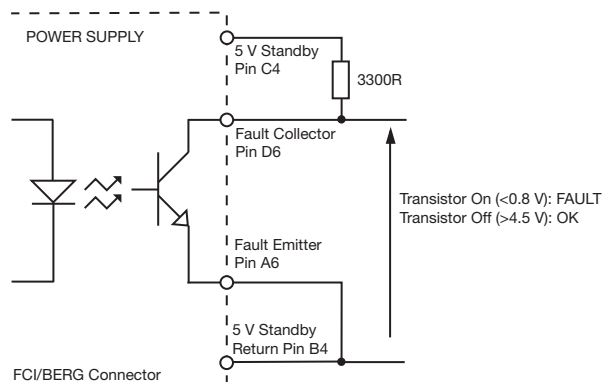


V Program

V Program allows remote voltage adjustment within the range $\pm 10\%$

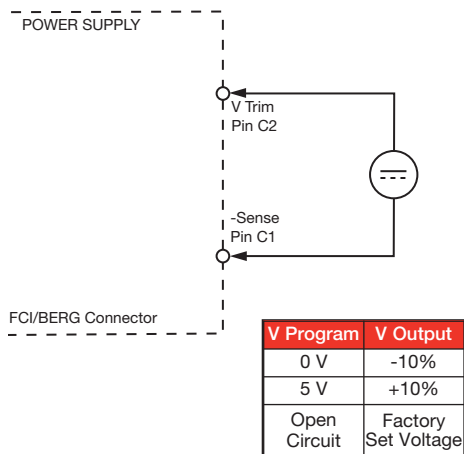

Current Monitor

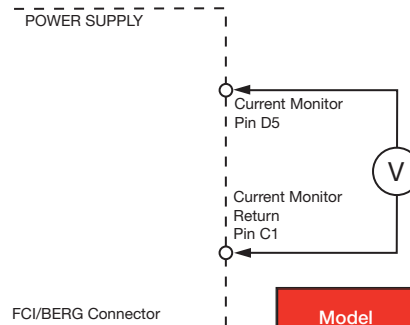

Model	Current Monitor	Approx Output Current
GFR1K5PS12	1.5 V	0%
	4.5 V	100%
GFR1K5PS48	0.3 V	0%
	4.5 V	100%

