

Double Balanced Mixer

Multi-Octave Band

Model MM9xMS-3

Model MM9xMS-13

RF 4.0 to 20.0 GHz



Electrical Specifications ⁽¹⁾:

Parameter	Conditions			Specifications		
	RF(GHz)	LO(GHz)	IF(MHz)	Min	Typical	Max
SSB Conversion loss: ^{(2) (3)}	5.0-18.5	5.0-18.5	DC-500		6.5 dB	8.0 dB
	5.0-18.5	5.0-18.5	DC-2000		7.0 dB	8.5 dB
	5.0-18.5	5.0-18.5	DC-4000		8.0 dB	9.5 dB
	4.0-20.0	4.0-20.0	DC-500		7.0 dB	9.5 dB
	4.0-20.0	4.0-20.0	DC-2000		7.5 dB	10.0 dB
Isolation		4.0-5.0		20 dB	30 dB	
		5.0-20.0		25 dB	38 dB	
		4.0-7.0		16 dB	21 dB	
LO to RF:		7.0-20.0	20 dB	27 dB		
LO to IF:				20 dB		
RF to IF:	4.0-20.0					
Input 1-dB Compression Point:	4.0-20.0	4.0-20.0	DC-4000		+2 dBm	MM93
					+5 dBm	MM94
					+8 dBm	MM96
					+12 dBm	MM97
					+11 dBm	MM93
Input Third Order Intercept Point:	4.0-20.0	4.0-20.0	DC-4000		+14 dBm	MM94
					+18 dBm	MM96
					+21 dBm	MM97
					+11 dBm	MM93
LO Power: ⁽⁴⁾	4.0-20.0	4.0-20.0	DC-4000		+7 dBm	MM93
					+10 dBm	MM94
					+14 dBm	MM96
					+18 dBm	MM97

LO Power
 3 = +7 dBm
 4 = +10 dBm
 6 = +14 dBm
 7 = +18 dBm

Notes:

- Specifications are guaranteed when tested as a downconverter in a 50 Ohm system at +25°C with the nominal LO power. Specifications indicated as typical are not guaranteed.
- Noise figure is typically within ±0.5 dB of conversion loss for IF frequencies greater than 10 MHz.
- Conversion loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
- Usable LO drives are up to 2 dB below and 3 dB above nominal.

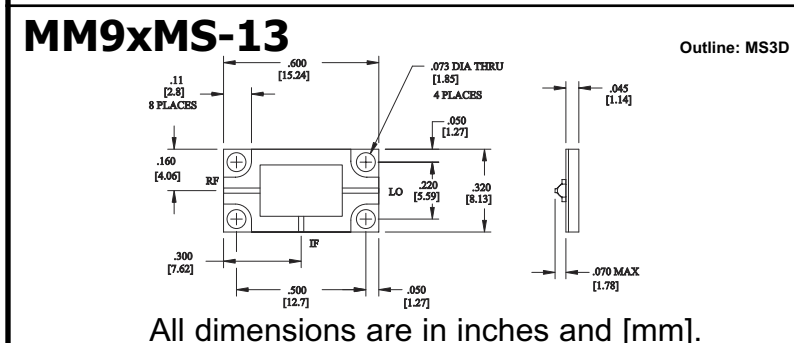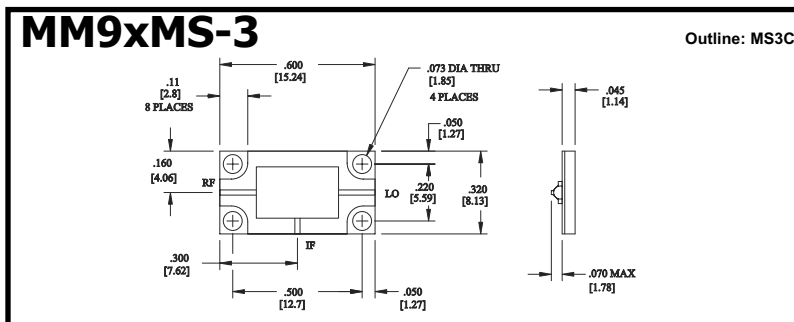

All dimensions are in inches and [mm].

Typical Performance at 25°C

