
GHz BGA Socket - Direct mount, solderless


Features


- Directly mounts to target PCB (needs tooling holes) with hardware
 High speed, reliable Elastomer connection
 Minimum real estate required

- Compression plate distributes forces evenlyHinged clamshell socket lid



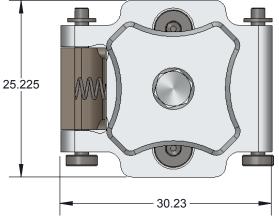

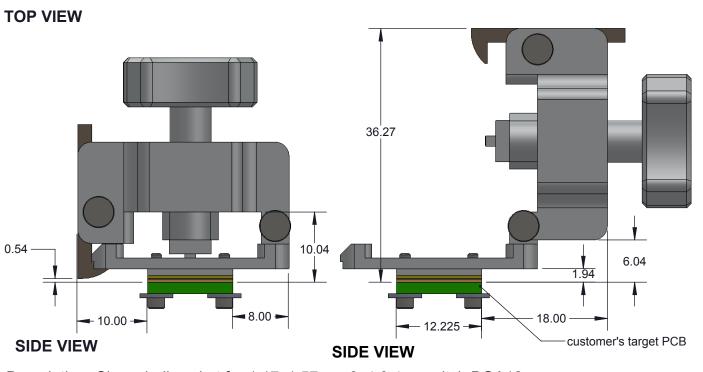

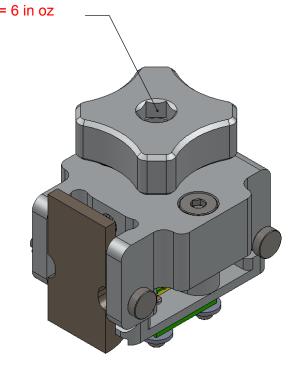

Description: Clam shell socket for 1.17x1.57mm 3x4 0.4mm pitch BGA12


Primary dimension units are millimeters, Secondary dimension units are [inches], Weight is in grams.

Tolerances: Hole diameters ±0.03mm [±0.001"], Pitches (from true position) ±0.025mm [±0.001"], substrate thickness tolerance ±10%, all other tolerances ±0.13mm [±0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

С	G-BGA-5024 Drawing
•	Ironwood Electronics, Inc Tele: (800) 404-0204 www.ironwoodelectronics.c

Material: N/A Finish: N/A tronics, Inc. Weight: 33.10 404-0204 lectronics.com

STATUS: Released	SHEET: 1 OF 4	REV. B
ENG: E. Smolentseva	DRAWN BY: M. Raske	SCALE: 1.85:1
FILE: CG-BGA-5024 Dwg	DATE: 12/22/2014	

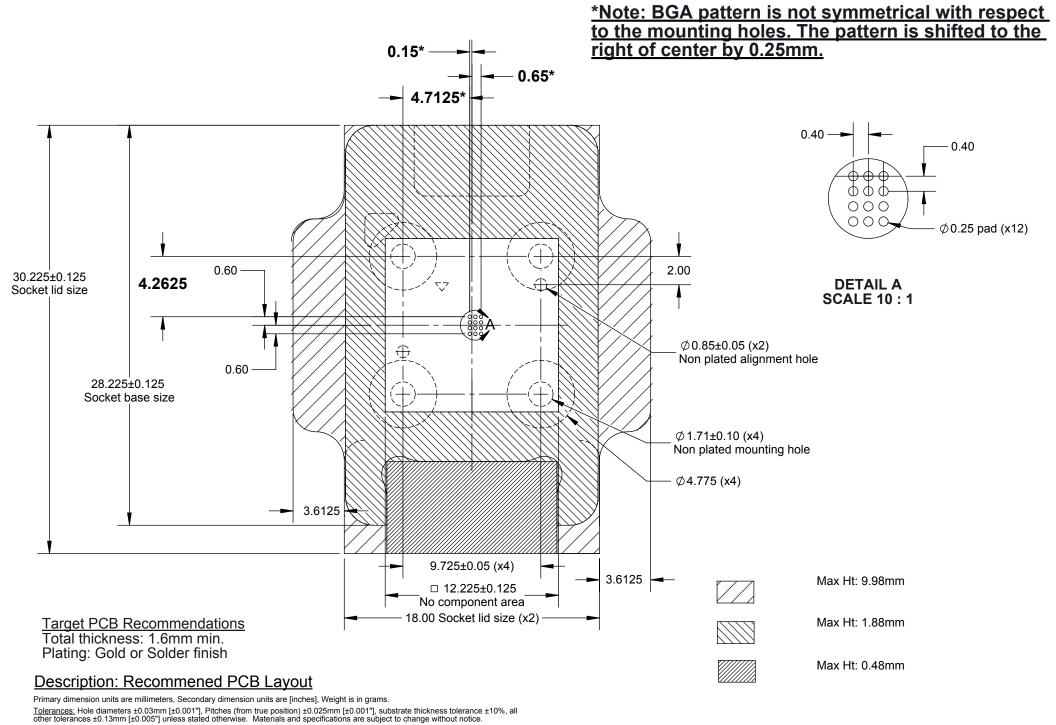



CG-BGA-5024 Drawing


Ironwood Electronics, Inc. Tele: (800) 404-0204 www.ironwoodelectronics.com Material: N/A Finish: N/A Weight: 33.10

STATUS: Released	SHEET: 2 OF 4	REV. B
ENG: E. Smolentseva	DRAWN BY: M. Raske	SCALE: 3.75:1
FILE: CG-BGA-5024 Dwg	DATE: 12/22/2014	

TOP VIEW SIDE VIEW BOTTOM VIEW

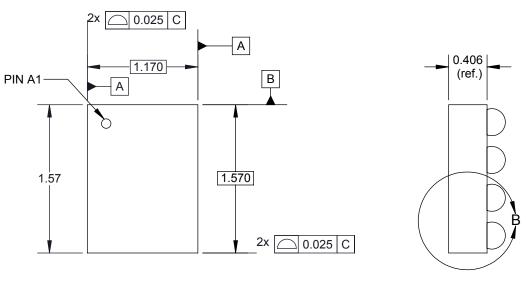

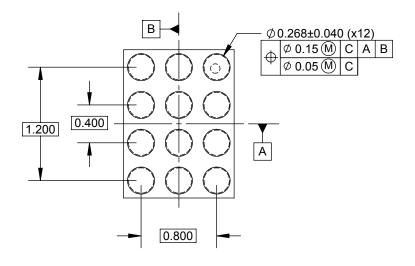

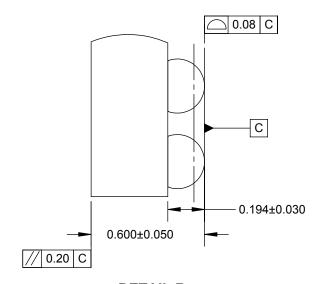

Description: Compatible device


Primary dimension units are millimeters, Secondary dimension units are [inches], Weight is in grams.

DETAIL B SCALE 50 : 1

Tolerances:

.xx ±0.05 .xxx ±0.012

CG-BGA-5024 Drawing Material: N/A Finish: N/A Weight: 33.10 Material: N/A Finish: N/A Weight: 33.10 Material: N/A Finish: N/A Weight: 33.10 STATUS: Released SHEET: 3 OF 4 REV. B ENG: E. Smolentseva DRAWN BY: M. Raske SCALE: 25:1 FILE: CG-BGA-5024 Dwg DATE: 12/22/2014

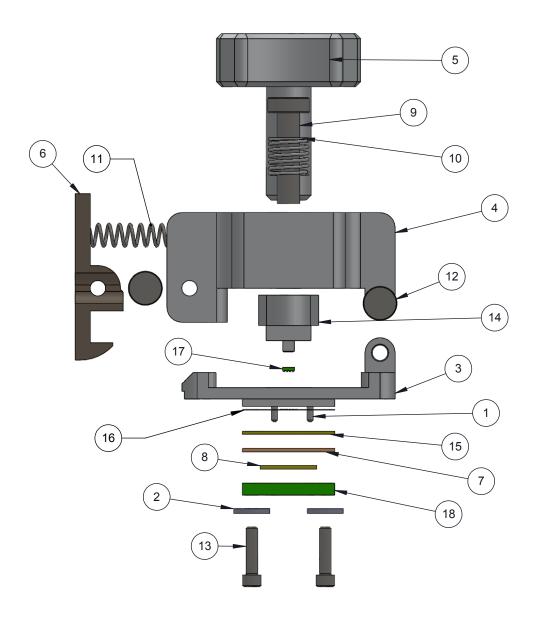

ITEM NO.	DESCRIPTION	Material
1	Alignment Pin 1/32" dia. x 1/8" lng	Chrome Stainless Steel
2	Washer, #0 x .025", Nylon	Nylon 6/6
3	Socket Base	7075-T6 Aluminum Alloy
4	Clam Shell Lid	7075-T6 Aluminum Alloy
5	Fluted Knob Compression Screw	7075-T6 Aluminum Alloy
6	Latch, Ni plated	7075-T6 Aluminum Alloy
7	Elastomer Guide 7x7mm	Ultem
8	0.5mm thick, 0.05x 0.05mm pitch, 50mm sqr, Z-axis conductive angled elastomer	20 Micron dia gold plated brass filaments arranged symettrically in a silicon rubber (63.5 degree angle), Thickness: 0.5mm
9	Screw, M3 x 12mm, Low Head Cap, SS	18-8 Stainless Steel
10	Spring Clamshell lid assembly	Steel Music Wire
11	Precision Compression Spring, Zinc-Plated Music Wire, 1/2" Length, .12" OD, .016" Wire	Zinc Plated Music Wire
12	Hinge Pin and Snap Ring, 2mm OD, 19mm long, SS	Stainless Steel (ferritic)
13	#0-80 X .25 LG, SOC HD CAP SCREW, ALLOY STL, BLK OXIDE	Alloy Steel
14	Compression Plate with step	7075-T6 Aluminum Alloy
15	IC Guide	Torlon 4203
16	Ball Guide	Kapton Polyimide/Cirlex
17	Customer's device	FR4 High temp
18	Customer's target PCB	FR4 High temp

Description: Socket Detail

Primary dimension units are millimeters, Secondary dimension units are [inches], Weight is in grams.

Tolerances: Hole diameters ±0.03mm [±0.001"], Pitches (from true position) ±0.025mm [±0.001"], substrate thickness tolerance ±10%, all other tolerances ±0.13mm [±0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

Rev	Date	Initials	Description	
Α	9/3/14	ELS	Original	
В	06/15/15	DH	Updated page 1 and 2 to show dimension.	updated socket width

	CG-BGA-5024 Drawing		
	•	Ironwood Electronics, Inc Tele: (800) 404-0204 www.ironwoodelectronics.c	

Ironwood Electronics, Inc. Tele: (800) 404-0204 www.ironwoodelectronics.com

Material: N/A Finish: N/A Weight: 33.10

	STATUS: Released	SHEET: 4 OF 4	REV. B	
	ENG: E. Smolentseva	DRAWN BY: M. Raske	SCALE: 2:1	
	FILE: CG-BGA-5024 Dwg	DATE: 12/22/2014		