
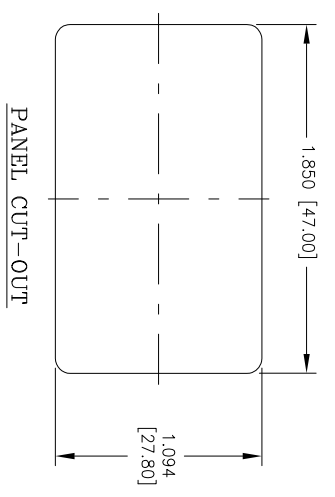
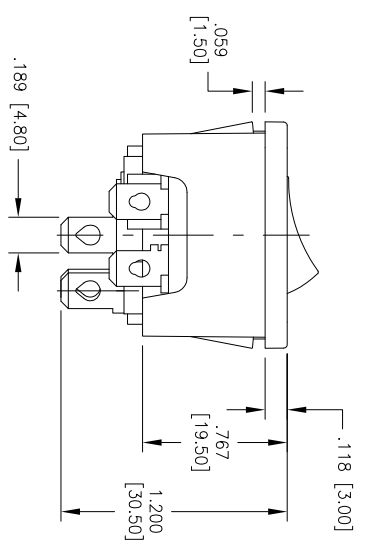
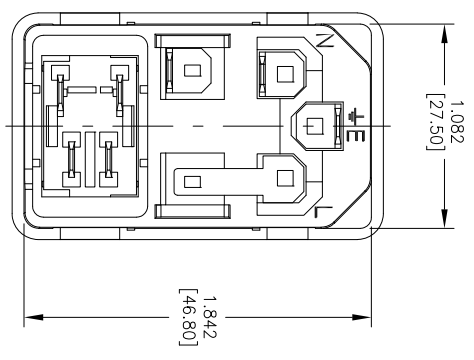
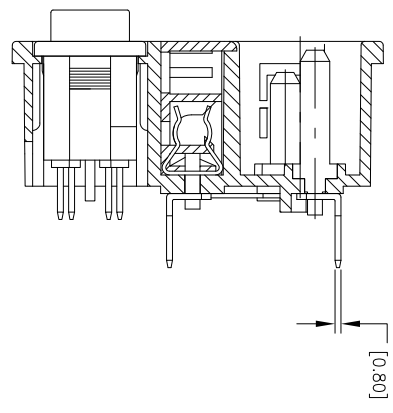


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/08/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

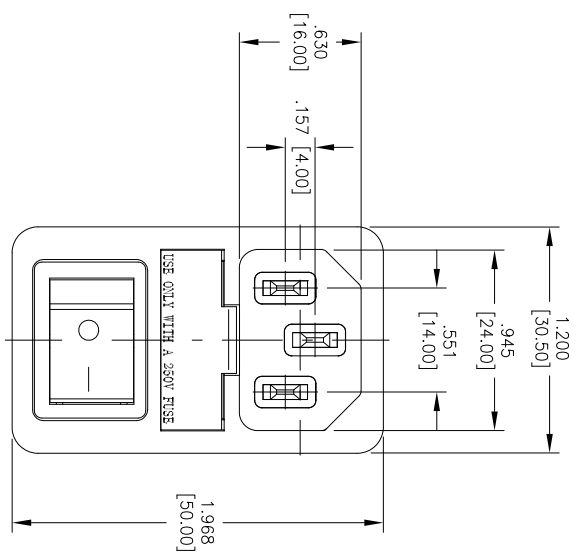

**SPECIFICATIONS:**

**Material:**  
 Insulator: Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Plating:  
 Tin over Copper underplate  
**Electrical:**  
 Operating voltage: 250 VAC max  
 Current rating: 15 Amps max  
 Insulation resistance: 100 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 2000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -65°C to +125°C  
**Environmental:**  
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLE
X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	12/08/09
CHECKED	
APPROVED	

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**IEC CONNECTOR, ISOLATED FUSE**  
**1.50mm SNAP IN, .187" [4.8] QC TERMINAL**

TITLE	SIZE	PART NO.	REV.
	X	IEC-GS-1-150	-
REF:	SCALE:	NTS	SHEET 1 OF 1

