SML100HB06



Attributes:
-aerospace build standard
-high reliability
-lightweight
-metal matrix base plate
-AlN isolation

Maximum rated values/ Electrical Properties

Collector-emitter Voltage		V_{ces}	600	V
DC Collector Current	Tc=75C Tc=25C	I_c, nom Ic	100 130	A
Repetitive peak Collector Current	tp=1msec,Tc=75C	I_{crm}	200	A
Total PowerDissipation	Tc=25C	P_{tot}	340	W
Gate-emitter peak voltage		V_{ges}	+/-20	V
DC Forward Diode Current		I_f	100	A
Repetitive Peak Forward Current	tp=1msec	I_{frm}	200	A
I^2t value per diode	Vr=0V, tp=10msec, Tvj=125C	I^2_t	1250	A^2sec
Isolation test voltage	RMS, 50Hz, t=1min	V_{isol}	2500	V

Collector-emitter saturation voltage	Ic=75A,Vge=15V, Tc=25C Ic=75A,Vge=15V,Tc=125C	$V_{ce(sat)}$		1.95 2.2	2.45	V
Gate Threshold voltage	Vce=Vge, Tvj=25C	$V_{ge(th)}$	4.5	5.5	6.5	V
Input capacitance	f=1MHz,Tvj=25C,Vce=25V, Vge=0V	C_{ies}		4.3		nF
Reverse transfer Capacitance	f=1MHz,Tvj=25C,Vce=25V, Vge=0V	Cres		0.4		nF
Collector emitter cut off current	Vce=600V,Vge=0V,Tvj=25C Vce=600V,Vge=0V,Tvj=125C	I_{ces}		1 1	500	µA
Gate emitter cut off current	Vce=0V,Vge=20V,Tvj=25C	I_{ges}			400	µA

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders


Turn on delay time	Ic=100A, Vcc=300V Vge=+/15V,Rg=2.2Ω,Tvj=25C Vge=+/-15V,Rg=2.2Ω,Tvj=125C	$t_{d,on}$		25 26		nsec nsec
Rise time	Ic=100A, Vcc=300V Vge=+/-15V,Rg=2.2Ω,Tvj=25C Vge=+/-15V,Rg=2.2Ω,Tvj=125C	tr		10 11		nsec nsec
Turn off delay time	Ic=100A, Vcc=300V Vge=+/-15V,Rg=2.2Ω,Tvj=25C Vge=+/-15V,Rg=2.2Ω,Tvj=125C	td,off		130 150		nsec nsec
Fall time	Ic=100A, Vcc=300V Vge=+/-15V,Rg=2.2Ω,Tvj=25C Vge=+/-15V,Rg=2.2Ω,Tvj=125C	tf		20 30		nsec nsec
Turn energy loss per pulse	Ic=75A,Vce=300V,Vge=15V Rge=2.7Ω,Tvj=125C,L=35nH	Eon		1.0		mJ
Turn off energy loss per pulse	Ic=75A,Vce=300V, Vge=15V Rge=Ω,Tvj=125C,L=30nH	Eoff		2.9		mJ
SC Data	tp≤10µsec, Vge≤15V Tvj≤125C,Vcc=360V,Vce(max)-Vces-Lσdi/dT	Isc		450		A
Stray Module inductance		Lσce		40		nH
Terminal-chip resistance		Rc		1.0		mΩ

Diode characteristics

Forward voltage	Ic=75A,Vge=0V, Tc=25C Ic=75A,Vge=0V, Tc=125C	V_f		1.25 1.2	1.6	V
Peak reverse recovery current	If=75A, -di/dt=3000A/µsec Vce=300V,Vge=-10V,Tvj=25C Vce=300V,Vge=-10V,Tvj=125C	I_{rm}		150 180		A
Recovered charge	If=75A, -di/dt=3000A/µsec Vce=600V,Vge=-10V,Tvj=25C Vce=600V,Vge=-10V,Tvj=125C	Q_r		7.7 13		µC
Reverse recovery energy	If=75A, -di/dt=3000A/µsec Vce=600V,Vge=-10V,Tvj=25C Vce=600V,Vge=-10V,Tvj=125C	E_{rec}		 3.2		mJ mJ

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders


Thermal Properties			Min	Typ	Max	
Thermal resistance junction to case	Igbt Diode	$R_{\theta J-C}$			0.37 0.67	K/W
Thermal resistance case to heatsink		$R_{\theta C-hs}$		0.03		K/W
Maximum junction temperature		Tvj			150	C
Maximum operating temperature		Top	-40		125	C
Storage Temperature		Tstg	-40		125	C

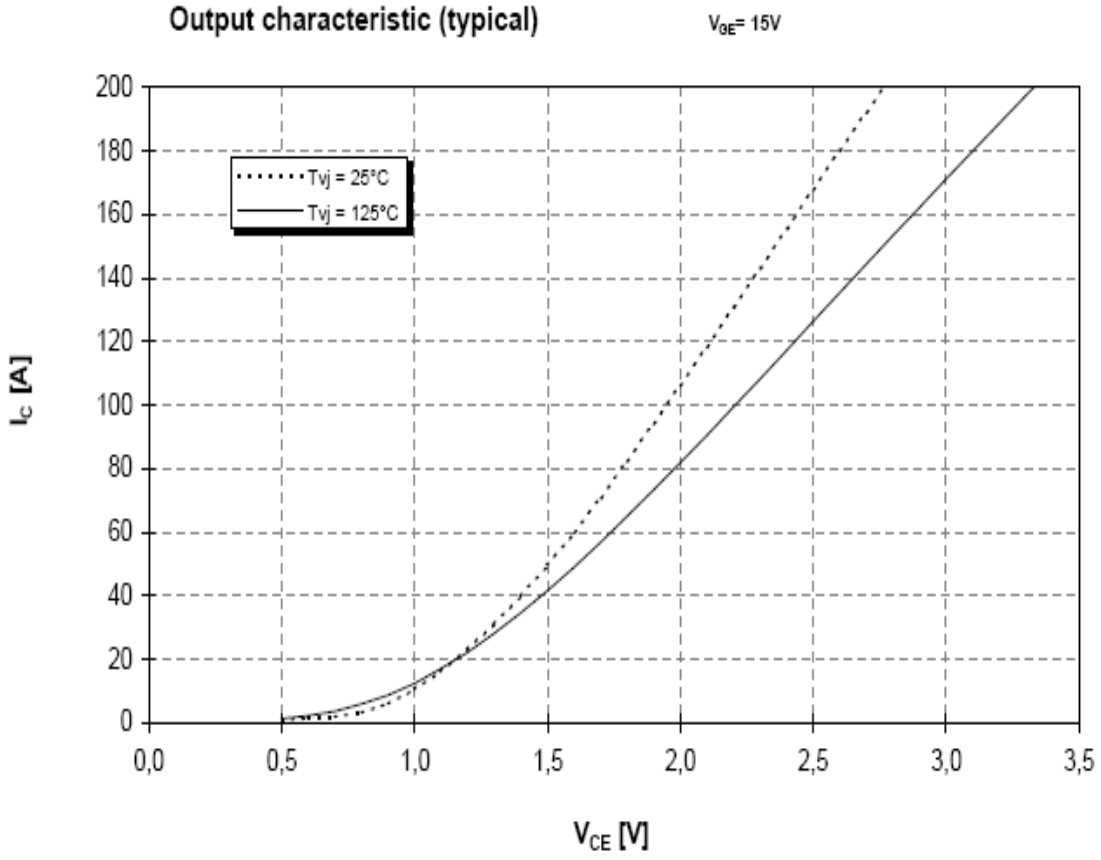

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders


Output characteristic (typical)

T_{vj}= 125°C

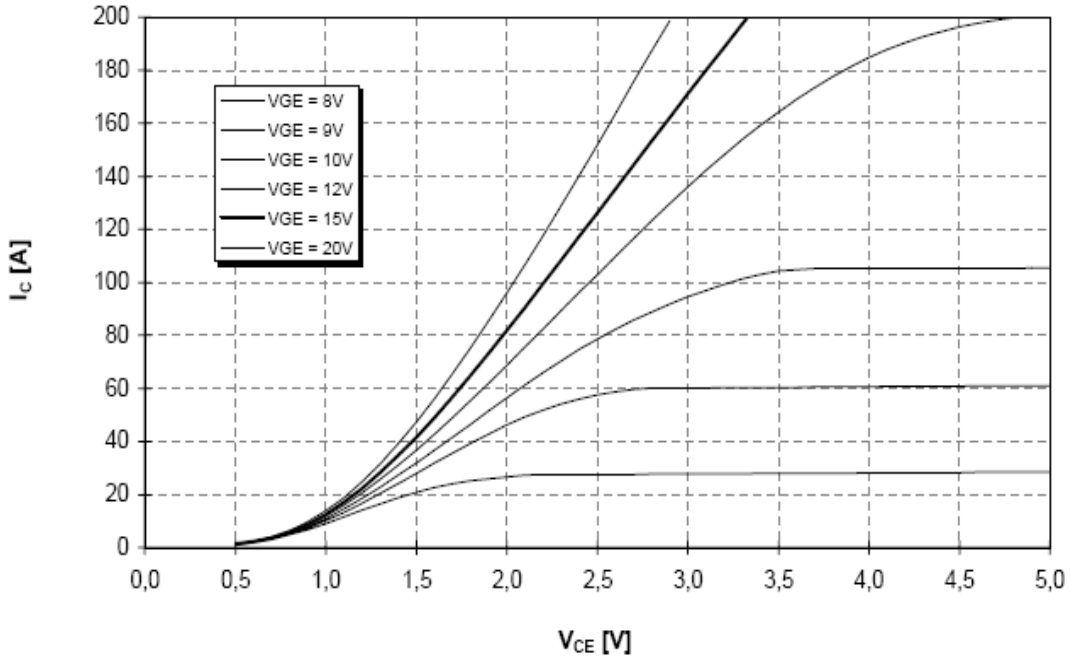


Transfer characteristic (typical)

V_{CE}= 20V

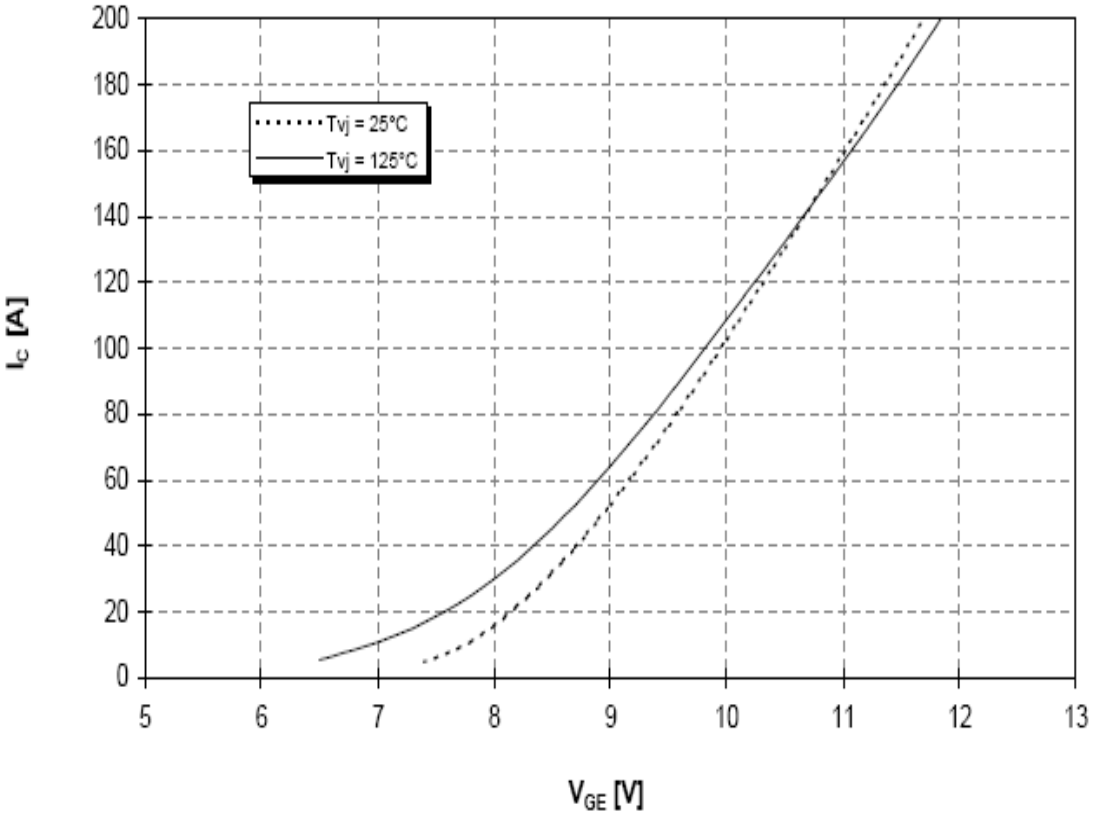


Semelab Plc reserv
l by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Forward characteristic of inverse diode (typical)

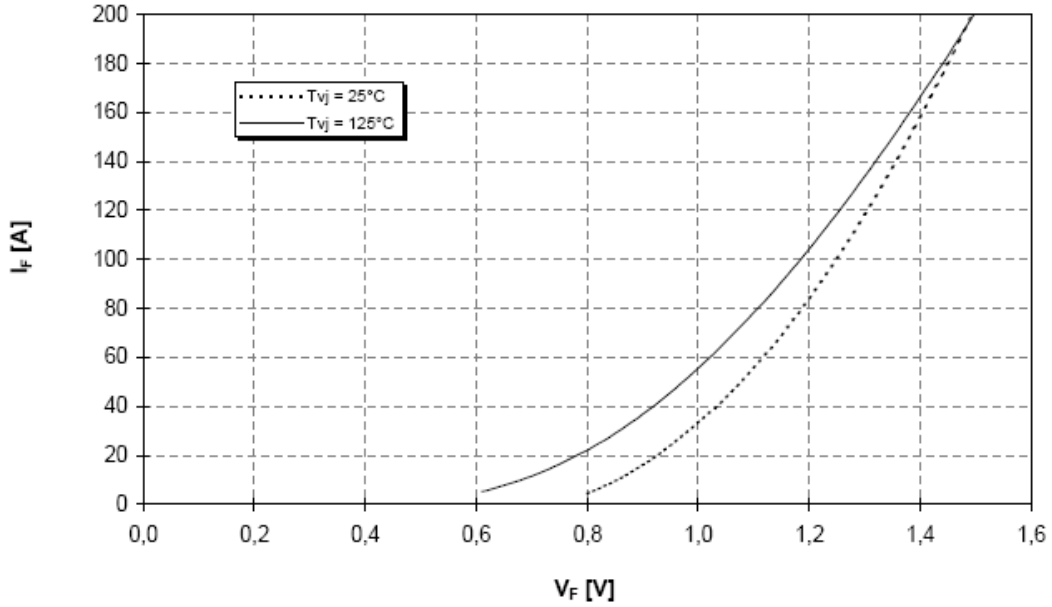

Switching losses (typical)


$R_{G,on}$= 2,2Ω, $R_{G,off}$= 2,2Ω, V_{CC}= 300V, T_{vj}= 125°C

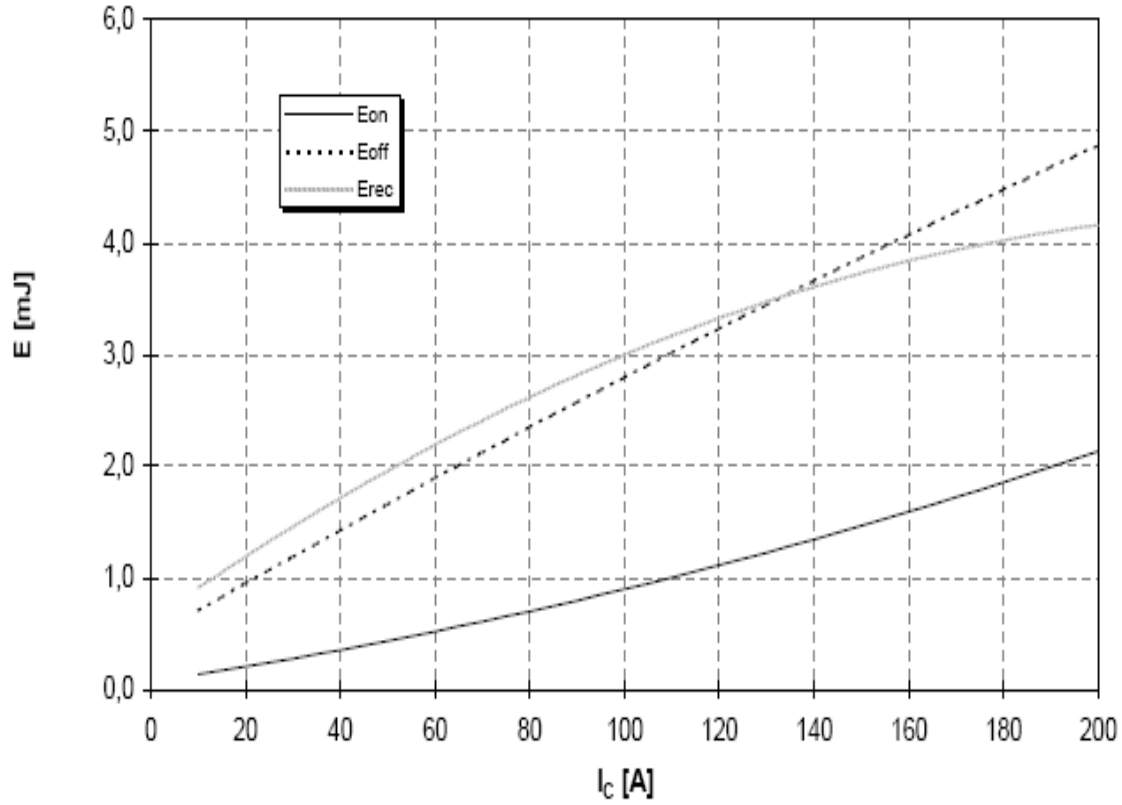

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders


Switching losses (typical)

I_C= 100A , V_{CC}= 300V , T_{vj} = 125°C

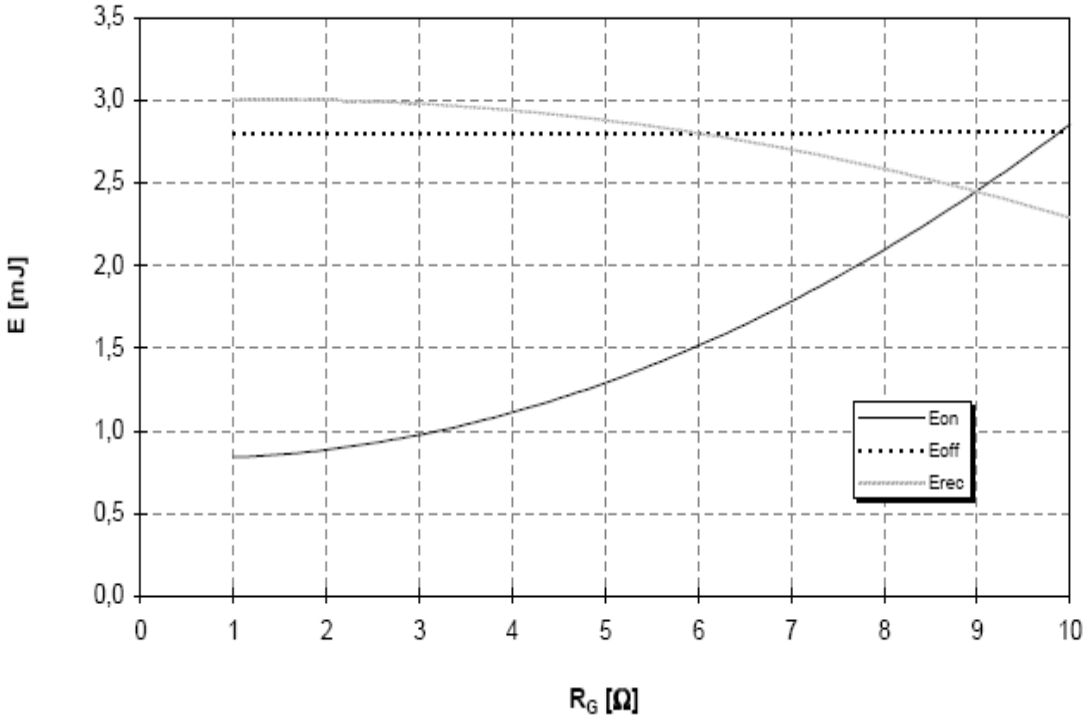


Reverse bias safe operation area (RBSOA)


V_{GE}= +15V, $R_{G,off}$= 2,2Ω, T_{vj}= 125°C

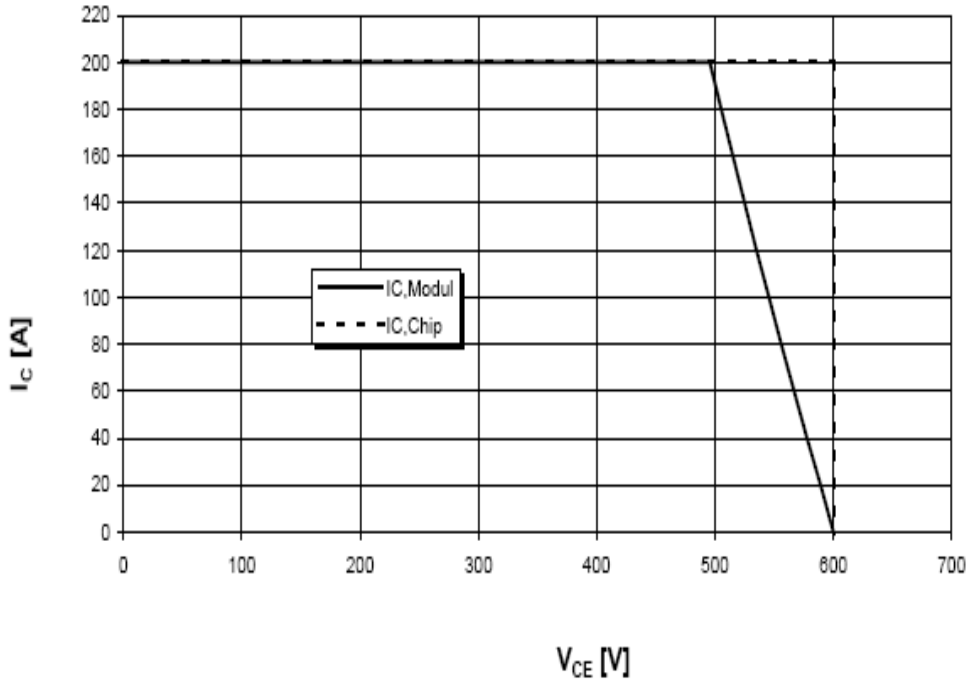

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders

Package outline / Circuit diagram

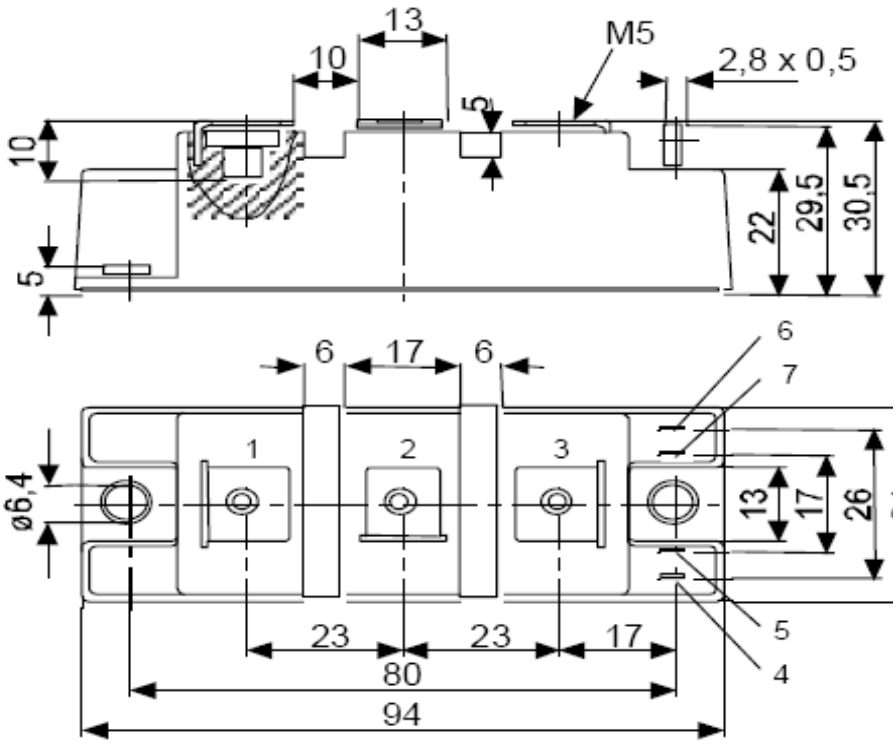

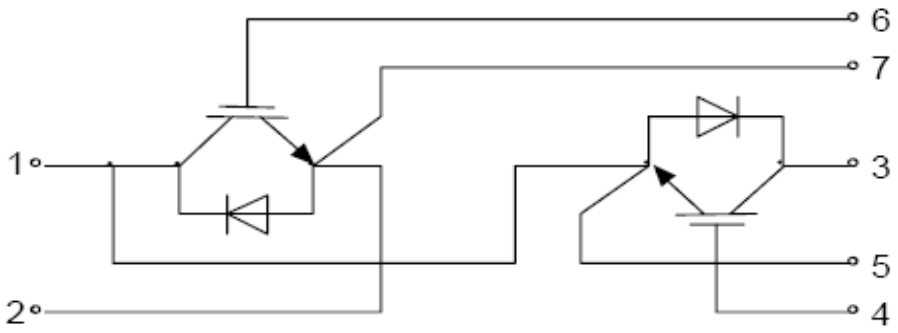

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders