




# HM920-QM87

QM87

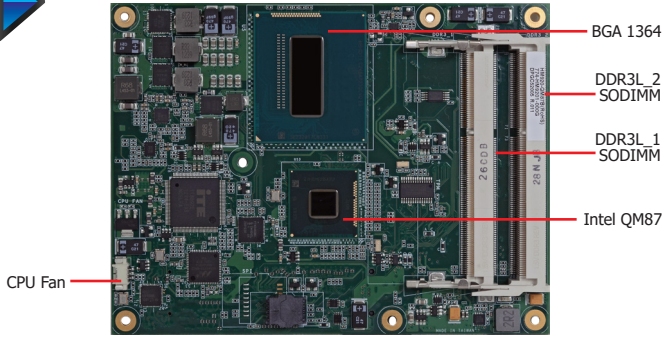


## Features


MEMORY	2 DDR3L SODIMM up to 16GB
EXPANSION	1 PCIe x16, 5 PCIe x1, 4 PCI 1 LPC, 1 SMBus, 1 I <sup>2</sup> C, 1 IDE 1 VGA, 1 LVDS 8 USB 2.0 4 SATA 3.0 SSD (optional) 4-bit input and 4-bit output GPIO
LAN	1 LAN
DIMENSIONS	COM Express® R2.1 Basic, Type 2 95mm x 125mm (3.74" x 4.9")



## Mechanical Drawing

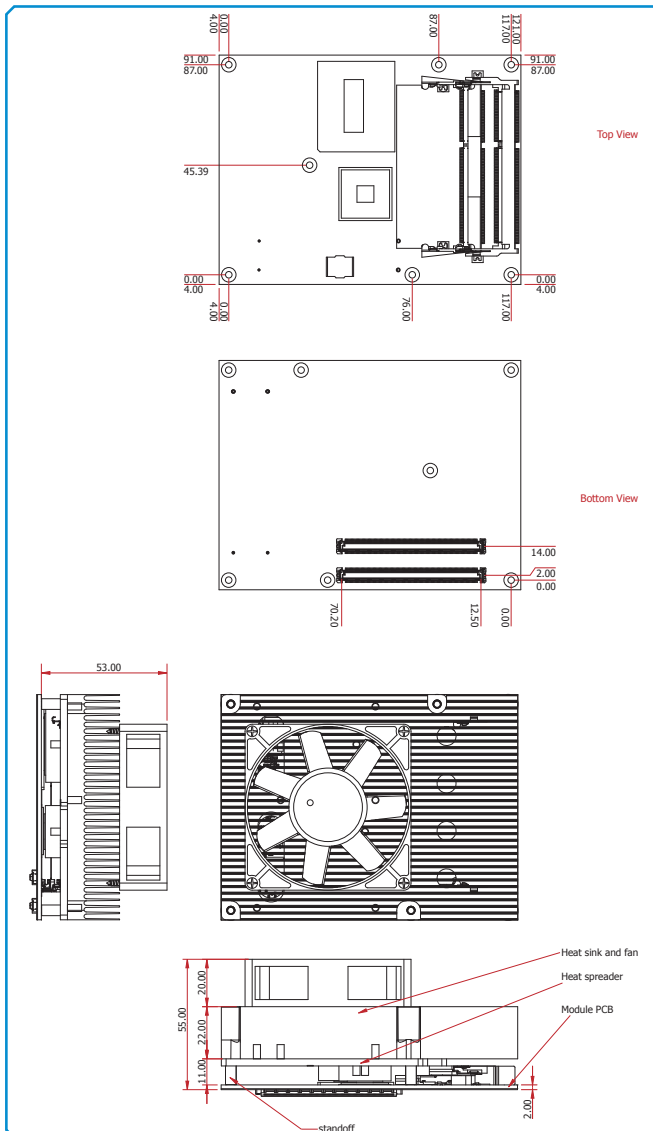

## Block Diagram

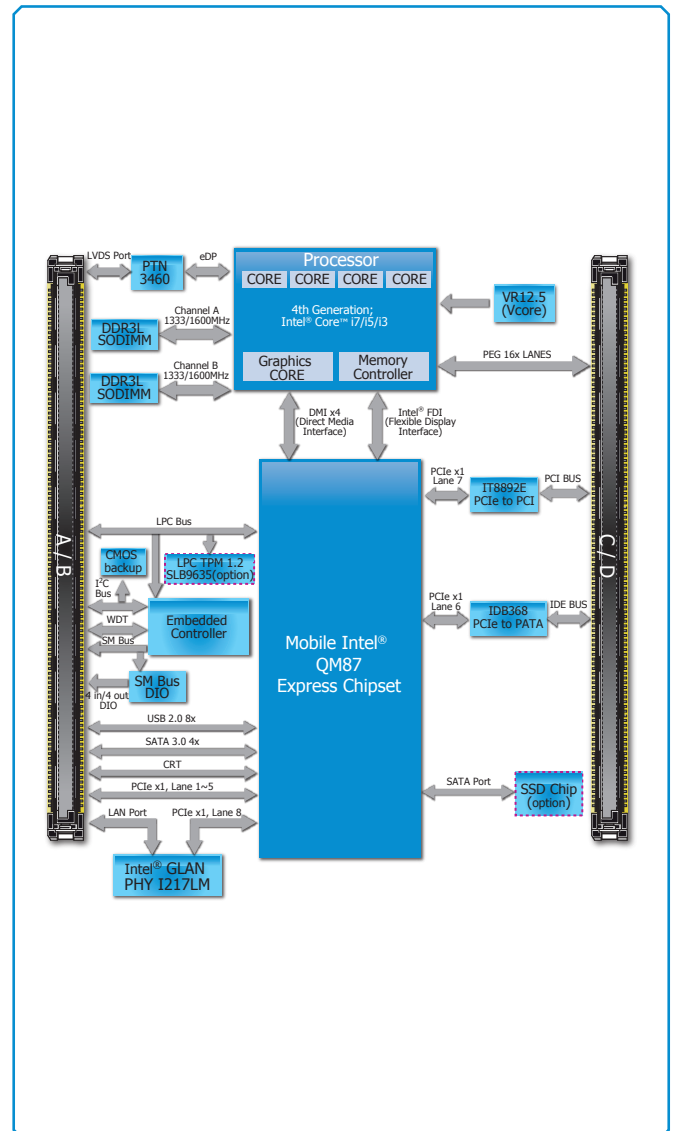

# HM920-QM87

## ► Specifications \* Optional and is not supported in standard model. Please contact your sales representative for more information.

### PROCESSOR

- 4th generation Intel® Core™ processors
  - BGA 1364 packaging technology
  - 22nm process technology
- Please refer to the Ordering Information below*

### CHIPSET

- Intel® QM87 Express Chipset

### SYSTEM MEMORY

- Two 204-pin DDR3L SODIMM sockets
- Supports DDR3L 1333/1600MHz SODIMM
- Supports up to 16GB system memory
- DRAM device technologies: 1Gb, 2Gb and 4Gb DDR3L DRAM technologies are supported for x8 and x16 devices, unbuffered, non-ECC

### ONBOARD GRAPHICS FEATURES

- Intel® HD Graphics 4600
- Supports 1 VGA and 1 LVDS
- VGA: resolution up to 2048x1536 @ 60Hz
- LVDS: NXP PTN3460, 24-bit, dual channel, resolution up to 1920x1200 @ 60Hz
- Intel® Clear Video Technology
- Intel® Advanced Vector Extensions (Intel® AVX) Instructions
- Supports DirectX 11.1, OpenGL 4.0, OpenCL 1.2

### ONBOARD AUDIO FEATURES

- Supports High Definition Audio interface

### ONBOARD LAN FEATURES

- Intel® I217LM with iAMT9.0 Gigabit Ethernet Phy
- Integrated 10/100/1000 transceiver
- Fully compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab

### SERIAL ATA (SATA) INTERFACE

- Supports 4 SATA 3.0 with data transfer rate up to 6Gb/s
- Integrated Advanced Host Controller Interface (AHCI) controller
- Supports RAID 0/1/5/10
- Supports Intel® Smart Response Technology

### SSD\*

- 2GB/4GB/8GB/16GB/32GB/64GB
- Write: 30MB/sec (max), Read: 70MB/sec (max)
- SATA to SSD onboard

### INTEL ACTIVE MANAGEMENT TECHNOLOGY (AMT)

- Supports iAMT9.0
- Out-of-band system access
- Remote troubleshooting and recovery
- Hardware-based agent presence checking
- Proactive alerting
- Remote hardware and software asset tracking

### IDE INTERFACE

- Supports one IDE device
- DMA mode: Ultra ATA up to 100MB/s
- PIO mode: up to 16MB/s

### TRUSTED PLATFORM MODULE (TPM)\*

- Provides a Trusted PC for secure transactions
- Provides software license protection, enforcement and password protection

### EXPANSION INTERFACES

- Supports 8 USB 2.0 interfaces
- Supports 1 PCIe x16 Gen 3 interface
- Supports 5 PCIe x1 interfaces
- Supports 4 PCI interfaces (PCI 2.3)
- Supports LPC interface
- Supports SMBus interface
- Supports I<sup>2</sup>C interface
- Supports IDE interface
- Supports 4-bit input and 4-bit output GPIO

### DAMAGE FREE INTELLIGENCE

- Monitors CPU temperature and overheat alarm
- Monitors CPU fan speed and failure alarm
- Monitors Vcore/1.05V/DDR voltages and failure alarm

### BIOS

- AMI BIOS
- 64Mbit SPI BIOS

### WATCHDOG TIMER

- Software programmable from 1 to 255 seconds

### POWER

- Input: 12V, VCC\_RTC, 5VSB\*

### POWER CONSUMPTION

- TBD

### OS SUPPORT

- Windows XP Professional x86 & SP3 (32-bit) (limited function)
- Windows 7 Ultimate x86 & SP1 (32-bit)
- Windows 7 Ultimate x64 & SP1 (64-bit)
- Windows 8 Enterprise x86 (32-bit)
- Windows 8 Enterprise x64 (64-bit)

### TEMPERATURE

- Operating: 0°C to 60°C
- Storage: -20°C to 85°C

### HUMIDITY

- 5% to 90%

### MTBF

- 727,289 hrs @ 25°C; 420,729 hrs @ 45°C
- Calculation model: Telcordia Issue 2, Method I Case 3
- Environment: GB, GC – Ground Benign, Controlled

### PCB

- Dimensions
  - COM Express® Basic
  - 95mm (3.74") x 125mm (4.9")
- Compliance
  - PICMG COM Express® R2.1, Type 2

### CERTIFICATION

- CE
- FCC Class B
- RoHS

## ► Ordering Information

Model Name	Processor	Memory	SSD	Power	Thermal	Temperature
HM920-QM87BS0-4700EQ	Intel® Core™ i7-4700EQ, 6M Cache, 2.4GHz (3.4GHz), 47W	2 SODIMM	None	ATX/AT	None	0°C to 60°C
HM920-QM87BS0-4700EQ	Intel® Core™ i7-4700EQ, 6M Cache, 2.4GHz (3.4GHz), 47W	2 SODIMM	None	ATX/AT	Cooler	0°C to 60°C
HM920-QM87BS0-4400E	Intel® Core™ i5-4400E, 3M Cache, 2.7GHz (3.3GHz), 37W	2 SODIMM	None	ATX/AT	None	0°C to 60°C
HM920-QM87BS0-4400E	Intel® Core™ i5-4400E, 3M Cache, 2.7GHz (3.3GHz), 37W	2 SODIMM	None	ATX/AT	Cooler	0°C to 60°C
HM920-QM87BS0-4402E	Intel® Core™ i5-4402E, 3M Cache, 1.6GHz (2.7GHz), 25W	2 SODIMM	None	ATX/AT	None	0°C to 60°C
HM920-QM87BS0-4402E	Intel® Core™ i5-4402E, 3M Cache, 1.6GHz (2.7GHz), 25W	2 SODIMM	None	ATX/AT	Cooler	0°C to 60°C

## ► Packing List

- 1 HM920 board
- Heat spreader with heat sink and fan: 761-HSWMBL-000G

## ► Optional Items

- COM330-B carrier board kit: 770-COM330-000G
- Heat spreader: A71-011029-000G