


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

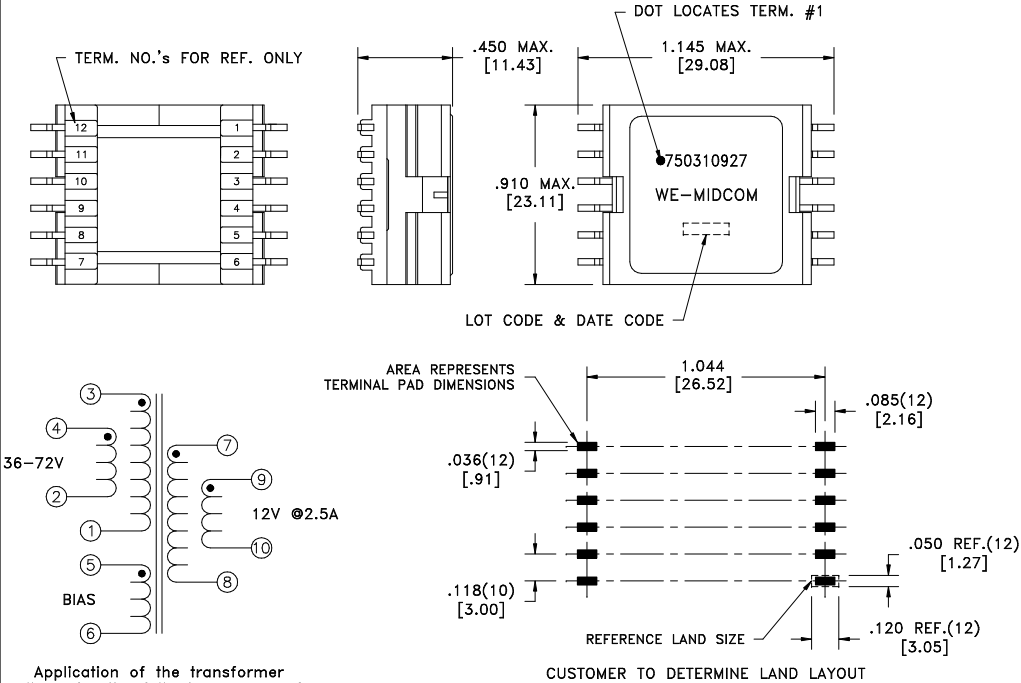

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 tie(1+2, 3+4), @20°C	0.150 ohms max.
D.C. RESISTANCE	5-6 @20°C	0.070 ohms max.
D.C. RESISTANCE	7-8 tie(7+9, 8+10), @20°C	0.050 ohms max.
INDUCTANCE	1-3 tie(1+2, 3+4), 250kHz, 700mVAC, Ls	112.0uH ±10%
LEAKAGE INDUCTANCE	1-3 tie(1+2, 3+4, 5+6, 7+8+9+10), 250kHz, 100mVAC, Ls	1.5uH max.
DIELECTRIC	1-7 tie(1+2+5, 7+9), 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(3-1):(7-8)	3:1, ±1%
URNS RATIO	(3-1):(9-10)	3:1, ±1%
URNS RATIO	(3-1):(5-6)	6:1, ±1%
URNS RATIO	(3-1):(4-2)	1:1, ±1%

GENERAL SPECIFICATIONS:
 OPERATING TEMPERATURE RANGE: -40°C to +125°C.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel		Angles: ±1°	TRANSFORMER	750310927
		PKG-0267		Decimals: ±.005 [.13]		
		www.we-online.com/midcom		Fractions: ±1/64		
				Footprint: ±.005 [.13]		
6B	5/10	SEE REVISION SHEET FOR	REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750310927	SPECIFICATION SHEET 1 OF 1
6A	1/10					