

SHEET OF

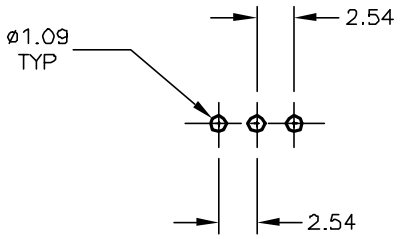



RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1

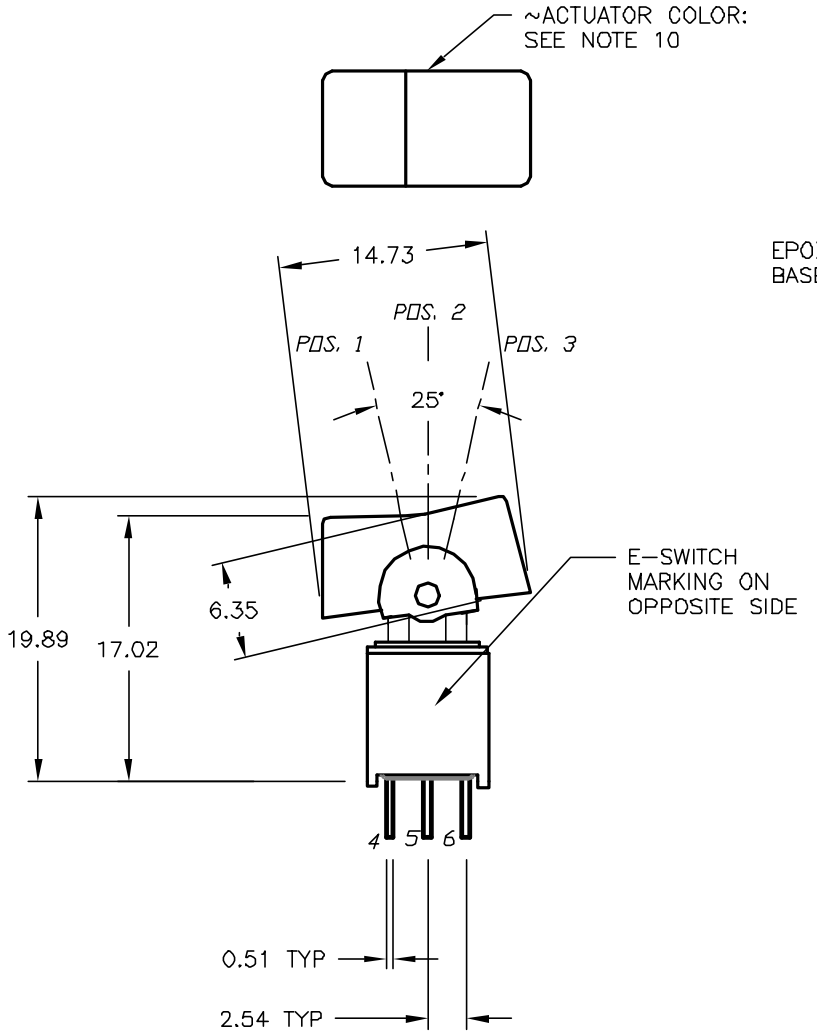

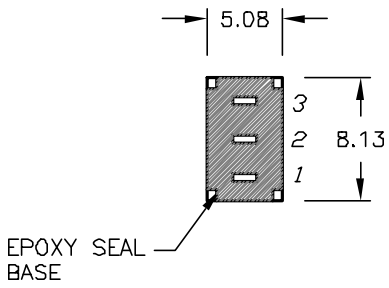

BOTTOM VIEW

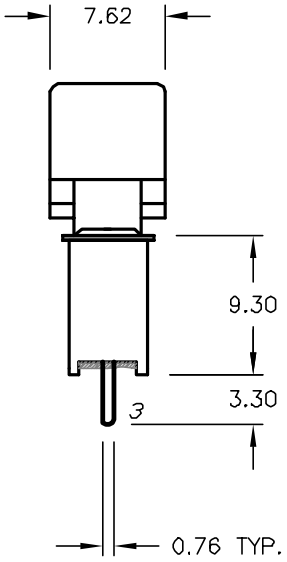

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4V @20V (AC OR DC) max.
5. ▲ FIXED TERM/MOVING CONTACT
   COPPER ALLOY W/Gold plate over Nickel plate
6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK
   CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1000M OHM TYPICAL
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
9. OPERATING TEMP.: -30°C to +85°C
10. ACTUATOR: NYLON BLACK (UL94-HB)

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12207	RELEASED FOR PRODUCTION	2/27/03	CB

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 400A WMSP-1 R1 (BLK) M2 RE (GOLD CONTACTS)

SCALE	DATE	DR	DWG	REV
2:1	2/27/03	CB	T403011	A